

Product information presented here reflects conditions at time of publication. Consult factory regarding discrepancies or inconsistencies.



PUMP COMPANY

Zoeller Family of Water Solutions™

MAIL TO: P.O. BOX 16347 • Louisville, KY 40256-0347
SHIP TO: 3649 Cane Run Road • Louisville, KY 40211-1961
(502) 778-2731 • 1 (800) 928-PUMP • FAX (502) 774-3624

FM0518
0311
Supersedes
0110

visit our web site:
www.zoeller.com

REPLACEMENT PARTS LIST FOR MODELS:


M268 AUTOMATIC 115V
D268 AUTOMATIC 230V
N268 NONAUTOMATIC 115V
E268 NONAUTOMATIC 230V

Consult factory for all other models


TO ORDER REPLACEMENT PARTS:

PLEASE FURNISH THE FOLLOWING INFORMATION:


- Model Number.
- Part Number of Pump.
(If manufactured prior to June 1988, give 2 letter date code following Model No.)
- Part Number and Description of part.

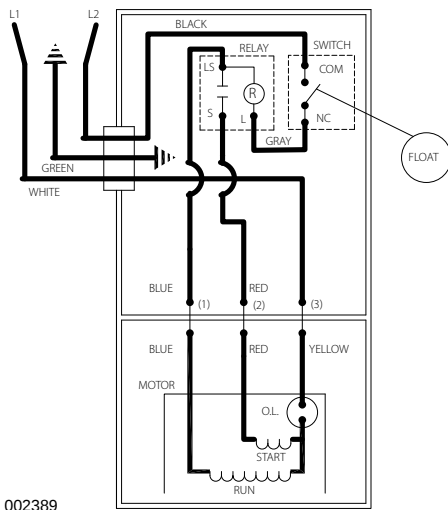

WIRING DIAGRAM FOR MODELS
"M268-A", "M268-B"
"D268-A", "D268-B"
4/82 (PN) thru 8/86 (US)

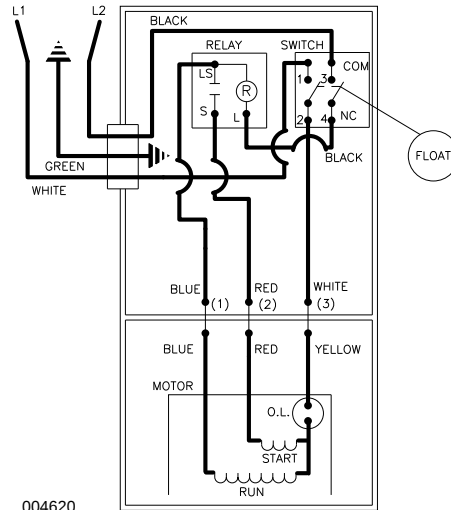

WIRING DIAGRAM FOR MODELS
"M268-C", "M268-D", "D268-C", "D268-D"
9/86 (VS) to Current

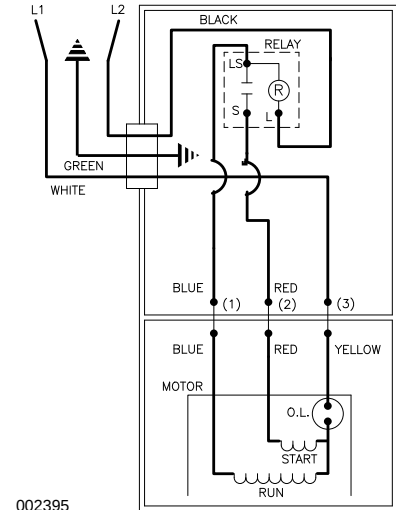

WIRING DIAGRAM FOR MODELS
"N268-A", "N268-B", "N268-C", "N268-D"
"E268-A", "E268-B", "E268-C", "E268-D"
4/82 (PN) to Current

REPLACEMENT PARTS LIST FOR MODELS "M268" & "D268"

See back page for "M268" & "D268" illustration.

MODELS: M268-A								M268-B	M268-C	M268-D		D268-A	D268-B	D268-C	D268-D
REF. NO.	DESCRIPTION	QTY	NOTES	4/82 PN thru 10/83 WO	11/83 XO thru 8/86 US	9/86 VS thru 6/91	7/91 thru Current					4/82 PN thru 10/83 WO	11/83 XO thru 8/86 US	9/86 VS thru 6/91	7/91 thru Current
1	Case & Switch Asm "130/260"	1	3	267047	267047	004739	004739					267047	267047	004739	004739
2	• Handle	1		267032	267032	267032	267032					267032	267032	267032	267032
3	Case-Mach "137/267/268"	1	3	267016	267016	004610	004610					267016	267016	004610	004610
4	• Gasket, Case/Cover	1		267007	267007	267007	267007					267007	267007	267007	267007
5	Relay Asm 115V/G5	1		002474	002474	002474	002474					147135	147135	147135	147135
6	• Wire Pkg (2) Wires	1		267014	267014	267014	267014					267014	267014	267014	267014
7	Housing, Mtr & Str 115V/1Ph GE	1	1,2	002475	002475	002475	002475					002476	002476	002476	002476
	Housing, Mtr & Str 115V/1Ph EMD	1	1,2	004003	004003	004003	004003					005534	005534	005534	005534
8	Cord Term & Seal Asm 115V	1	3,4	267033	267033	094071	094071					267034	267034	094072	094072
9	• Seal, Cord-Asm & Strain Relief	1	3	094032	094032	094032	094032					094032	094032	094032	094032
10	Bearing, Upper Rotor	1		034052	034052	NA	NA					034052	034052	NA	NA
11	• Guard	1		267008	267008	267008	267008					267008	267008	267008	267008
12	• Arm & Seal Asm "130/260"	1	3	267018	267018	004741	004741					267018	267018	004741	004741
13	Switch Asm "130/260"	1	3	267015	267015	004740	004740					267015	267015	004740	004740
▫	Lead Wire (Gray)	1		002227	002227	NA	NA					002227	002227	NA	NA
14	Float-Polypropylene	1		034019	034019	034019	034019					034019	034019	034019	034019
15	Rod, Float	1		147047	147047	147047	147047					147047	147047	147047	147047
16	Rotor Asm 115/230V/1Ph GE	1	2	267005	267005	267005	267005					267005	267005	267005	267005
	Rotor Asm 115/230V/1Ph EMD	1	2	004021	004021	004021	004021					004021	004021	004021	004021
17	• Seal, Mtr Hsg	1		267006	267006	267006	267006					267006	267006	267006	267006
18	• Washer, Trst-Nyl.875X.504X.050"	1		002140	002140	002140	002140					002140	002140	002140	002140
19	Housing, Pump-Mach "268"	1		003429	003883	003883	003883					003429	003883	003883	003883
20	• Seal Asm, Shaft-Blister Pak	1		267027	267027	267027	267027					267027	267027	267027	267027
21	Impeller "267/268"	1		267029	003884	003884	150857					267029	003884	003884	150857
22	Base-Mach "267/268"	1		003431	008646	008646	008646					003431	008646	008646	008646
23	Guide Asm, Flt Rod	1		094048	094048	004676	004676					094048	094048	004676	004676
24	Bearing, Sleeve-Lower Rotor	1		054024	NA	NA	NA					054024	NA	NA	NA
25	• Oil, Dielectric (24.5 Oz Can)	1		267056	267056	267056	267056					267056	267056	267056	267056
26	• Seal, Thru Wall Term	3		003402	003402	003402	003402					003402	003402	003402	003402
27	• Plug, Test-White	2	4	034090	034090	034090	034090					034090	034090	034090	034090
28	• Clamp, Strain Relief-Red	1		001770	001770	001770	001770					001770	001770	001770	001770
29	• Screw, .25-20 X .75 HHm-SS	9		001916	001916	001916	001916					001916	001916	001916	001916
30	• Screw, #10-24 X.375 RHM-SI SS	3		001883	001883	001883	001883					001883	001883	001883	001883
31	• Screw, #6-32x.438Rhs1tp1"Stlzi	2		001877	001877	004644	004644					001877	001877	004644	004644
32	• Screw, #6-32x.25RHM SI Tc Stlgr	3		001877	001877	001877	001877					001877	001877	001877	001877
33	• Screw, .25-20 X .875 HH SS	4		012491	012491	012491	012491					012491	012491	012491	012491
▫	Rebuild Kit			267059	267059	004743	004743					267059	267059	004743	004743

• Items included in Rebuild Kit.

▫ Not shown in illustration.

NOTES:

- 1) Mtr. Hsg., Brg., Stator & Term (Item 7) are preassembled at the factory and must be replaced as a unit. Stator is permanently attached to the Motor Housing. Plug (Item 27); Seal, Thru Wall Term. (Item 26) and Bearing - Upper (Item 10) are replaceable.
- 2) When ordering Motor Housing, Bearing, Stator and Term. (Item 7) or Rotor (Item 16) specify either GE or Emerson motor. GE motor can be identified by (4) half oval slots spaced at 90° around the outside diameter of the stator. Emerson motor can be identified by (2) half oval slots spaced at 180° around the outside diameter of the stator.
- 3) When ordering these parts, customer must identify if switch is a General Electric switch.
- 4) If an "X" follows Model No., or Date Mfg. on brass ID tag, consult factory for ordering any parts.
- 5) See FM0160 Parts Price Sheet for listing of parts prices.
- 6) "NA" indicates, not applicable.

DATE CODE OF MANUFACTURE FROM 12/70 to 12/88

1st LETTER MONTH				2nd LETTER YEAR			
M --- JAN.	T --- JULY	A --- 1971	G --- 1977	O --- 1983			
N --- FEB.	U --- AUG.	B --- 1972	H --- 1978	P --- 1984			
O --- MARCH	V --- SEPT.	C --- 1973	I --- 1979	R --- 1985			
P --- APRIL	W --- OCT.	D --- 1974	J --- 1980	S --- 1986			
R --- MAY	X --- NOV.	E --- 1975	M --- 1981	T --- 1987			
S --- JUNE	Y --- DEC.	F --- 1976	N --- 1982	U --- 1988			

NOTE: Four digit (MMYY) date of mfg. used after June, 1988.
IE: MMYY = 0192 = Jan. 1992.

REPLACEMENT PARTS LIST FOR MODELS "N268" & "E268"

See back page for "N268" & "E268" illustration.

MODELS: N268-A								N268-B	N268-C	N268-D		E268-A	E268-B	E268-C	E268-D
REF. NO.	DESCRIPTION	QTY	NOTES	4/82 PN thru 10/83 WO	11/83 XO thru 8/86 US	9/86 VS thru 6/91	7/91 thru Current					4/82 PN thru 10/83 WO	11/83 XO thru 8/86 US	9/86 VS thru 6/91	7/91 thru Current
1	Cover & Handle Asm	1		267051	267051	267051	267051					267051	267051	267051	267051
2	• Handle	1		267032	267032	267032	267032					267032	267032	267032	267032
3	Cover-Mach	1		267052	267052	267052	267052					267052	267052	267052	267052
4	Retainer, HdL-Na	1		267053	267053	267053	267053					267053	267053	267053	267053
5	• Gasket, Case/Cover	1		267007	267007	267007	267007					267007	267007	267007	267007
6	Relay Asm 115V/G5	1		002474	002474	002474	002474					147135	147135	147135	147135
7	• Wire Pkg (2) Wires	1		267014	267014	267014	267014					267014	267014	267014	267014
8	Housing, Mtr & Str 115V/1Ph GE	1	1,2	002475	002475	002475	002475					002476	002476	002476	002476
	Housing, Mtr & Str 115V/1Ph EMD	1	1,2	004003	004003	004003	004003					005534	005534	005534	005534
9	Cord Term & Seal 15/115V	1	3	003617	003617	003617	003617					003618	003618	003618	003618
10	• Seal, Cord-Asm & Strain Relief	1	3	094032	094032	094032	094032					094032	094032	094032	094032
11	Bearing, Upper Rotor	1		034052	034052	NA	NA					034052	034052	NA	NA
12	Rotor Asm 115/230V/1Ph GE	1	2	267005	267005	267005	267005					267005	267005	267005	267005
	Rotor Asm 115/230V/1Ph EMD	1	2	004021	004021	004021	004021					004021	004021	004021	004021
13	• Seal, Mtr Hsg	1		267006	267006	267006	267006					267006	267006	267006	267006
14	• Washer, Trst-Nyl.875X.504X.050"	1		002140	002140	002140	002140					002140	002140	002140	002140
15	Housing, Pump-Mach "268"	1		003429	003883	003883	003883					003429	003883	003883	003883
16	Bearing, Sleeve-Lower Rotor	1		054024	NA	NA	NA					054024	NA	NA	NA
17	• Oil, Dielectric (24.5 Oz Can)	1		267056	267056	267056	267056					267056	267056	267056	267056
18	• Seal Asm,Shaft-Blister Pak	1		267027	267027	267027	267027					267027	267027	267027	267027
19	Impeller "267/268"	1		267029	003884	003884	150857					267029	003884	003884	150857
20	Base-Mach "267/268"	1		003431	008646	008646	008646					003431	008646	008646	008646
21	• Seal, Thru Wall Term	3		003402	003402	003402	003402					003402	003402	003402	003402
22	• Plug, Test-White	2	3	034090	034090	034090	034090					034090	034090	034090	034090
23	• Clamp, Strain Relief-Red	1		001770	001770	001770	001770					001770	001770	001770	001770
24	• Screw, .25-20 X .75 HHm-SS	13		001916	001916	001916	001916					001916	001916	001916	001916
25	• Screw, #10-24 X.375 RHM-SI SS	3		001883	001883	001883	001883					001883	001883	001883	001883
26	• Screw, #6-32x.25RHM SI Tc Stlgr	3		001877	001877	001877	001877					001877	001877	001877	001877
27	• Screw, .25-20 X .875 HH SS	4		012491	012491	012491	012491					012491	012491	012491	012491
□	Rebuild Kit "130/260"			267059	267059	004743	004743					267059	267059	004743	004743

• Items included in Rebuild Kit.

□ Not shown in illustration.

NOTES:

- 1) Mtr. Hsg., Brg., Stator & Term (Item 8) are preassembled at the factory and must be replaced as a unit. Stator is permanently attached to the Motor Housing. Plug (Item 22); Seal, Thru Wall Term. (Item 21) and Bearing - Upper (Item 11) are replaceable.
- 2) When ordering Motor Housing, Bearing, Stator and Term. (Item 8) or Rotor (Item 12) specify either GE or Emerson motor. GE motor can be identified by (4) half oval slots spaced at 90° around the outside diameter of the stator. Emerson motor can be identified by (2) half oval slots spaced at 180° around the outside diameter of the stator.
- 3) If an "X" follows Model No., or Date Mfg. on brass ID tag, consult factory for ordering any parts.
- 4) See FM0160 Parts Price Sheet for listing of parts prices.
- 5) "NA" indicates, not applicable.



PUMP COMPANY

MAIL TO: P.O. BOX 16347 • Louisville, KY 40256-0347
SHIP TO: 3649 Cane Run Road • Louisville, KY 40211-1961
(502) 778-2731 • 1 (800) 928-PUMP • FAX (502) 774-3624

Your Peace of Mind is Our Top Priority™

© Copyright 2011 Zoeller Co. All rights reserved.

visit our web site:
www.zoeller.com

