

# Submittal Data: System 24CL1 ASU24CL1 & AOU24CL1



Job Name: \_\_\_\_\_ Location: \_\_\_\_\_

Purchaser: \_\_\_\_\_

Engineer: \_\_\_\_\_

Submitted To: \_\_\_\_\_ For:  Reference  Approval  Construction

Submitted By: \_\_\_\_\_

Unit Designation: \_\_\_\_\_ Schedule No. \_\_\_\_\_ Model No.: \_\_\_\_\_

**Capacities:**

Cooling	24,000 BTU/h
Outdoor Design Temperature <i>F° DB/WB</i>	95/75
SEER	17.5

**Indoor Unit:**

Power Supply	230 V
Noise Level Cooling <i>db (A) - H/ M/ L/ Q</i>	48/42/37/33
Weight	31 lbs.



**Outdoor Unit:**

Power Supply	230 V
Recommended Fuse Size	20A
Min. Ampacity	10.5A
Running Current <i>Cooling</i>	10.5A
Weight	88 lbs.

**Refrigerant Piping:**

Max Ht. Difference	66 ft.
Max Total or Combined Length	98 ft.
Discharge Vapor Line (O.D.)	1/4 in.
Suction (O.D.)	5/8 in.

**OUTLINE AND DIMENSIONS**

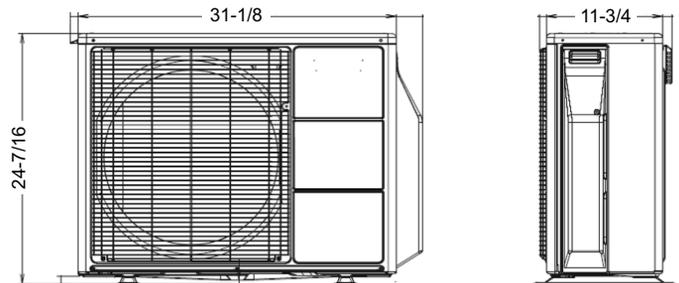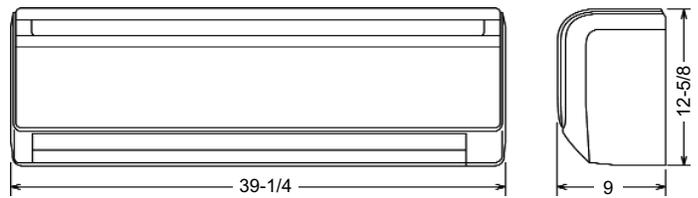

**Standard Features:**

- ◆ Seven year compressor warranty
- ◆ Five year parts warranty
- ◆ Digital wireless remote control
- ◆ Auto Louver: 4 Way
- ◆ Auto Mode
- ◆ Ion Deodorizing Filter
- ◆ Sleep timer
- ◆ Built in Low Ambient
- ◆ Auto Restart/ Reset
- ◆ 24 hour timer
- ◆ Power Diffuser
- ◆ Apple Catechin Filter
- ◆ Optional Wired Remote Control
- ◆ Dry mode
- ◆ Refrigerant R410A
- ◆ Quiet Mode
- ◆ Cold Prevention
- ◆ Coil Dry Mode

**Notes:**

---



---



---