
PRODUCT SPECIFICATION DRAWING HOLDRITE® #707-E POP-UP™

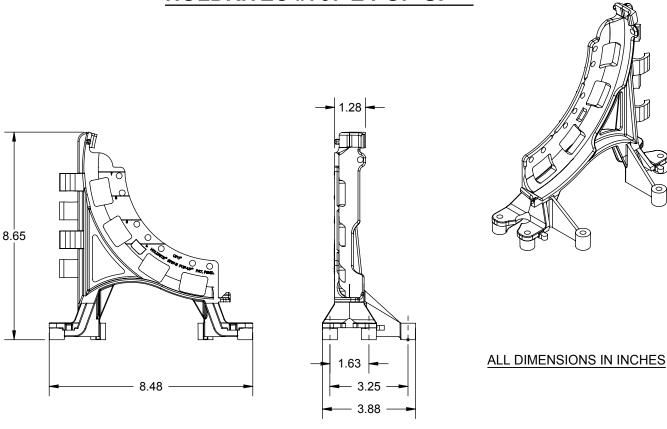

The HOLDRITE® #707-E POP-UP™ supports flexible pipe and tubing lines or rigid conduit up to 1" IPS in a 90° pattern. Ideal for positioning in-slab piping prior to concrete slab pouring. For elevated slabs, nail or screw bracket to form decking or edge form. For slab-on-grade (ground work), secure bracket with #4 rebar driven into the ground. Piping is attached to bracket with zip ties (3 included).

## **Product Information:**

Material: Reinforced Polypropylene

Temperature range "post install": -10°F to +190°F

Load rating: 25 pounds

Patent Pending



**Product Submittal** 

Qty:

Job Name: Date: