

EP Valved Manifold Valve Cylinder

Submittal Information

Revision A: April 22, 2008

Project Information

Job Name:

Location:

Engineer:

Contractor:

Manufacturer's Representative:

Part No. Ordered:

Date Submitted:

Submitted By:


Approved By:

Technical Data

Material: ACUDEL Polyphenylsulfone

Product Information and Application Use

The replacement EP Valved Manifold Valve Cylinder comes with assembled o-rings and is used for replacement of valves on an EP Valved Manifold.

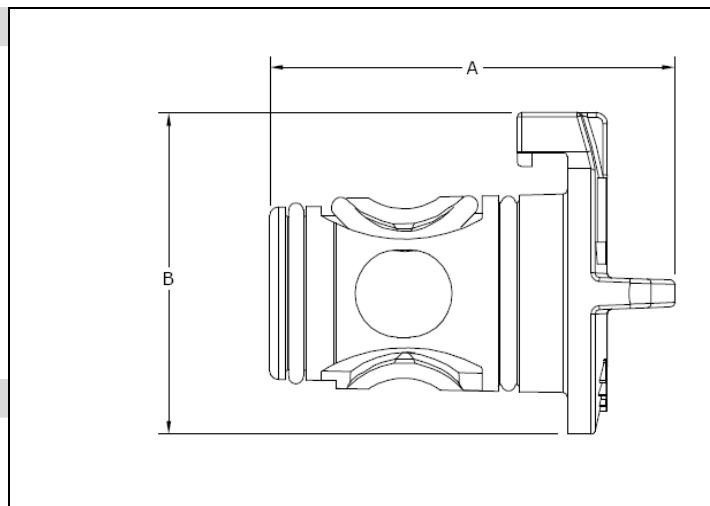

✓ Description	Part Number	A	B	Weight
EP Valved Manifold Valve Cylinder with o-rings	Q2120050	1.88"	1.45"	0.01 lbs.

Installation

Do not use thread sealant on connections. Carriers present in these compounds can crack the plastic port connections, resulting in leaks and water damage. Any bend within 6 inches of the ProPEX[®] connection to the manifold requires the use of a Tube Talon or Bend Support.¹ Refer to the Uponor Engineered Plastic (EP) Valved Manifolds Installation Guide for further instructions.

Standards

CAN/CSA B137.5; ASTM F877

Codes

NPC of Canada

Listings

ANSI/NSF 14- and 61-certified

Related Applications

PEX-a Plumbing Systems

Contact Information

Uponor, Inc.
5925 148th Street West
Apple Valley, MN 55124 USA
Phone: (800) 321-4739
Fax: (952) 891-2008
www.uponor-usa.com

Uponor Ltd.
655 Park Street
Regina, SK S4N 5N1 CANADA
Phone: (888) 994-7726
Fax: (800) 638-9517
www.uponor.ca

¹ProPEX[®] is a registered trademark of Uponor, Inc. ProPEX[™] is a trademark of Uponor Ltd.