



Submittal Data Information

Radiant Mixing Block

101-095

Effective: February 1, 2004

Supersedes: New

Job: _____ Engineer: _____ Contractor: _____ Rep: _____

ITEM NO.	MODEL NO.	IMP. DIA.	G.P.M.	HEAD/FT.	H.P.	ELEC. CHAR.

Features


- All-in-One Injection Piping, Pumping, Air Elimination, & Control Package
- Only 4 Pipe Connections Required
- Plug-in Low Voltage Connections
- Solid State Microprocessor Design
- Greatly Decreases Installation Time
- Substantial Space Savings
- Line Cord Included, Hard Wire Option
- Bronze Casing for Open or Closed Systems
- Replaceable Cartridge Design
- Maintenance Free, Wet-Rotor Circulators
- 3 Operation Modes: Outdoor Reset, Setpoint, or Delta T with Limit
- Powered or Unpowered Demand Signal
- Integral Check Valve
- Main System Pump Contact
- 100% Pump Operation / Control Override Switch
- Automatic Pump Exercise
- Adjustable Reset Ratio
- Warm Weather Shutdown
- Boiler Control or Enable Setting
- Boiler Protection
- Large LCD Display
- C° or F°
- Outdoor and 2 Strap-on Sensors included

Performance Data

Flow Range: 0 – ? GPM
 Head Range: 0 – ? Feet
 Minimum Fluid Temperature: 32°F (0°C)
 Maximum Fluid Temperature: 185°F (85°C)
 Maximum Working Pressure: 125 psi
 Connection Sizes: 3/4" NPT

FOR INDOOR USE ONLY


Performance Field

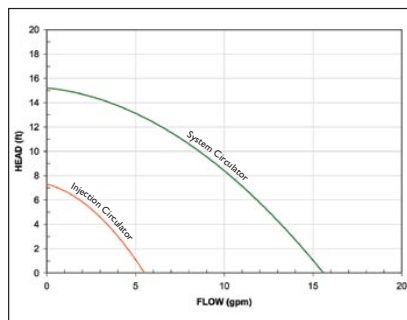


Application

The Taco Radiant Mixing Block (RMB) is a complete injection mixing system. Integral to the unit is a variable speed injection circulator, constant speed system circulator, air elimination, and the electronics to drive it all. With only four piping connections needed, the RMB greatly reduces the time and space required for installation (see Fig. A). The RMB can be set up to operate as an outdoor reset control, a setpoint control or a delta T limiting control, creating flexibility never seen before in a single unit.

Fig. A

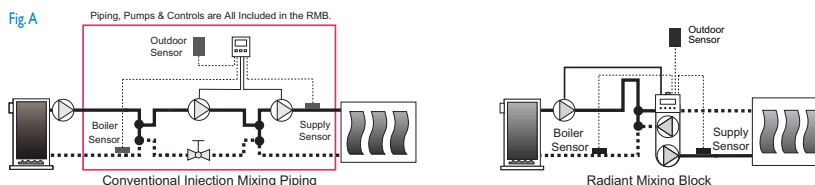


Operation



Hot water from the boiler loop enters the RMB at the Boiler Supply port (A). The cooler return water from the radiant loops enters at the System Return port (B). In the middle of these two ports, any air in the system is purged through the integral Taco Hy-Vent. The injection circulator varies in speed to blend the two temperatures, injecting the excess required temperature back through the Boiler Return port (C). The constant speed system circulator delivers the required blended water temperature to the radiant loop through the Radiant Supply port (D).


Sizing and Piping

The Radiant Mixing Block can handle radiant load demands of up to 120,000 BTU's. Your current method of zoning the radiant loops (manifolds, zone valves, etc.) does not change with the installation of the RMB. Multiple Radiant Mixing Blocks can be used to separate the distinctive temperature requirements between manifolds. No special piping, just 4 connections and your installation is complete.

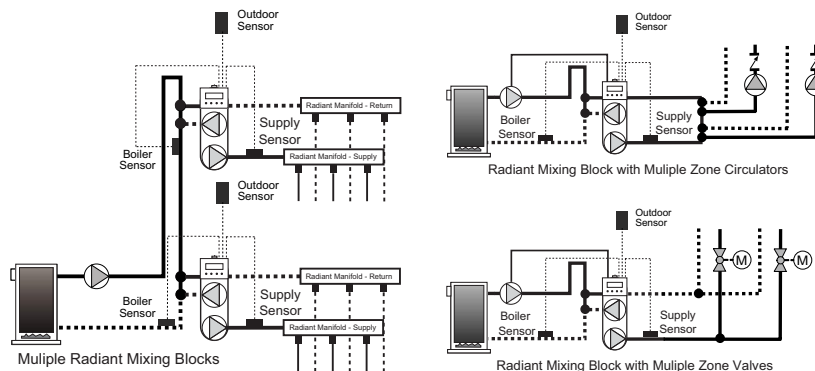

Electrical & Weight Data

Model	Volts	Hz	Ph	Amps	RPM	HP	Ship Wt.
RMB-I	120	60	1	2	3250	1/40 & 1/25	lbs. Kg
Motor Type	Permanent Split Capacitor Impedance Protected						18.5 8.4



Do it Once. Do it Right.

Taco, Inc., 1160 Cranston Street, Cranston, RI 02920 Telephone: (401) 942-8000 Fax: (401) 942-2360

Taco (Canada), Ltd., 6180 Ordan Drive, Mississauga, Ontario L5T 2B3 Telephone: (905) 564-9422 Fax: (905) 564-9436

Visit our website at: www.taco-hvac.com

Printed in USA
 Copyright 2005
 TACO, Inc.