

## EP Valved Manifold ProPEX® Inlet

Submittal Information  
Revision A: Feb. 5, 2008

### Project Information

Job Name:

Location:

Part No. Ordered:

Engineer:

Date Submitted:

Contractor:


Submitted By:

Manufacturer's Representative:

Approved By:

### Technical Data

Material: ACUDEL Polyphenylsulfone

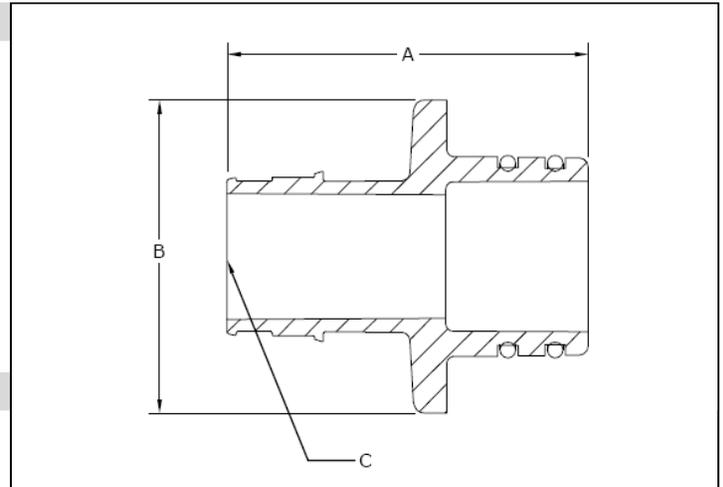

### Product Information and Application Use

EP Valved Manifold ProPEX® Inlet connects 3/4" and 1" Wirsbo AQUAPEX® tubing to the manifold.<sup>1</sup>

✓ Description	Part Number	A	B	C	Weight
EP Valved Manifold 3/4" ProPEX Inlet	Q2120750	2.13"	2.04"	3/4" ProPEX	0.70 lbs.
EP Valved Manifold 1" ProPEX Inlet	Q2121000	2.13"	2.04"	1" ProPEX	0.80 lbs.

### Installation

Do not use thread sealant on connections. Carriers present in these compounds can crack the plastic port connections, resulting in leaks and water damage. Any bend within 6 inches of the ProPEX connection to the manifold requires the use of a Tube Talon or Bend Support. Refer to the Uponor Professional Plumbing Installation Guide for further instructions.

### Standards

CAN/CSA B137.5; ASTM F877; ASTM F1960

### Codes

IPC; UPC; NSPC; NPC of Canada

### Listings

IAPMO 3558; HUD MR 1269; ICC ESR 1099; ANSI/NSF 14- and 61-certified

### Related Applications

PEX-a Plumbing Systems

### Contact Information

Uponor, Inc.  
5925 148<sup>th</sup> Street West  
Apple Valley, MN 55124 USA  
Phone: (800) 321-4739  
Fax: (952) 891-2008  
www.uponor-usa.com

Uponor Ltd.  
655 Park Street  
Regina, SK S4N 5N1 CANADA  
Phone: (888) 994-7726  
Fax: (800) 638-9517  
www.uponor.ca

<sup>1</sup>ProPEX® is a registered trademark of Uponor, Inc. ProPEX™ is a trademark of Uponor Ltd.