

Three Way Mixing Valve 3/4" - 2"

Three way mixing valves regulate fluid temperature to the system from the heat source. These valves are ideal for mixing fluid to control temperature in heating, cooling, and snow ice melting applications. The valves can be controlled both manually or automatically with the use of actuator (Stock Code 20042)

Features

- Compact and lightweight
- Versatile for numerous piping configurations
- Dezincification resistant brass (CW 602N)
- Simple adjustable scale indicating valve position
- Adjustable valve position scale

Specifications


Fluid temperature limits: 14°F- 230°F

Max operating pressure: 145 psi

Max differential pressure: 14.5 psi

Max glycol mixture: 50%

Materials: brass valve body (CW 602N)
PPS composite shaft and
bushing EPDM O-Ring

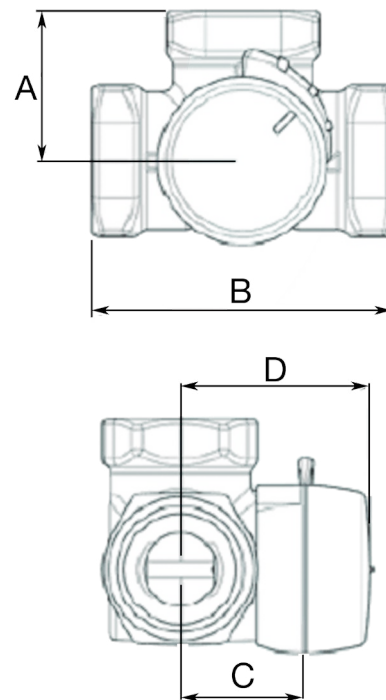

Stock Code	Size	Type	A (in)	B (in)	C (in)	D (in)	Weight (lbs)	CV Value	Flow (gpm)	Heat Capacity (BTU/H)	Pressure drop (psi)	Pressure Drop (ft of head)
20080	3/4"	NPT	1.42	2.83	1.26	1.97	0.95	7.3	5 7	50,000 70,000	0.7 1.0	1.6 2.2
20081	1"		1.61	3.23	1.34	1.54	1.54	11.7	12 17	120,000 170,000	1.0 2.1	2.4 4.8
20082	1-1/4"		1.85	3.70	1.46	2.09	2.09	18.7	19 24	190,000 240,000	1.0 1.6	2.3 3.7
20083	1-1/2"		2.09	4.17	1.73	3.7	3.7	29.3	29 34 38	290,000 340,000 380,000	1.0 1.2 1.7	2.2 2.7 3.8
20084	2"		2.36	4.72	1.81	5.07	5.07	46.8	47 53 59 65	470,000 530,000 590,000 650,000	1.0 1.1 1.3 1.9	2.3 2.8 2.9 4.4

Note: Heat capacity is based on water at a ΔT of 20°F. The fluid used to calculate pressure drop across the valve is water @ 100°F

Viega... The global leader in plumbing, heating and pipe joining systems

301 N. Main, 9th Floor • Wichita, KS 67202 • Ph: 800-976-9819 • Fax: 316-425-7618 • www.viega.com

©2011, ProPress®, FostaPEX®, Seapress®, MegaPress®, MegaPressG® and Viega® are registered trademarks of Viega GmbH & Co. PureFlow®, Smart Connect®, Climate Panel®, Climate Mat®, Climate Trak®, MANABLOC®, Radiant Wizard®, S-no-Ice®, Snap Panel®, XL® and XL-C® are registered trademarks of Viega LLC. MiniBloc™, ProRadiant™, PolyAlloy™, SmartLoop™ and Zero Lead™ are trademarks of Viega LLC; GeoFusion™, ProPressG™ and ViegaPEX™ are trademarks of Viega GmbH & Co. KG.

TD-PR-20060 0312 (Three Way Mixing Valve)