

# SPECIFICATION SUBMITTAL SHEET



## FEATURES

Sizes:	<input type="checkbox"/> 3/4" <input type="checkbox"/> 1"
Maximum working water pressure	300 psi
Maximum working water temperature	140°F
Reduced pressure range	25 psi to 75 psi
Factory preset	50 psi
Threaded connections (FNPT)	ANSI B1.20.1
Copper connections (FC)	ANSI B16.22
CPVC tailpiece: Max. hot water temp.	140°F @ 100 psi
Cold water rated temp.	73.4°F @ 400 psi

## OPTIONS

(Suffixes can be combined)

- ☐ - standard with single union FNPT connection and 20 mesh strainer screen
- ☐ C - with FC (copper sweat) union connection
- ☐ CH - chrome plated cartridge (3/4" & 1")
- ☐ DM - double male meter thread connection, 1" National Hose Thread fits 5/8" x 3/4" and 3/4" water meters (less union; #34-70DM)
- ☐ DU - with double union FNPT connection
- ☐ DUCM - with double union male copper sweat (3/4"-1)
- ☐ LU - less union assembly, female x female NPT
- ☐ P - tapped & plugged for gauge
- ☐ SC - sealed cage bell housing and stainless steel adjusting screw
- ☐ SS - sealed cage bell housing with stainless steel adjusting screw and spring
- ☐ CPVC - CPVC tailpiece connection (3/4"-1)
- ☐ LP - low pressure outlet 10-35 psi available in 1/2" & 3/4" single union, & 3/4" double union

## ACCESSORIES

- ☐ Repair kit
- ☐ Water thermal expansion tank (Model XT)
- ☐ Special in-line spacer nipple (34-70DUSPC & 1-70DUSPC)
- ☐ In-line strainer screen for DUSPC ( SCR)
- ☐ Water hammer arrester (Model 1250)
- ☐ Tailpiece kit (TPK)

## APPLICATION


Designed for installation on potable water lines to reduce high inlet pressure to a lower outlet pressure. The unitized replaceable cartridge reduces time involved with cleaning and maintenance. The direct acting integral bypass design prevents buildup of excessive system pressure caused by thermal expansion. The balanced piston design enables the regulator to react in a smooth and responsive manner to changes in system flow demand, while at the same time, providing protection from inlet pressure changes.

## STANDARDS COMPLIANCE

- ASSE® Listed 1003
- IAPMO® Listed
- CSA® Certified
- City of Los Angeles Approved

## MATERIALS

Body and bell	Cast bronze, ASTM B 584
Seat	Stainless Steel, 300 series
Stem & sleeve	Brass ASTM B 16
Elastomers	Buna nitrile, FDA (CFR) 21, 177.2600 EPDM, FDA (CFR) 21, 177.2600
Strainer screen	Stainless Steel, 300 series

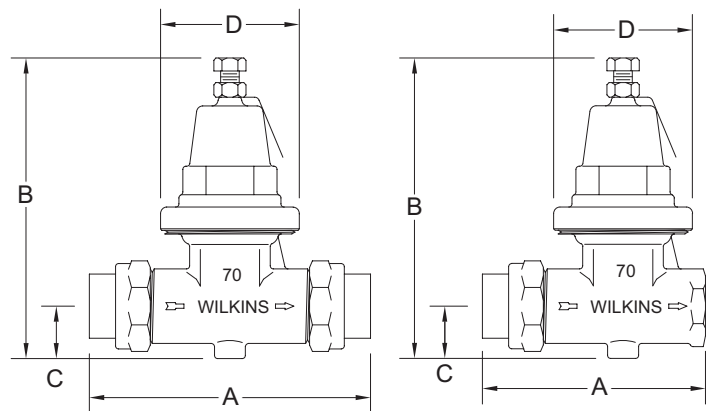


## DIMENSIONS & WEIGHTS (do not include pkg.)

SIZE		CONNECTIONS	DIMENSIONS (approximate)								WEIGHT	
			A		B		C		D			
in.	mm		in.	mm	in.	mm	in.	mm	in.	mm	lbs.	kg.
3/4	20	SINGLE UNION	4 5/8	117	6	152	1	25	2 3/4	70	2.9	1.3
3/4	20	DOUBLE UNION	6	152	6	152	1 1/8	29	2 3/4	70	3.0	1.4
1	25	SINGLE UNION	5	127	6 11/16	170	1	25	3 3/8	86	4.1	1.9
1	25	DOUBLE UNION	5 7/8	149	6 11/16	170	1 1/8	29	3 3/8	86	4.5	2.0


## FLOW CHARACTERISTICS

### MODEL 70 3/4" & 1" (STANDARD & METRIC)

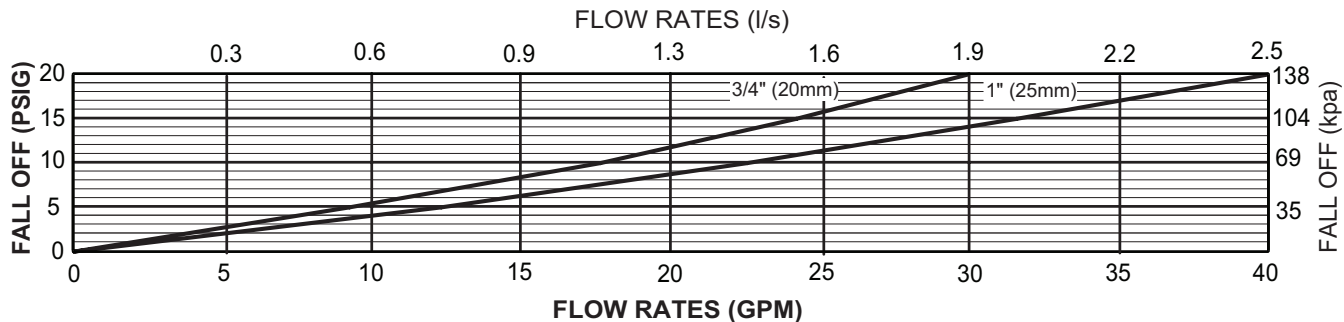

### TYPICAL INSTALLATION

Local codes shall govern installation requirements. Unless otherwise specified, the assembly shall be mounted in accordance with the manufacturer's instructions and the latest edition of the Uniform Plumbing Code. The assembly shall be installed with sufficient side clearance for testing and maintenance. The Model 70 may be installed in any position. If installed in a pit, vault or indoors, specify the "SC" sealed cage option. Multiple installations are recommended for wide demand variations or where the desired pressure reduction is more than 4 to 1 (i.e.: 200 psi inlet reduced to 50 psi outlet). **CAUTION:** Anytime a reducing valve is adjusted, a pressure gauge must be used downstream to verify correct pressure setting. Do not bottom adjustment bolt on bell housing.

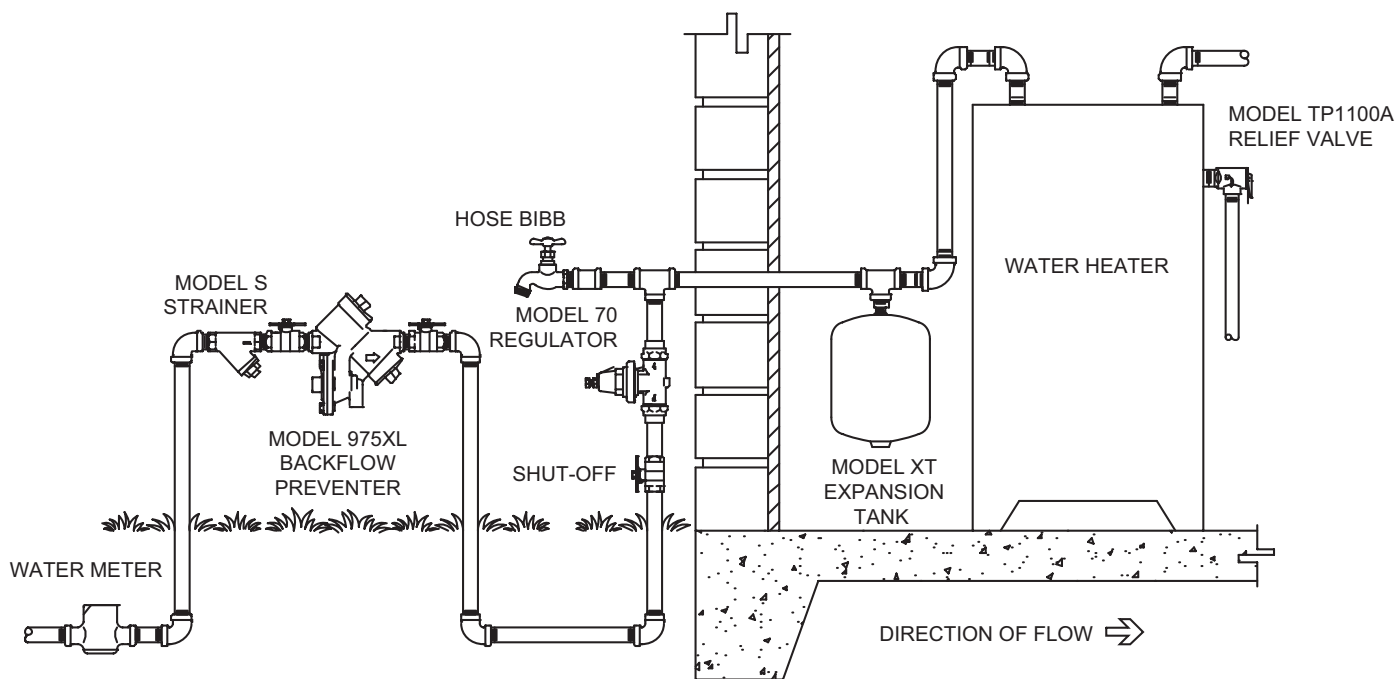

### TYPICAL INSTALLATION

### SPECIFICATIONS

The Pressure Reducing Valve shall be, of the direct-acting type and ASSE® 1003 Listed. The integral bypass check valve main body and bell housing shall be cast bronze (ASTM B 584). The pressure reducing valve shall be of the balanced piston design and shall reduce pressure in both flow and no-flow conditions using an adjusting bolt. All internal parts shall be corrosion resistant and included in a replaceable cartridge. The bronze bell housing shall be threaded to the body and shall not require the use of ferrous screws. The Pressure Reducing Valve shall be a WILKINS Model 70.

WILKINS a Zurn company, 1747 Commerce Way, Paso Robles, CA 93446 Phone: 805-238-7100 Fax: 805-238-5766

IN CANADA: ZURN INDUSTRIES LIMITED, 3544 Nashua Dr., Mississauga, Ontario L4V 1L2 Phone: 905-405-8272 Fax: 905-405-1292

Product Support Help Line: 877-BACKFLOW (877-222-5356) • Website: <http://www.zurn.com>