

THIS SPACE FOR DESIGNER/ENGINEER APPROVAL

Job/Customer _____	Date _____	Contractor _____
Model Specified _____	Qty _____	Approved By _____
Designer/Engineer _____	Date _____	Contractor's PO# _____
Submitted by _____	Date _____	Other _____

41672

**Full Port Forged Brass Ball Valves
w/ Hi-Flow Hose Drain**

1/2" FIP x MIP x FIP x HOSE

600 WOG



ISO 9001



ITEM#	SIZE	CTN	CASE	A	B	C	D	E	F
41672	1/2"	1	30	1/2	3 3/8	1 9/16	1 1/8	1 3/16	2 5/16



NO.	DESCRIPTION	MATERIAL
1	BODY	BRASS
2	SEAT	PTFE
3	BALL	BRASS HCP
4	END CAP	BRASS
5	CAP	BRASS
6	WASHER	EPDM
7	STEM	BRASS
8	STEM SEAL	PTFE
9	PACKING GLAND	BRASS
10	HANDLE	ENAMEL COATED ALUMINUM
11	HANDLE SCREW	BRASS
12	STRAP	EPDM

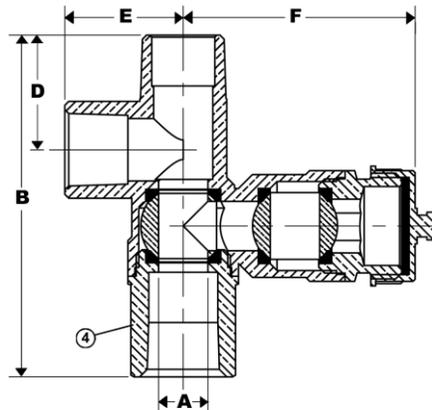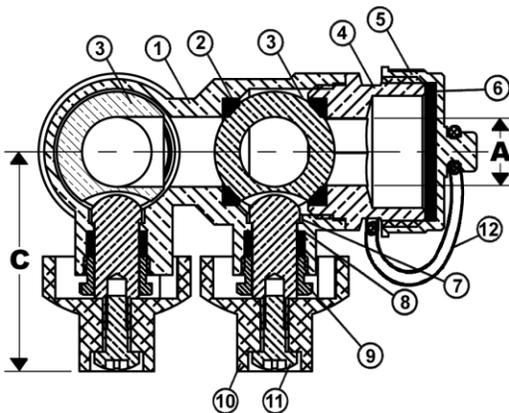

TEMP °F	PSI
100	600
150	490
200	470
250	439
300	411
350	294
366	N/A

Specifications: Designed for residential or light commercial use with water or oil. This approved Webstone valve allows for isolation and draining of an expansion tank in a closed loop hydronic heating system. It is actuated by a blowout proof stem and features an adjustable packing gland. Threaded ends comply with ANSI B1.20.1.

Webstone
VALVE INNOVATION

Quality and Commitment Since 1954

www.webstonevalves.com P: (800) 225-9529 F: (800) 336-5133

Webstone product specifications in U.S. customary units are approximate and are provided for reference only. Webstone reserves the right to change or modify product design, construction, specifications or materials without prior notice and without incurring any obligation to make such changes and modifications on Webstone products previously or subsequently sold.

41762spec_050112