
THIS SPACE FOR DESIGNER/ENGINEER APPROVAL					
Job/Customer	Date	Contractor			
Model Specified	Qty	Approved By			
Designer/Engineer	Date	Contractor's PO#			
Submitted by	Date	Other			

5043 Series

Full Port Forged Brass Ball Valves w/ Hi-Flow Hose Drain & Reversible Handle IPS Union x SWT 600 WOG ISO 9001



ITEM #	SIZE	CTN	CASE	Α	В	С	D	E	F
50433	3/4"	6	24	3/4	4 5/8	2	3 5/8	2 5/16	1/2
50434	1"	4	16	1	4 11/16	2 5/8	4 3/16	2 1/2	1/2
50435	1 1/4"	2	12	1 1/4	4 11/16	3	4 1/2	2 5/16	3/4
50436	1 1/2"	2	12	1 1/2	5 3/8	3 1/2	5 1/2	3 1/8	3/4

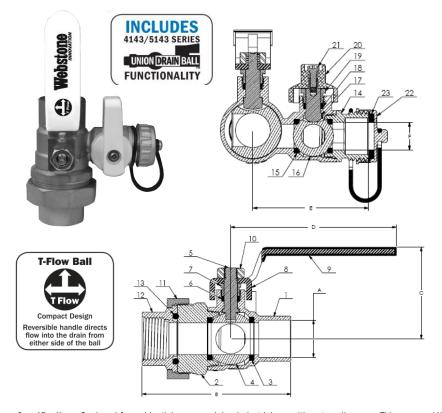

NO.	DESCRIPTION	MATERIAL
1	BODY	BRASS
2	END CAP	BRASS
3	SEAT	PTFE
4	BALL	BRASS HCP
5	STEM	BRASS
6	STEM SEAL	PTFE
7	PACKING GLAND	BRASS
8	LEVER HANDLE	STEEL CP
9	HANDLE JACKET	VINYL
10	HANDLE NUT	STAINLESS STEEL
11	UNION NUT	BRASS
12	FITTING	BRASS
13	O-RING	EPDM
14	END CAP	BRASS
15	SEAT	PTFE
16	BALL	BRASS HCP
17	STEM	BRASS
18	STEM SEAL	PTFE
19	PACKING GLAND	BRASS
20	HANDLE	ENAMEL COATED ALUMINUM
21	HANDLE SCREW	BRASS
22	CAP & STRAP	BRASS W/ EPDM STRAP
23	WASHER	EPDM

TEMP °F	PSI
100	600
150	485
200	395
250	210
300	N/A
350	N/A
366	N/A

Specifications: Designed for residential, commercial or industrial use with water, oil or gas. This approved Webstone valve is actuated by a blowout proof stem and features an adjustable packing gland. Solder joint temperature ratings are per ASME B16.18 Annex A for 95-5 solder. Other solder materials have lower pressure/temperature limits. Do not silver braze or overheat valves when soldering.



Quality and Commitment Since 1954