

Unilift CC, KP, AP

Submersible wastewater pumps
60 Hz



Contents

Mission

4

Product overview, Unilift

5

General data, Unilift

Performance range

6

Applications

7

Type keys

8

Construction

9

Unilift CC

Product description

10

Selection

11

Performance curves

12

Operating conditions

13

Installation

13

Technical data

14

Unilift KP

Product description

15

Selection

16

Performance curves

17

Installation

18

Technical data

19

Unilift AP12

Product description

20

Selection

22

Performance curves

23

Technical data

24

Unilift AP35

Product description

25

Selection

27

Performance curve

28

Technical data

29

Unilift AP35B

Product description

30

Selection

32

Performance curves

33

Technical data

34

Unilift AP50

Product description

35

Selection

37

Performance curve

38

Technical data

39

Unilift AP50B

Product description

40

Selection

42

Performance curves

43

Technical data

44

EF 33, 50, 75, 100, 150

Product description

45

EF33E

Product description

48

SE 40, 50, 75, 100, 150

Product description

50

Sewage E-paQ

Product description

53

EF25

Product description

55

SU25

Product description

57

Control panels

Model 112, simplex

59

Model 122, duplex

60

IFS 1, simplex

61

IFS 1, duplex

62

Alarms

Tank Alert® I

63

Tank Alert® 4X

64

Tank Alert® AB

65

Accessories

Mechanical float switches

66

Basins

66

Contents

Pump and system sizing instructions

Pump and system sizing instructions	68
-------------------------------------	----

Further product documentation

WebCAPS	74
WinCAPS	75

Mission

- It is our mission - the basis of our existence - to successfully develop, produce and sell high-quality pumps and pumping systems world-wide, contributing to a better quality of life and a healthy environment.



Bjerringbro, Denmark



Fresno, California



Olathe, Kansas



Monterrey, Mexico

















Allentown, Pennsylvania




Oakville, Ontario


- One of the 3 largest pump companies in the world
- The second largest manufacturer of submersible motors in the world
- World headquarters in Denmark
- North American headquarters in Kansas City - Manufacturing in Fresno, California
- 72 companies in 41 countries
- More than 10 million motors and pumps produced annually worldwide
- North American companies operating in USA, Canada and Mexico
- Continuous reinvestment in growth and development enables the company to **BE** responsible, **THINK** ahead, and **INNOVATE**.

		Application	Technical data	Sizing
Drainage		Unilift CC Unilift CC is a submersible pump designed for pumping clean, non-aggressive water and slightly dirty (grey) wastewater. Unilift CC can pump down to 0.12" water level and can be used in permanent installations or as a portable pump.	 GR A0682	 TM04 3028 3508
		Unilift KP Unilift KP is a submersible pump designed for pumping clean, non-aggressive water and slightly dirty (grey) wastewater such as domestic effluents from septic and sludge treating systems.	 GR 0111	 TM04 3029 3508
		Unilift AP12 Unilift AP12 is a submersible pump designed for pumping clean, non-aggressive water and slightly dirty (grey) wastewater. The pump can be used as a portable unit.	 TM03 7213	 TM04 3030 3508
Effluent		Unilift AP35 Unilift AP35 is a submersible pump designed for pumping dirty water, untreated waste-water (excluding toilet discharge) and liquids containing fibres from light industry, laundries, etc. with particles up to 1.38".	 GR0115	 TM04 3031 3508
		Unilift AP35B Unilift AP35B is a submersible pump designed for pumping effluents (excluding toilet discharge). The pump is suitable for installation on auto coupling; this allows easy access to the pump for maintenance and other purposes.	 TM03 8260 0907	 TM034 3033 3508
Domestic sewage		Unilift AP50 Unilift AP50 is a submersible pump designed for pumping dirty water, untreated waste-water and liquids containing fibres from light industry, laundries, etc. with particles up to 1.97".	 GR0117	 TM04 3032 3508
		Unilift AP50B Unilift AP50B is a submersible pump designed for pumping effluents. The pump is suitable for installation on auto-coupling allowing easy access to the pump for maintenance and other purposes.	 TM03 8260 0907	 TM04 3034 3508


Performance range

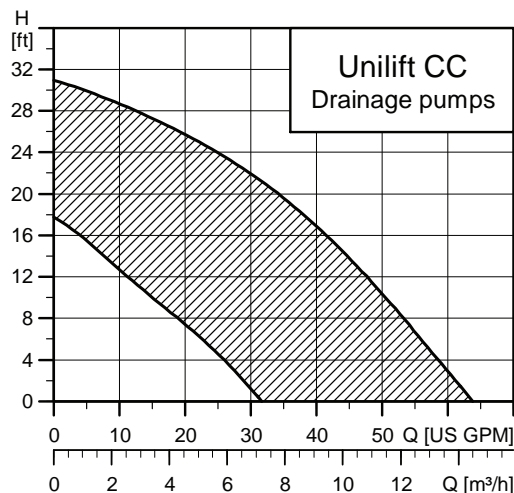


TM04 2264 2208

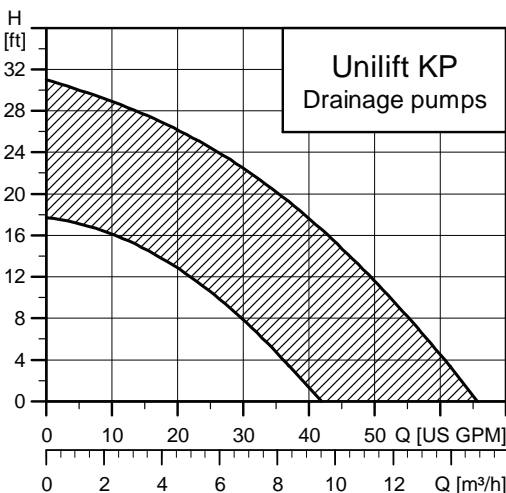


TM04 2408 2508

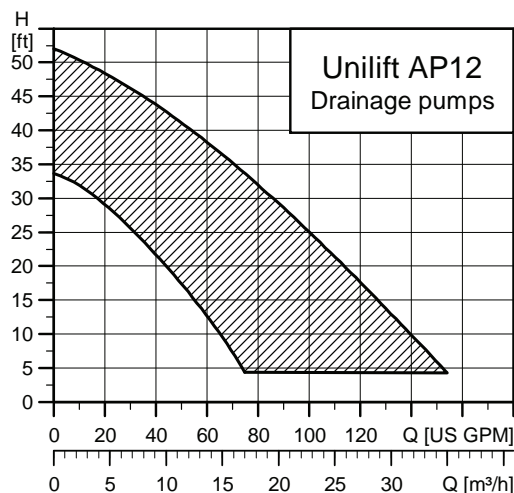

TM04 3004 3508

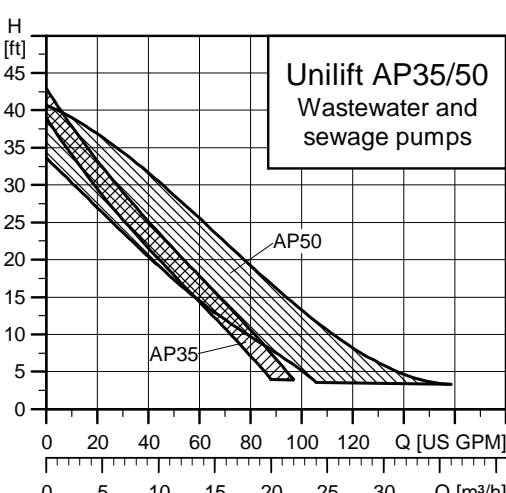

TM04 3000 3508

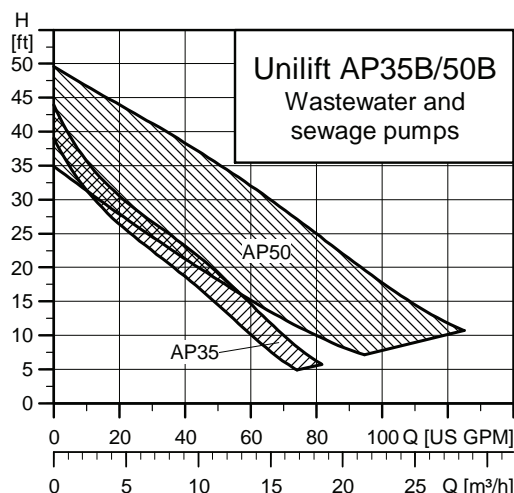

TM04 3003 3508

Applications

The Unilift CC, KP and AP are submersible wastewater pumps suitable for temporary as well as permanent free-standing installation.

The pumps are designed for intermittent operation.

pH values:

- Unilift CC: 4 to 9
- Unilift KP: 4 to 9
- Unilift AP: 4 to 10.

Maximum density: 146.88 ounce/gallon.

Maximum installation depth below water level: 34 feet.

Examples of applications:

Application	Unilift pump type						
	CC	KP	AP12	AP35	AP35B	AP50	AP50B
Max. liquid temperature	104 °F	122 °F	131 °F	131 °F	104 °F	131 °F	104 °F
Max. particle size [mm] / [inch]	10/0.39	10/0.39	12/0.47	35/1.38	35/1.38	50/1.97	50/1.97
Non-permanent, light-duty applications (used as a portable pump)	●	●	○	○	○	○	○
Non-permanent, heavy-duty applications for installers and light industry (used as a portable pump)			●	●	●	●	●
Pumping of:							
Water and rainwater in horticulture	●	●	●				
Water from rivers and lakes	●	●	●	●	●	●	●
Rainwater, drainage water and water from flooding	●	●	●	●	●	●	●
Water for filling/emptying containers, ponds, tanks, etc.	●	●	●	●	●	●	●
Effluents from showers, washing machines and sinks below sewer level	●	●	●	●	●	●	●
Pool water	●	●	●	●	●	●	●
Ditch drainage water	●	●	●	●	●	●	●
Groundwater (lowering applications)	●	●	●	●	●	●	●
Domestic effluents from septic and sludge-treating systems	○	●	●	●	●	●	●
Liquids containing fibres from light industry, laundries, etc.				●	●	●	●
Effluents from viaducts, underpasses, etc.				●	●	●	●
Drainage water from garage sprinkler systems				○	○	○	○
Domestic wastewater with toilet discharge from pipes and water closets below sewer level, outdoor pump installations						●	●
Domestic wastewater with toilet discharge from pipes and water closets below sewer level, indoor pump installations						Not applicable	

● = Recommended pump type

○ = Alternative pump type

Wastewater definitions

Drainage

Raw water, drainage and untreated wastewater containing solids no larger than 0.44" from households, farms and small industry.

Effluent

Dirty water and untreated wastewater (excluding toilet discharge), containing fibres and solids no larger than 1.38" from dewatering systems, domestic wastewater systems and small industry.

Sewage

Untreated wastewater and raw sewage containing fibres, textiles and other solids, including toilet discharge from domestic sewage systems, farms and industry no larger than 1.97".

Pump overview

Pump range Unilift	Free passage [mm] / [inches]	Impeller type	Number of motor poles
CC	10/0.39	Semi-open	2
KP	10/0.39	Semi-open	2
AP12	12/0.47	Semi-open	2
AP35	35/1.38	Vortex	2
AP35B	35/1.38	Vortex	2
AP50	50/1.97	Vortex	2
AP50B	50/1.97	Vortex	2

Type keys

Unilift CC pumps

Example	Unilift	CC	9	A1
Type range				
Type				
Maximum head [m]				
5				
7				
9				
Operation				
A1 = Automatic operation				
M1 = Manual operation				

Unilift KP pumps

Example	Unilift KP	150	A	1
Type range				
Rated motor output, P_2 [W]:				
150				
250				
350				
Level control:				
S =with integrated, electronic sensor (automatic operation)				
A =with float switch (automatic operation)				
M =without level switch (manual operation)				
Motor:				
1 =single-phase				
3 =three-phase				

Unilift AP pumps

Example	Unilift AP	35	B.	50.	08.	A	1	.V
Type range								
Maximum solids size (mm)								
Pump type:								
Blank = AP pump								
B = AP Basic								
Nominal diameter of discharge port								
Power output $P_2/100$ [W]								
Level control:								
A = Automatic operation (with float switch)								
Blank = Manual operation (without float switch)								
Motor:								
1 = Single-phase								
3 = Three-phase								
Impeller:								
V = Vortex impeller								

Construction

Vertical, single-stage, submersible centrifugal pumps with horizontal or vertical discharge port designed for free-standing installation or for installation in collecting tanks.

The pumps are directly connected to an asynchronous submersible motor for 1 x 115 V +6/-10 %, 1 x 230 V +6/-10 %, 60Hz.

Enclosure class: IP68

Insulation class: B or F.

Unilift pumps

Single-phase pumps incorporate thermal overload protection and require no additional motor protection.

Installation

The pumps are suitable for free-standing installation. Pumps for vertical dry tank installation can be installed by means of a stationary stand with suction bend.

Follow current local electrical codes or national electric codes (NEC) for electrical connection of pumps.

Product description



TM03 1358 1805

Fig. 1 Unilift CC

Unilift CC 5, CC 7 and CC 9 pumps are single-stage submersible pumps able to pump down to 0.12" water level. The pumps are designed for pumping rainwater and grey wastewater from places such as

- washing machines, baths, sinks, etc. from low-lying parts of buildings up to sewer level
- cellars or buildings prone to flooding
- draining wells
- collecting wells for surface water with inlets from roof gutters, tunnels, etc.
- swimming pools, ponds or fountains.

The pumps are suitable for permanent installation or they can be used as portable pumps. They are available in two versions:

- M for manual operation
- A for automatic operation.

The pumps allow free passage of particles up to 0.39".

Approvals



Pumped liquids

The pumps are suitable for these liquids:

- clean, non-aggressive water
- slightly dirty (grey) wastewater.

The pumps are **not** suitable for these liquids:

- liquids containing long fibres
- inflammable liquids (oil, petrol, etc.)
- aggressive liquids.

If the pump has been used for other liquids than clean water, it should be flushed through with clean water immediately after use.

Components included

The pump is supplied with an adapter and a non-return valve.

The adapter has 0.75", 1" and 1.25" NPT external threads. It must be cut to fit the discharge pipe.

The non-return valve can be fitted in the adapter to prevent backflow through the pump when it stops.

Pump sleeve and housing

The sleeve is made of composite material cast in one piece with a 1.25" NPT external pipe thread (G) discharge connection. A slot on the handle holds the float switch cable.

The main cable and flow switch cable are introduced into the sleeve through hermetically sealed cable entries.

The suction strainer is fitted to the sleeve by giving it a light push and can be removed easily by means of a screwdriver or similar tool. The water enters the pump through the holes of the suction strainer preventing the passage of large solids. The large holes also ensure a slow flow into the pump.

Suction to low water level is obtained by removing the strainer.

Motor

The motor is a single-phase, asynchronous, dry-rotor motor. The axial rotor position is secured by means of a ball bearing. The motor is cooled by the pumped liquid around the motor.

	Insulation class	Enclosure class
Unilift CC 5	B (115V) F (230V)	IP68
Unilift CC 7	B (115V) F (230V)	IP68
Unilift CC 9	B	IP68

The motor incorporates automatic overload protection cutting out the motor in case of overload. When cooled to normal temperature, the motor will restart automatically.

Materials


Component	Material	DIN W.-Nr.
Motor sleeve	PP 15 GF	
Pump sleeve	PP 15 GF	
Impeller	PPOm 20 GF	
Suction strainer	Stainless steel class A2	1.4301
V-ring	NBR 50	
O-rings	NBR 70	
Cable	SJTW-A 3AWG18	

Selection

The flow velocity through the discharge pipe must be minimum 2.3 ft/s to ensure self-cleaning.

Example: Schedule 40 PVC discharge pipe with an inner diameter of 0.824" requires a minimum flow velocity of approximately 4 gpm.

The overview below shows the maximum lengths of combined vertical and horizontal Schedule 40 PVC discharge pipes.

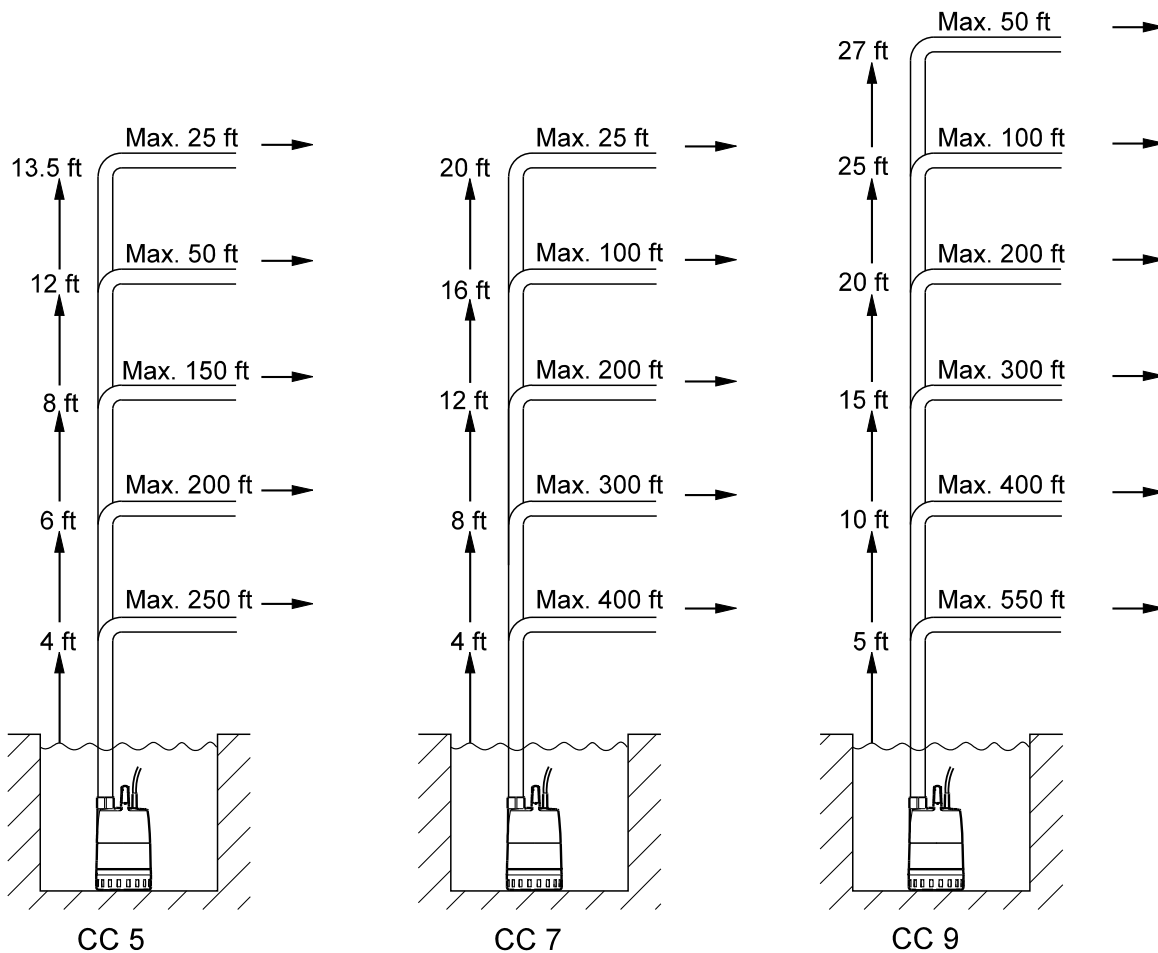


TM04 3041 3508

The overview is only intended as a guide. Grundfos is not liable for installations not complying with the overview.

Note: If a non-return valve is used, the pressure drop in the valve will be approximately 0.6 ft head which must be subtracted from the vertical pipe lengths.

The vertical height of the discharge pipe should be measured from the pump stop level.

Performance curves

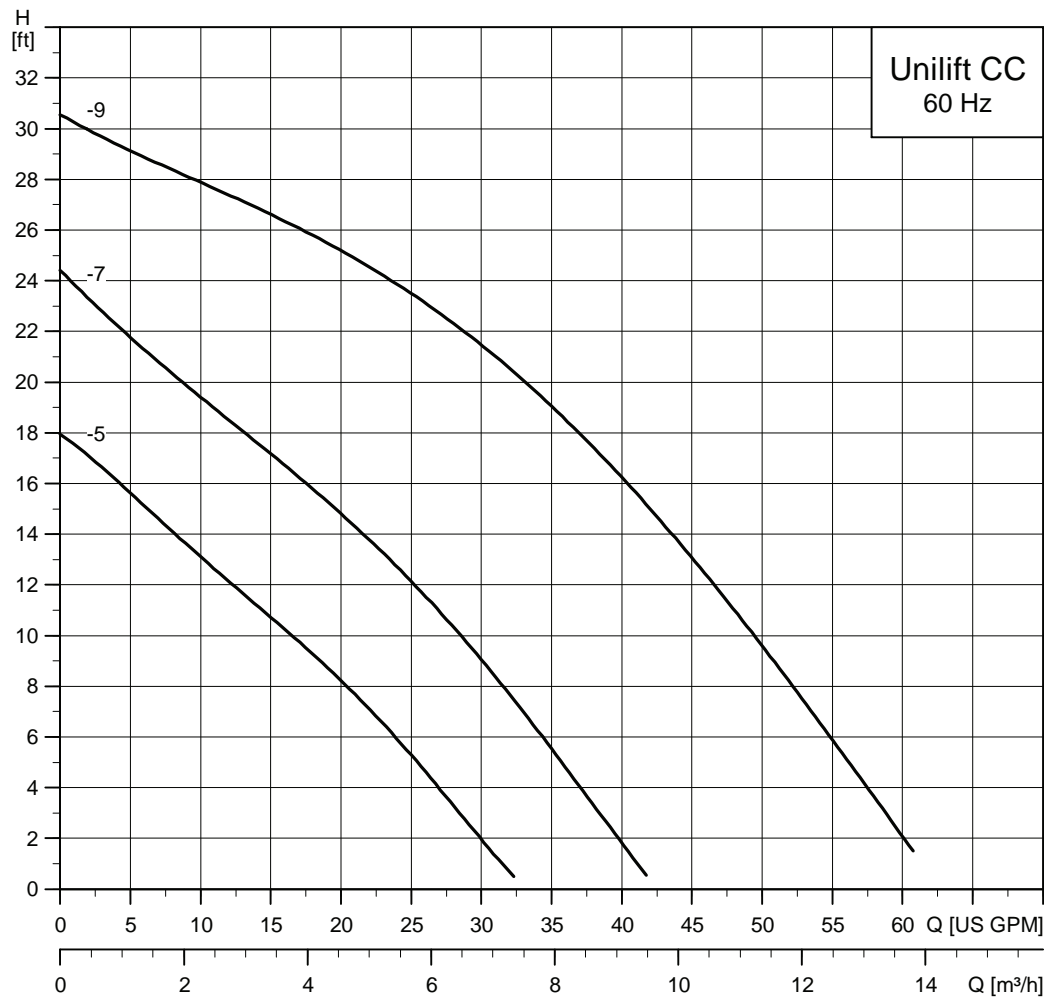

TM04 2257 2208

Operating conditions

Liquid temperature

32 °F to 104 °F.

However, at intervals of at least 30 minutes, the pump is allowed to run at maximum +158 °F for periods not exceeding two minutes.

Installation

The pump can be used in the vertical position as well as in the tilted or horizontal position with the discharge port as the highest point of the pump. The suction strainer must be covered by the pumped liquid.

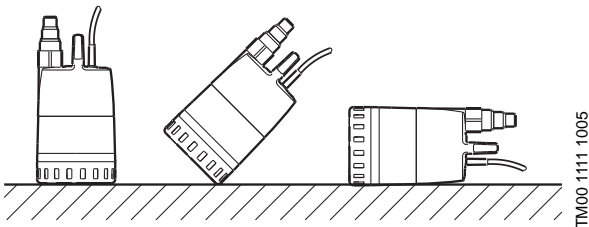


Fig. 2 Pump positions

Installation depth

Maximum 32 ft below the water surface.

Adjustment of cable length for float switch

The difference in level between start and stop can be adjusted by changing the free cable length between the float switch and the pump handle.

- Increasing the free cable length results in fewer starts/stops and a large difference in level.
- Reducing the free cable length results in more frequent starts/stops and a small difference in level.

In order for the float switch to start and stop the pump, the free cable length must be minimum 3.94" and maximum 7.87".





Fig. 3 Start-stop levels, Unilift CC

Pump type	Cable length (L) min. 3.94"		Cable length (L) max. 7.87"	
	Start [inches]	Stop [inches]	Start [inches]	Stop [inches]
Unilift CC 5	13.78	4.53	15.75	2.2
Unilift CC 7	13.78	4.53	15.75	2.2
Unilift CC 9	15.16	5.9	17	3.5

Technical data

Product no.	Pump type	Voltage [V]	P2 [hp]	I _n [A]	I _{start} [A]	Dimensions [inches]					Weight [lbs]	Cable length and plug
						H	B	H1	B1	B2		
96780906	Unilift CC 5 - M1	1 x 115	0.1	2.1	3.2	20.47	15.75	12.01	6.3	1.04	9.6	8 feet with Nema 5
96781199	Unilift CC 5 - A1	1 x 115	0.1	2.1	3.2	20.47	15.75	12.01	6.3	1.04	9.6	8 feet with Nema 5
96781212	Unilift CC 7 - M1	1 x 115	0.2	2.8	5.6	22.44	19.69	13.39	6.3	1.04	10.1	8 feet with Nema 5
96781220	Unilift CC 7 - A1	1 x 115	0.2	2.8	5.6	20.47	15.75	12.01	6.3	1.04	10.1	8 feet with Nema 5
96781221	Unilift CC 9 - M1	1 x 115	0.6	5.6	16.2	20.47	15.75	12.01	6.3	1.04	14.3	8 feet with Nema 5
96781223	Unilift CC 9 - A1	1 x 115	0.6	5.6	16.2	22.44	19.69	13.39	6.3	1.04	14.3	8 feet with Nema 5
96781224	Unilift CC 5 - M1	1 x 230	0.15	1	1.6	20.47	15.75	12.01	6.3	1.04	9.6	8 feet with Nema 6
96781225	Unilift CC 5 - A1	1 x 230	0.15	1	1.6	20.47	15.75	12.01	6.3	1.04	9.6	8 feet with Nema 6
96781229	Unilift CC 7 - M1	1 x 230	0.2	1.2	2.5	22.44	19.69	13.39	6.3	1.04	10.1	8 feet with Nema 6
96781230	Unilift CC 7 - A1	1 x 230	0.2	1.2	2.5	20.47	15.75	12.01	6.3	1.04	10.1	8 feet with Nema 6
96781231	Unilift CC 9 - M1	1 x 230	0.6	2.5	7.3	20.47	15.75	12.01	6.3	1.04	14.3	8 feet with Nema 6
96781233	Unilift CC 9 - A1	1 x 230	0.6	2.5	7.3	22.44	19.69	13.39	6.3	1.04	14.3	8 feet with Nema 6

With float switch

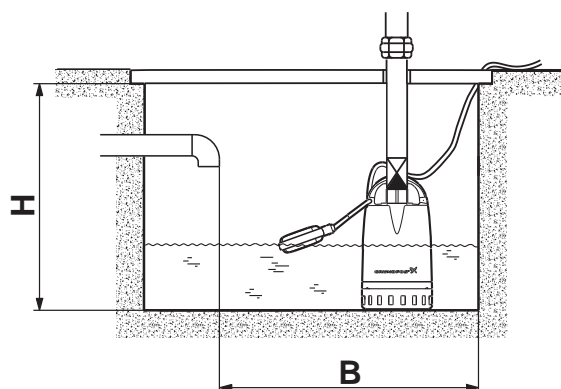


TM03 1122 1105

Fig. 4 Minimum well dimensions, Unilift CC

If the pump is installed in a collecting well, the minimum dimensions of the well should be as shown above to ensure free movability of the float switch.

Without float switch

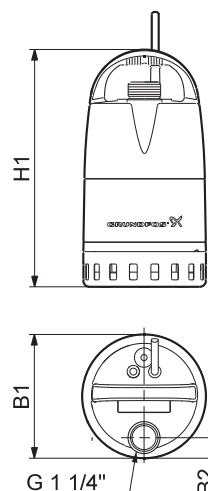

TM03 1357 1805

Fig. 5 Pump dimensions

The space required corresponds to the physical dimensions of the pump.

Product description



G0111

Fig. 6 Unilift KP

The Unilift KP pump is designed for liquid transfer and drainage of clean or slightly dirty wastewater with the pump completely or partly submerged in the liquid.

The pump is suitable for these applications:

- drainage of flooded cellars or buildings
- pumping of domestic wastewater without toilet waste
- emptying of pools, tanks and vessels
- pumping within agriculture, the dairy industry, horticulture and the process industry.

Approvals



Pumped liquids

The pumps are suitable for these liquids:

- clean, non-aggressive water
- slightly dirty (grey) wastewater.

If the pump has been used for other liquids than clean water, it should be flushed through with clean water immediately after use. The open-impeller construction ensures a free passage of solids up to a diameter of 0.39".

Operating conditions

Installation depth: Max. 30 ft below liquid level

Min. liquid temperature: 32 °F

Max. liquid temperature at continuous operation: 122 °F

During continuous pumping, the suction strainer must always be completely covered by the liquid.

Max. liquid temperature: 158 °F for periods not exceeding two minutes at intervals of at least 30 minutes.

Discharge port

Unilift KP 150, KP 250 and KP 350: 1.25" NPT.

Construction

Single-stage, submersible, stainless steel, drainage pump in a robust design with upward-pointing discharge port placed on top of the pump.

The water enters the pump through the holes of the suction strainer, preventing the passage of large solids. The sturdy impeller has single-curved vanes with bevelled front edges preventing fibres from jamming the impeller. The guide vanes in the pump housing guide the liquid, lifting sand grains into the liquid flow, thus preventing blocking by sand.

The pump sleeve is made in one piece. The mains cable enters through a vulcanized and water-tight plug, which is secured to the socket of the hermetically sealed stator housing.

Motor

The motor is a single- or three-phase asynchronous canned motor with liquid-filled rotor chamber and water-lubricated bearings. The motor is cooled by the pumped liquid around the motor.

Enclosure class: IP68

Insulation class: F.

The motor incorporates automatic overload protection which cuts out the motor in case of overload. When cooled to normal temperature, the motor restarts automatically.

Materials


Component	Material	DIN W.-Nr.	AISI
Pump sleeve	Stainless steel	1.4301	304
Pump housing	Stainless steel	1.4301	304
Suction strainer	Stainless steel	1.4301	304
Impeller	Stainless steel	1.4301	304
Shaft	Stainless steel	1.4057	431
Stator housing	Stainless steel	1.4301	304
Guide vanes	Stainless steel	1.4301	304
Bearings	Carbon		
O-rings, Seal rings	NBR		
Cables	16 AWG 3/C SJOW 90C		

Selection

The flow velocity through the discharge pipe must be minimum 2.3 ft/s to ensure self-cleaning.

Example: Schedule 40 PVC discharge pipe with an inner diameter of 1.38" requires a minimum flow velocity of approximately 12 gpm.

The overview below shows the maximum lengths of combined vertical and horizontal Schedule 40 PVC discharge pipes.

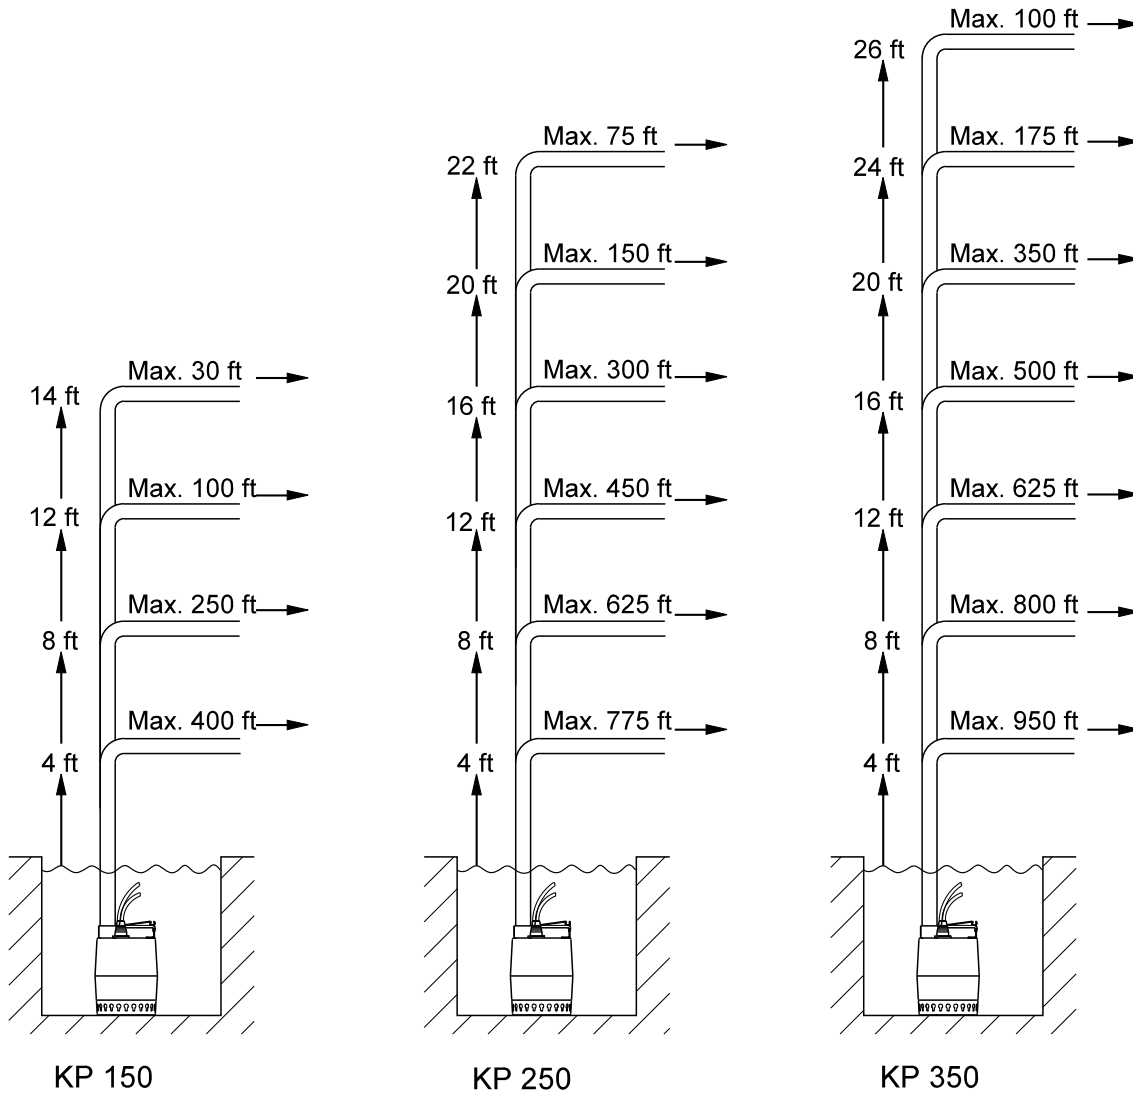


TM04 3040 3508

The overview is only intended as a guide. Grundfos is not liable for installations not complying with the overview.

Note: If a non-return valve is used, the pressure drop in the valve will be approximately 0.6 ft head which must be subtracted from the vertical pipe lengths.

The vertical height of the discharge pipe should be measured from the pump stop level.

Performance curves

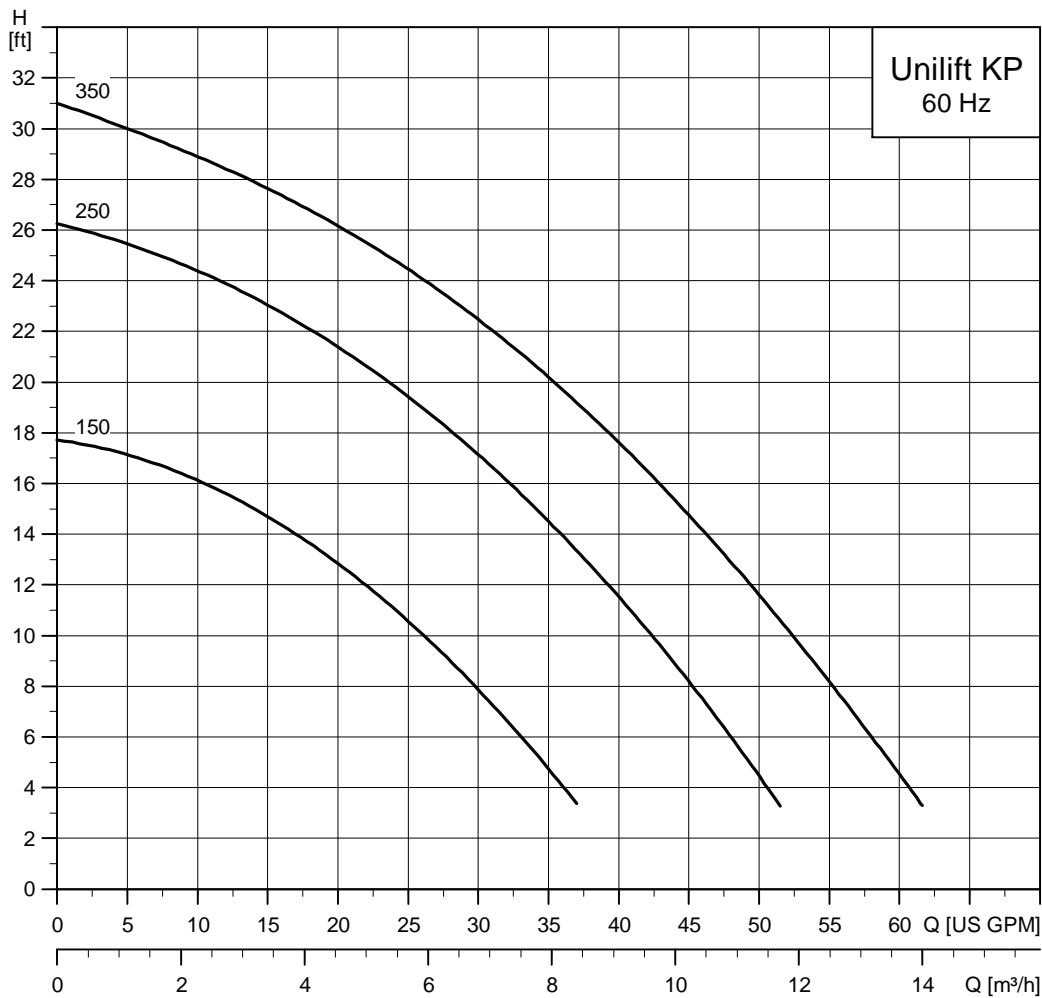

TM04 2409 2508

Installation

Pumps without float switch can be used in vertical position with the discharge port pointing upwards or in horizontal or tilted position with the discharge port as the highest point of the pump.

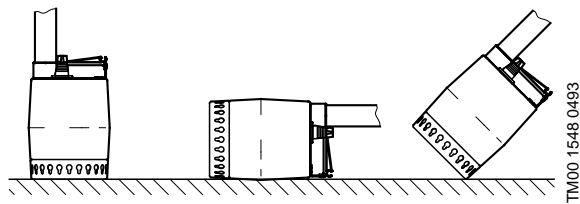


Fig. 7 Pump positions

Adjustment of cable length for float switch

A clamp on the pump handle holds the float switch cable. The difference in level between start and stop can be adjusted by changing the free cable length between the pump handle and the float switch.




Fig. 8 Start-stop level, Unilift KP


The start/stop level varies according to the cable length.

	Cable length Min. 2.5"		Cable length Max. 6"	
	Start	Stop	Start	Stop
Unilift KP 150	11.5"	5.5"	12.5"	3.5"
Unilift KP 250				
Unilift KP 350	12"	6"	13	4"

Technical data

Product no.	Pump type	Voltage [V]	P2 [hp]	I _n [A]	I _{Start} [A]	Dimensions [inches]			Weight [lbs]	Cable length and plug
						H	B1	B2		
96847184	KP 150 A-1	1x115	0.25	2.9	8.7	8.86	5.87	1.22	14.33	10 feet with Nema 5
96847185	KP 150 A-1	1x115	0.25	2.9	8.7	8.86	5.87	1.22	14.33	25 feet with Nema 5
011DC001	KP 150 M-1	1x115	0.25	2.9	8.7	8.86	5.87	1.22	14.33	10 feet with Nema 5
011DC201	KP 150 M-1	1x115	0.25	2.9	8.7	8.86	5.87	1.22	14.33	25 feet with Nema 5
96847186	KP 250 A-1	1x115	0.3	4.9	14.5	8.86	5.87	1.22	15.43	10 feet with Nema 5
96847425	KP 250 A-1	1x115	0.3	4.9	14.5	8.86	5.87	1.22	15.43	25 feet with Nema 5
012DC001	KP 250 M-1	1x115	0.3	4.9	14.5	8.86	5.87	1.22	15.43	10 feet with Nema 5
012DC201	KP 250 M-1	1x115	0.3	4.9	14.5	8.86	5.87	1.22	15.43	25 feet with Nema 5
96847640	KP 350 A-1	1x115	0.5	7.5	21.4	9.25	5.87	1.22	17.64	10 feet with Nema 5
96847798	KP 350 A-1	1x115	0.5	7.5	21.4	9.25	5.87	1.22	17.64	25 feet with Nema 5
013DC001	KP 350 M-1	1x115	0.5	7.5	21.4	9.25	5.87	1.22	17.64	10 feet with Nema 5
013DC201	KP 350 M-1	1x115	0.5	7.5	21.4	9.25	5.87	1.22	17.64	25 feet with Nema 5

With float switch

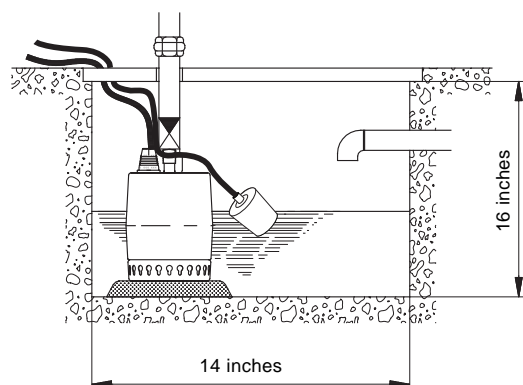

Well dimensions with float switch

Fig. 9 Minimum well dimensions, Unilift KP

If the pump is installed in a collecting well, the minimum dimensions of the well should be as shown above to ensure free movability of the float switch.

The space required corresponds to the physical dimensions of the pump.

Without float switch

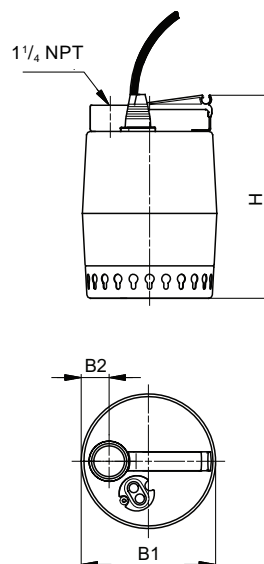


Fig. 10 Pump dimensions

TM03 4330 2006

TM04 31874 4009

Product description



Gr0113

Fig. 11 Unilift AP12

The Unilift AP12 pump is a single-stage submersible pump designed for pumping drainage water.

The pump is suitable for these applications:

- groundwater lowering
- pumping in drainage collecting wells
- pumping in surface water collecting wells with inflow from roof gutters, shafts, tunnels, etc.
- emptying ponds, tanks, etc.

Maximum particle size: 0.44".

Liquid temperature range: 32 °F to 131 °F.

Approvals



Operation

The pump can be used for automatic as well as manual operation and can be installed in a permanent installation or used as a portable pump.

To enable automatic operation the pump can be fitted with a float switch or it can be connected to separate level switch and control box for automatic on/off operation.

Pump sleeve and housing

The stainless steel pump sleeve is made in one piece and equipped with an insulated carrying handle. The suction strainer is clipped on to the pump housing for easy removal in connection with maintenance. The strainer prevents the passage of large solids and ensures a slow flow into the pump. As a result, most impurities are prevented from entering the pump.

The stainless steel pump housing is fitted with an internal riser pipe ensuring high efficiency.

The riser pipe has a number of holes enabling efficient cooling of the motor during operation. The cable entry is of the socket and plug connection type for quick and easy dismantling.

Discharge port

All Unilift AP12 pumps have a threaded vertical discharge port.

Unilift AP12.40: 1.5" NPT.


Unilift AP12.50: 2" NPT.

Shaft and bearings

The stainless steel shaft rotates in maintenance-free prelubricated ball bearings.

Impeller

The stainless steel impeller is a semi-open impeller with L-shaped blades and a clearance of 0.44". The blades are curved backwards to reduce any harmful effect from solid particles and to minimise power consumption.



TM00 5477 0895

Fig. 12 Impeller, Unilift AP12

Shaft seal

The shaft seal is a combination of a mechanical bellows shaft seal and a lip seal with 2 fl.oz. oil between. Seal faces are made of silicone carbide.

Motor

The motor is a single- or three-phase asynchronous dry-rotor motor.

Enclosure class: IP68

Insulation class: F (311 °F)

Cable type: SJOW-A.

Single-phase motors have built-in thermal protection.

Adjustment of cable length for float switch

The difference in level between start and stop can be adjusted by changing the free cable length between the float switch and the pump handle.

- Increasing the free cable length will result in fewer starts/stops and a large difference in level.
- Reducing the free cable length will result in more frequent starts/stops and a small difference in level.

In order for the float switch to start and stop the pump, the free cable length must be min. 4". When adjusting the free cable end, make sure that the suction strainer is always covered by water.

Materials


Component	Material	DIN W.-Nr.	AISI
Pump housing	Stainless steel	1.4301	304
Riser pipe	Stainless steel	1.4301	304
Impeller	Stainless steel	1.4301	304
Pump sleeve	Stainless steel	1.4401	316
Pump shaft - wet end	Stainless steel	1.4301	304
Bearings	Heavy-duty prelubricated ball bearings		
O-rings	NBR rubber		
Screws	Stainless steel	1.4301	304
Oil	Shell Ondina 15, non-toxic		

Selection

The flow velocity through the discharge pipe must be minimum 2.3 ft/s to ensure self-cleaning.

Example: Schedule 40 PVC discharge pipe with an inner diameter of 1.61" requires a minimum flow velocity of approximately 15 gpm (AP12.40).

Schedule 40 PVC discharge pipe with an inner diameter of 2.067" requires a minimum flow velocity of approximately 24 gpm (AP12.50).

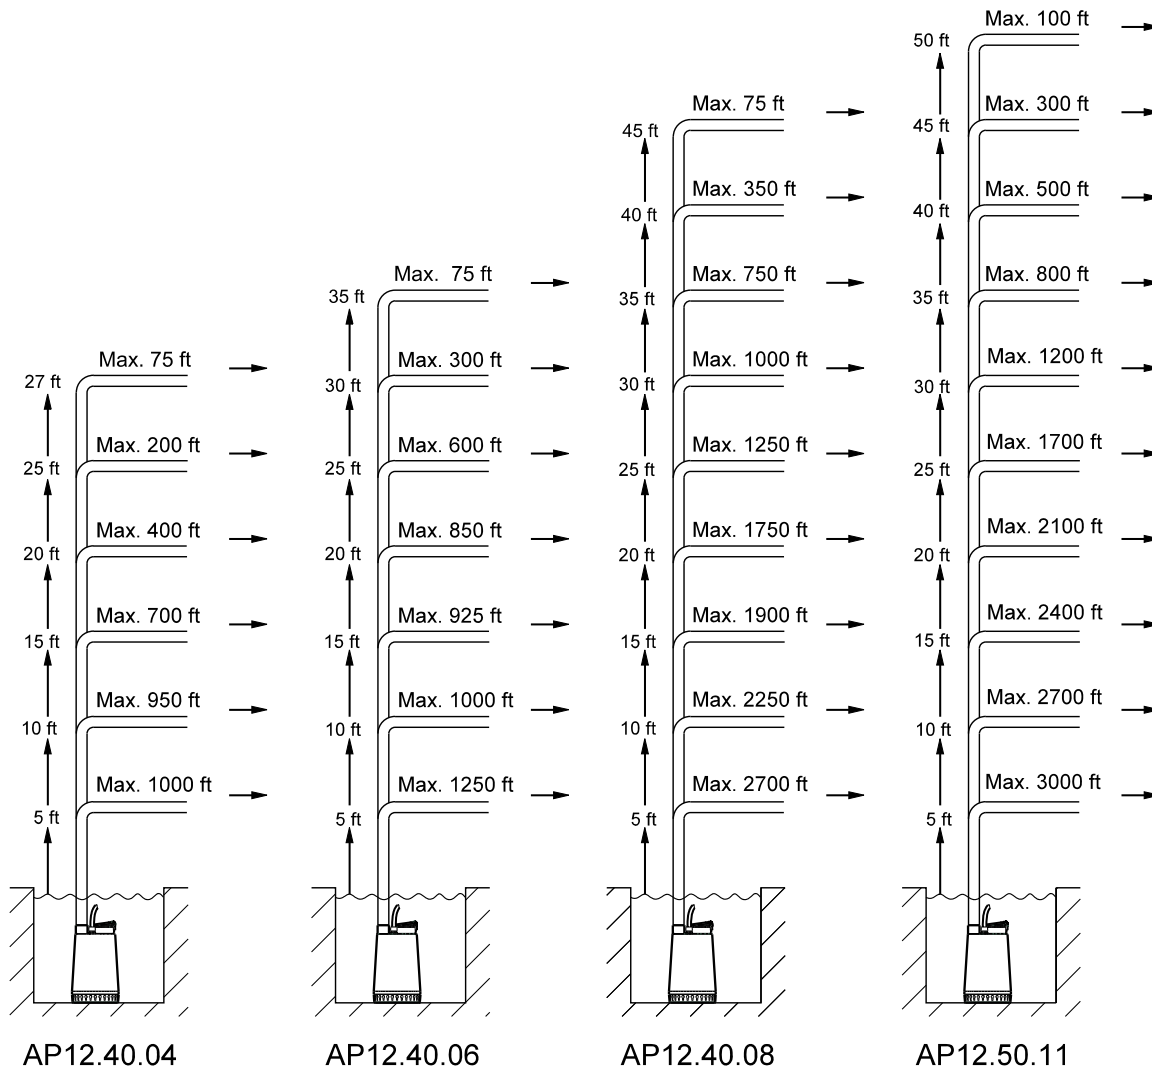


TM04 3035 3508

The overview is only intended as a guide. Grundfos is not liable for installations not complying with the overview.

Note: If a non-return valve is used, the pressure drop in the valve is approximately 0.6 ft head which must be subtracted from the vertical pipe lengths.

The vertical height of the discharge pipe should be measured from the pump stop level.

Performance curves

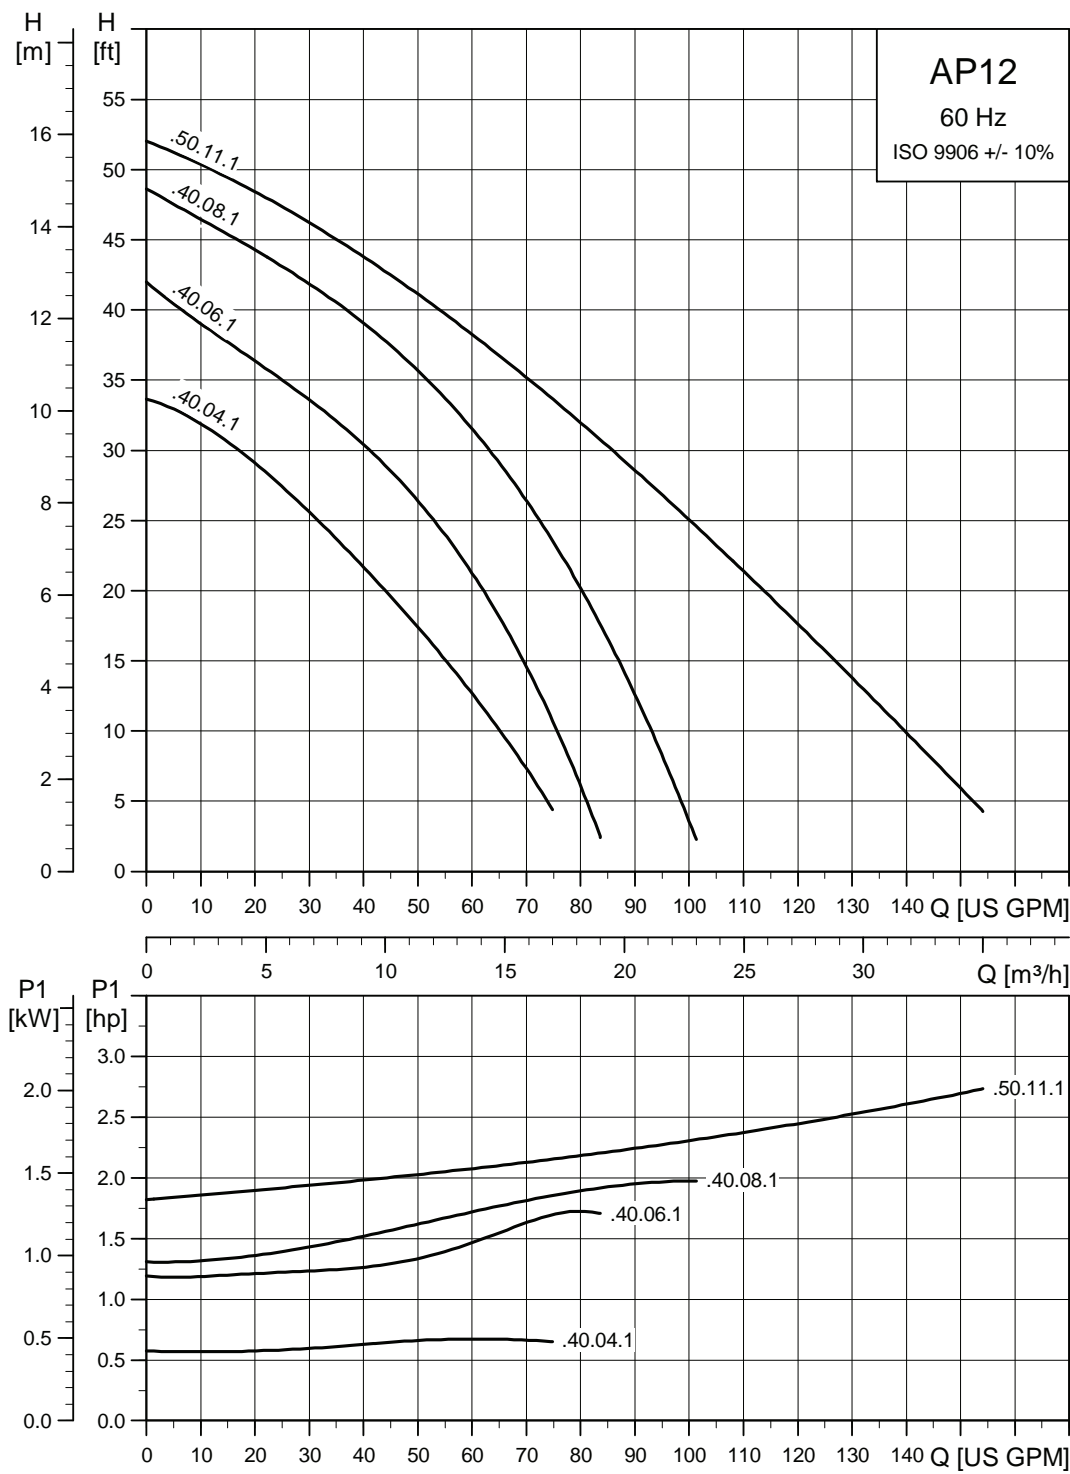


TM04 3001 3508

Technical data

Product no.	Pump type	Voltage [V]	P2 [hp]	I _n [A]	I _{Start} [A]	Dimensions [inches]			Weight [lbs]	Cable length and plug
						A	B	S		
96023926	Unilift AP12.40.04/1.1	1 x 115	0.5	8	24	12.6	8.5	1.5 NPT	23.1	10 feet with Nema 5
96011036	Unilift AP12.40.04/1.1	1 x 115	0.5	8	24	12.6	8.5	1.5 NPT	24.3	25 feet with Nema 5
96847167	Unilift AP12.40.04/1A.1	1 x 115	0.5	8	24	12.6	8.5	1.5 NPT	23.1	10 feet with Nema 5
96847166	Unilift AP12.40.04/1A.1	1 x 115	0.5	8	24	12.6	8.5	1.5 NPT	24.3	25 feet with Nema 5
96010656	Unilift AP12.40.06/1.1	1 x 230	0.8	4.4	21	12.6	8.5	1.5 NPT	26.5	10 feet / No Plug
96010658	Unilift AP12.40.06/1.1	1 x 230	0.8	4.4	21	12.6	8.5	1.5 NPT	24.9	25 feet / No Plug
96847169	Unilift AP12.40.06/1A.1	1 x 230	0.8	4.4	21	12.6	8.5	1.5 NPT	26.5	10 feet / No Plug
96847168	Unilift AP12.40.06/1A.1	1 x 230	0.8	4.4	21	12.6	8.5	1.5 NPT	24.9	25 feet / No Plug
96010662	Unilift AP12.40.08/1.1	1 x 230	1.1	5.8	29	12.6	8.5	1.5 NPT	29.1	10 feet / No Plug
96010664	Unilift AP12.40.08/1.1	1 x 230	1.1	5.8	29	12.6	8.5	1.5 NPT	30.9	25 feet / No Plug
96847170	Unilift AP12.40.08/1A.1	1 x 230	1.1	5.8	29	12.6	8.5	1.5 NPT	29.1	10 feet / No Plug
96847171	Unilift AP12.40.08/1A.1	1 x 230	1.1	5.8	29	12.6	8.5	1.5 NPT	30.9	25 feet / No Plug
96010680	Unilift AP12.50.11/1.1	1 x 230	1.5	9.0	35	12.6	8.5	1.5 NPT	32.8	10 feet / No Plug
96010683	Unilift AP12.50.11/1.1	1 x 230	1.5	9.0	35	12.6	8.5	1.5 NPT	36.4	25 feet / No Plug
96847173	Unilift AP12.50.11/1A.1	1 x 230	1.5	9.0	35	12.6	8.5	1.5 NPT	32.8	10 feet / No Plug
96847172	Unilift AP12.50.11/1A.1	1 x 230	1.5	9.0	35	12.6	8.5	1.5 NPT	36.4	25 feet / No Plug

With float switch

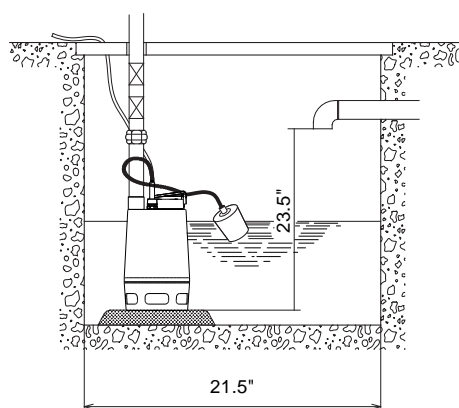


Well dimensions with float switch

TTM04 3283 4009

Fig. 13 Minimum well dimensions, Unilift AP12

If the pump is installed in a collecting well, the minimum dimensions of the well should be as shown above to ensure free movability of the float switch.

Without float switch

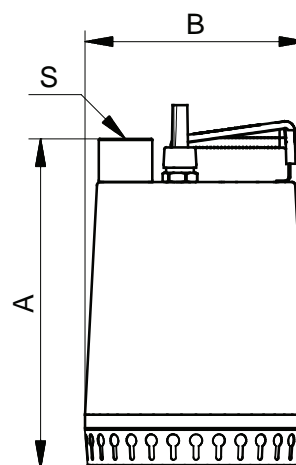

TM00 5523 0995

Fig. 14 Pump dimensions

The space required corresponds to the physical dimensions of the pump.

Product description



GR115

Fig. 15 Unilift AP35

The Unilift AP35 pump is a single-stage, submersible pump designed for pumping drainage water and effluent. The pump is suitable for these applications:

- groundwater lowering
- pumping in drainage collecting tanks
- pumping in surface water collecting tanks with in-flow from roof gutters, shafts, tunnels, etc.
- emptying of ponds, tanks, etc.
- pumping of fibre-containing wastewater from laundries and industries
- pumping of domestic wastewater without discharge from water closets.

Liquid temperature range: 32 °F to 131 °F.

Approvals



Operation

The pump can be used for automatic as well as manual operation and can be installed in a permanent installation or used as a portable pump.

To enable automatic operation the pump can be fitted with a float switch or it can be connected to separate level switch and control box for automatic on/off operation.

Pump sleeve and housing

The stainless steel pump sleeve is made in one piece and equipped with an insulated carrying handle.

The suction strainer is clipped on to the pump housing for easy removal in connection with maintenance. The strainer prevents the passage of large solids and ensures a slow flow into the pump.

The stainless steel pump housing is fitted with an internal riser pipe ensuring high efficiency. The riser pipe has a number of holes enabling efficient cooling of the motor during operation. The cable entry is of the socket and plug connection type, allowing for quick and easy dismantling.

Discharge port


All Unilift AP35 pumps have a threaded 1.5 NPT vertical discharge port.

Shaft and bearings

The stainless steel shaft rotates in maintenance-free prelubricated ball bearings.

Impeller

The stainless steel impeller is a vortex impeller with L-shaped blades and a clearance of 1.38" in the pump housing. The blades are curved backwards to reduce any harmful effect from solid particles and to minimise power consumption. The impeller has a protective cap to prevent the deposit of long-fibred material.



TM00 5478 0895

Fig. 16 Impeller, Unilift AP35

Shaft seal

The shaft seal is a combination of a mechanical, bellows shaft seal and a lip seal with 2 fl.oz. oil between. Seal faces are made of silicone carbide.

Motor cable

The motor is a single- or three-phase asynchronous dry-rotor motor.

Enclosure class: IP68
Insulation class: F (311 °F)
Cable typea: SJOW-A.

Single-phase motors have built-in thermal protection.

Adjustment of cable length for float switch

The difference in level between start and stop can be adjusted by changing the free cable length between the float switch and the pump handle.

- Increasing the free cable length will result in fewer starts/stops and a large difference in level.
- Reducing the free cable length will result in more frequent starts/stops and a small difference in level.

In order for the float switch to start and stop the pump, the free cable length must be min. 4". When adjusting the free cable end, make sure that the suction strainer is always covered by water.

Materials


Component	Materials	DIN W.-Nr.	AISI
Pump housing	Stainless steel	1.4301	304
Riser pipe	Stainless steel	1.4301	304
Impeller	Stainless steel	1.4301	304
Pump sleeve	Stainless steel	1.4401	316
Pump shaft - wet end	Stainless steel	1.4301	304
Bearings	Heavy-duty prelubricated ball bearings		
O-rings	NBR rubber		
Screws	Stainless steel	1.4301	304
Cables	Neoprene		
Oil	Shell Ondina 15, non-toxic		

Selection

The flow velocity through the discharge pipe must be minimum 2.3 ft/s to ensure self-cleaning.

Example: Schedule 40 PVC discharge pipe with an inner diameter of 1.61" requires a minimum flow velocity of approximately 15 gpm.

The overview below shows the maximum lengths of combined vertical and horizontal Schedule 40 PVC discharge pipes.

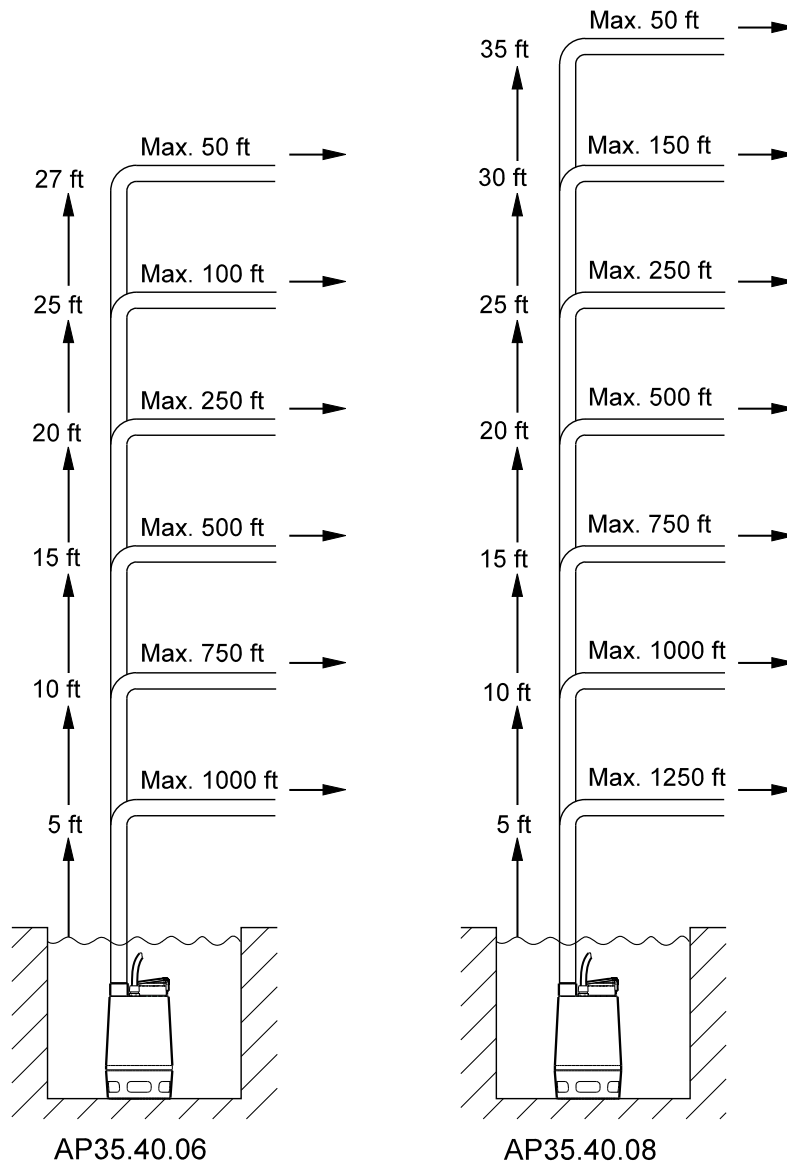


TM04 3036 3508

The overview is only intended as a guide. Grundfos is not liable for installations not complying with the overview.

Note: If a non-return valve is used, the pressure drop in the valve is approximately 0.6 ft head which must be subtracted from the vertical pipe lengths.

The vertical height of the discharge pipe should be measured from the pump stop level.

Performance curve

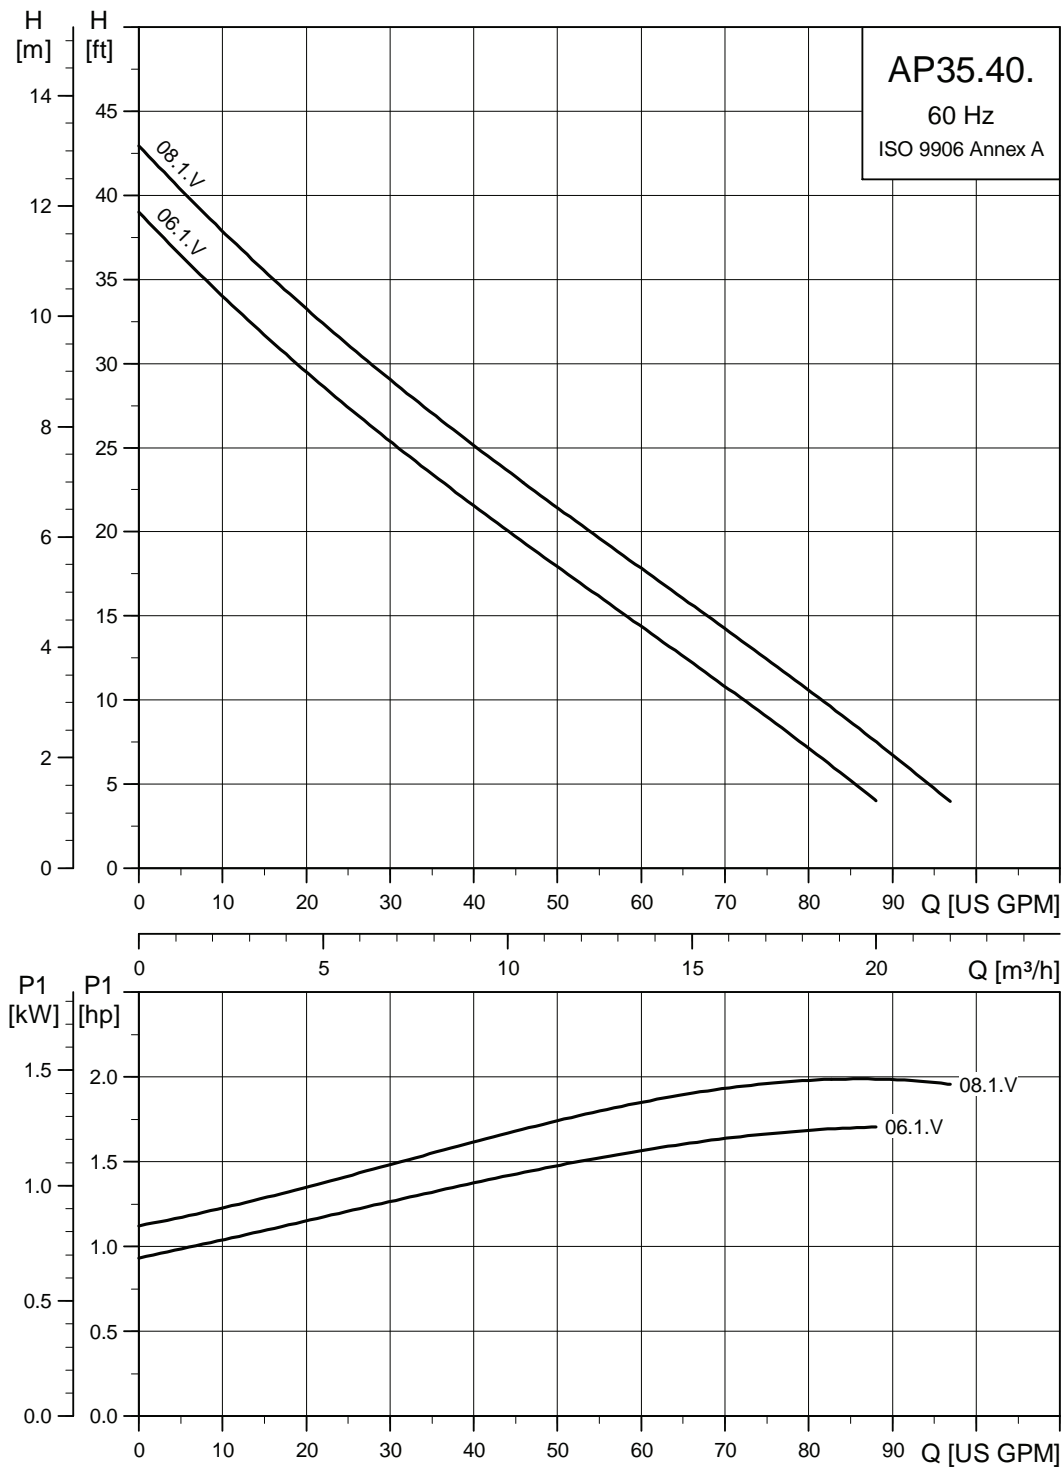

TM04 2999 3508

Technical data

Product no.	Pump type	Voltage [V]	P2 [hp]	I _n [A]	I _{Start} [A]	Dimensions [inches]			Weight [lbs]	Cable length and plug
						A	B	S		
96010668	AP35.40.06.1.V	1 x 230	0.8	3.9	21	14.8	8.5	1.5 NPT	26.7	10 feet / No Plug
96010670	AP35.40.06.1.V	1 x 230	0.8	3.9	21	14.8	8.5	1.5 NPT	26.7	25 feet / No Plug
96847176	AP35.40.06.A.1.V	1 x 230	0.8	3.9	21	14.8	8.5	1.5 NPT	26.7	10 feet / No Plug
96847175	AP35.40.06.A.1.V	1 x 230	0.8	3.9	21	14.8	8.5	1.5 NPT	26.7	25 feet / No Plug
96010674	AP35.40.08.1.V	1 x 230	1.1	5.3	29	16.14	8.5	1.5 NPT	28.0	10 feet / No Plug
96010676	AP35.40.08.1.V	1 x 230	1.1	5.3	29	16.14	8.5	1.5 NPT	28.0	25 feet / No Plug
96847178	AP35.40.08.A.1.V	1 x 230	1.1	5.3	29	16.14	8.5	1.5 NPT	28.0	10 feet / No Plug
96847179	AP35.40.08.A.1.V	1 x 230	1.1	5.3	29	16.14	8.5	1.5 NPT	28.0	25 feet / No Plug

With float switch

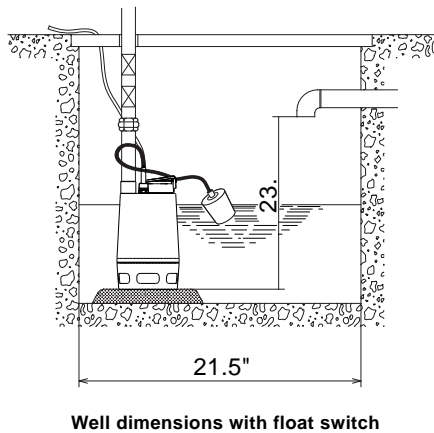


Fig. 17 Minimum well dimensions, Unilift AP35

If the pump is installed in a collecting well, the minimum dimensions of the well should be as shown above to ensure free movability of the float switch.

The space required corresponds to the physical dimensions of the pump.

Without float switch

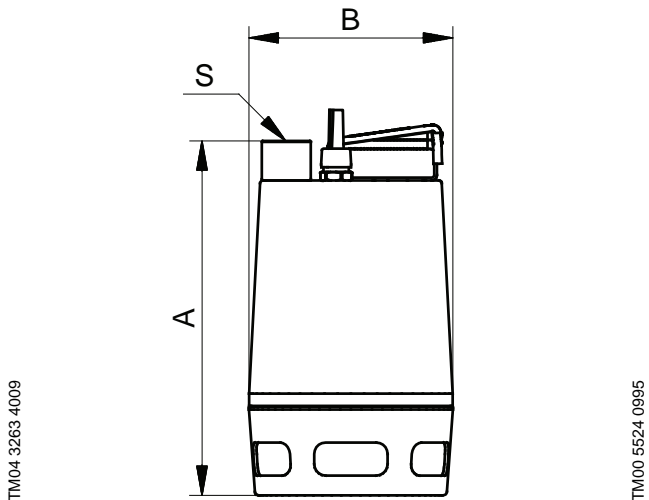


Fig. 18 Pump dimensions

Product description



TM03 8260 0907

Fig. 19 Unilift AP35B

The Unilift AP35B pump is a single-stage submersible pump designed for pumping effluent.

The pump is suitable for these applications:

- groundwater lowering
- pumping in drainage collecting tanks
- pumping in surface water collecting tanks with in-flow from roof gutters, shafts, tunnels, etc.
- emptying of ponds, tanks, etc.
- pumping of fibre-containing effluent from laundries and industries
- pumping of domestic effluent from septic tanks and sludge treating systems
- pumping of domestic effluent without discharge from water closets.

Liquid temperature range: 32 °C to 104 °F.

Approvals



Operation

The pump can be used for automatic as well as manual operation and can be installed in a permanent installation or used as a portable pump.

To enable automatic operation the pump can be fitted with a float switch or it can be connected to separate level switch and control box for automatic on/off operation.

Pump housing

Pump housing with an outstanding design for submersible wastewater pumps, resulting in a high head.

The pump housing is made of a steel tube with a smooth surface and a hydraulically correct shape ensuring free passage of particles.

Ring stand, pump inlet and pump housing are fastened to the motor by means of four springs enabling quick and easy dismantling.

Discharge port


All Unilift AP35B pumps have a threaded 2" NPT horizontal discharge port.

Shaft and bearings

The stainless steel shaft rotates in maintenance-free prelubricated ball bearings.

Impeller

The stainless steel impeller is a vortex impeller with L-shaped blades and a clearance of 1.38" in the pump housing. The blades are curved backwards to reduce any harmful effect from solid particles and to minimise power consumption. The impeller has a protective cap to prevent the deposit of long-fibred material.



TM00 5478 0895

Fig. 20 Impeller, Unilift AP35B

Shaft seal

The shaft seal is a combination of a mechanical, bellows shaft seal and a lip seal with 2.7 fl.oz. oil between. Seal faces are made of silicone carbide.

Motor cable

The motor is a single- or three-phase asynchronous dry-rotor motor.

Enclosure class: IP68
Insulation class: F (311 °F)
Cable type: SJOW-A.

Single-phase motors have built-in thermal protection.

Adjustment of cable length for float switch

The difference in level between start and stop can be adjusted by changing the free cable length between the float switch and the pump handle.

- Increasing the free cable length will result in fewer starts/stops and a large difference in level.
- Reducing the free cable length will result in more frequent starts/stops and a small difference in level.

In order for the float switch to start and stop the pump, the free cable length must be min. 4". When adjusting the free cable end, make sure that the pump housing is always covered by water.

Intermittent operation

Pumps with float switch are suitable for intermittent operation.

The pump is allowed to run for maximum 5 minutes per 30 minutes without the motor being submerged in the liquid.

Continuous operation

During continuous operation, the pump must always be completely covered by the pumped liquid.

Materials


Component	Material	DIN W.-Nr.	AISI
Pump housing	Stainless steel	1.4301	304
Impeller	Stainless steel	1.4301	304
Washer	Stainless steel	1.4301	304
Protective cap	Novolen 2360 Kx		
Motor unit complete	Parts in contact with liquid: Stainless steel	1.4401	316
Pump shaft - wet end	Stainless steel	1.4301	304
Motor cable	Neoprene		
O-rings	NBR rubber		
Spring	Stainless steel	1.4310	
Pump inlet	Stainless steel	1.4301	304
Ring stand	Polycarbonate		
Oil	Shell Ondina 15, non-toxic		

Selection

The flow velocity through the discharge pipe must be minimum 2.3 ft/s to ensure self-cleaning.

Example: Schedule 40 PVC discharge pipe with an inner diameter of 2.067" requires a minimum flow velocity of approximately 24 gpm.

The overview below shows the maximum lengths of combined vertical and horizontal Schedule 40 PVC discharge pipes.

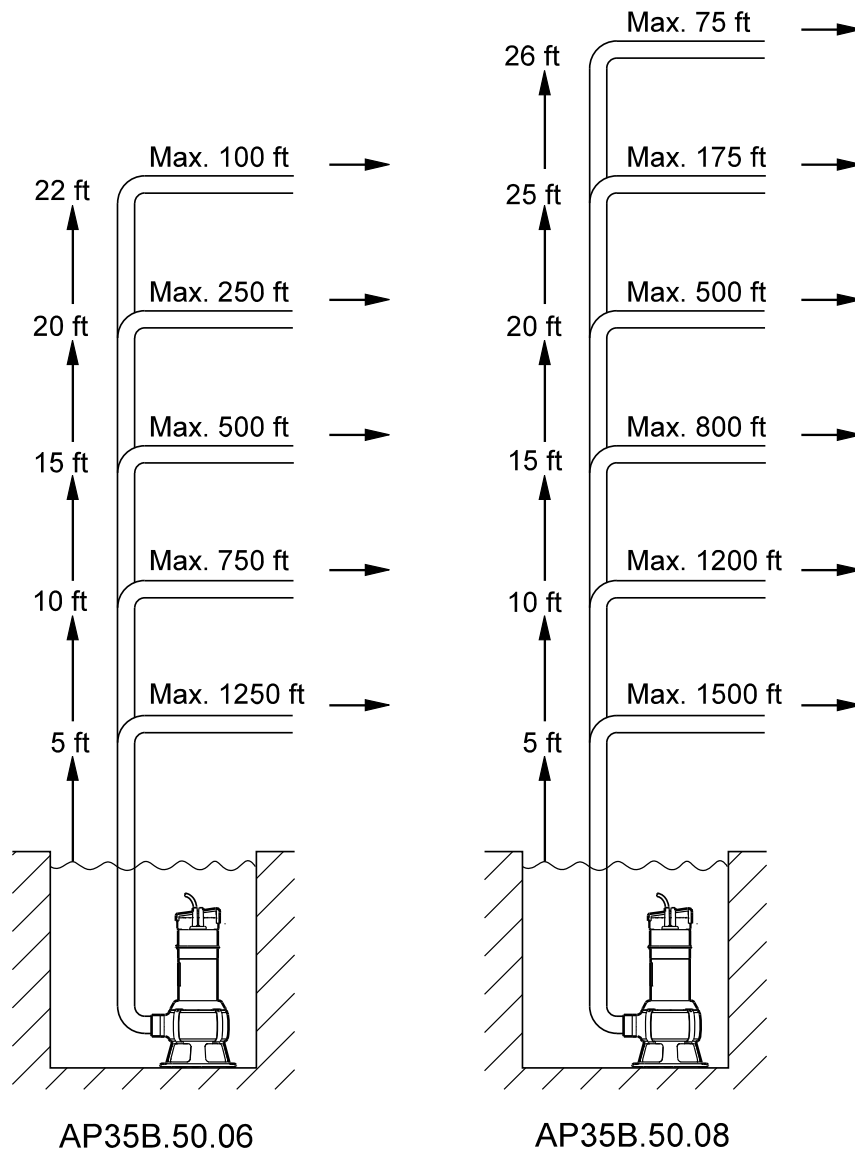

TM04 3038 3508


The overview is only intended as a guide. Grundfos is not liable for installations not complying with the overview.

Note: If a non-return valve is used, the pressure drop in the valve is approximately 0.6 ft head which must be

subtracted from the vertical pipe lengths.

The vertical height of the discharge pipe should be measured from the pump stop level.

Performance curves

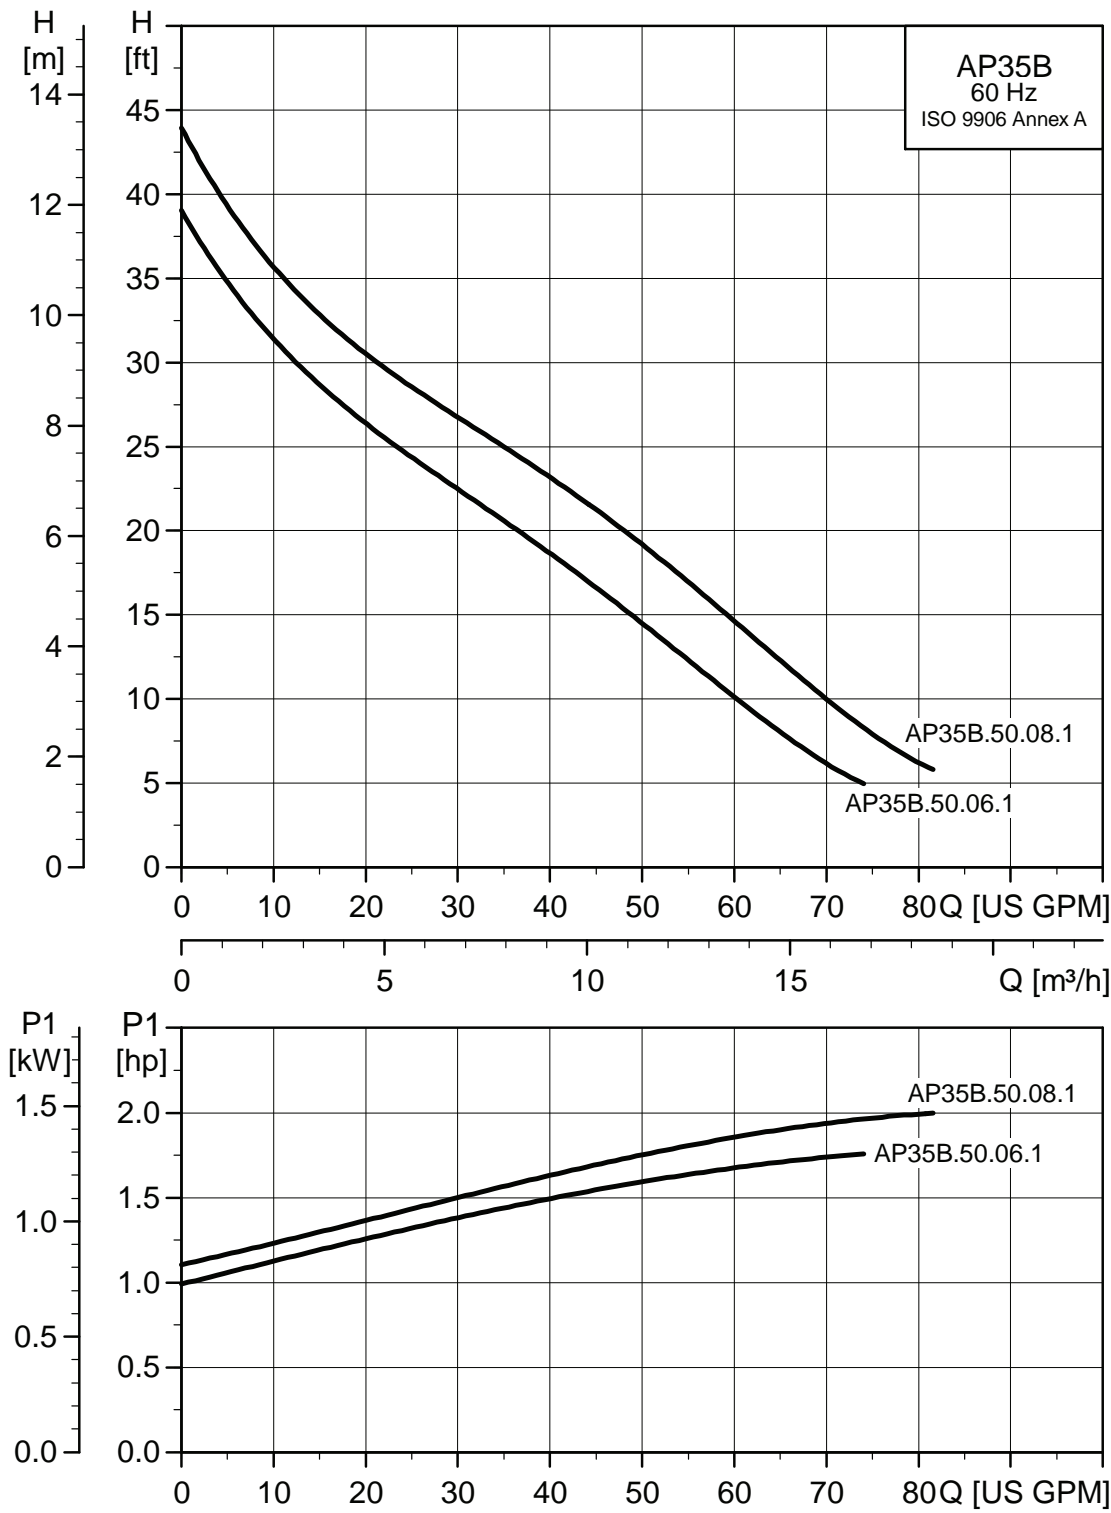


TM04 2996 3508

Technical data


Product no.	Pump type	Voltage [V]	P2 [hp]	I _n [A]	I _{Start} [A]	Dimensions [inches]						Weight [lbs]	Cable length and plug
						A	C	D	S	d1	d2		
96839867	AP35B.50.06.1V	1 x 230	0.8	5.91	21	17.44	4.57	2.87	2 npt	9.21	8.27	20.7	25 feet / No Plug
96839868	AP35B.50.06.1V	1 x 230	0.8	5.91	21	17.44	4.57	2.87	2 npt	9.21	8.27	21.7	10 feet / No Plug
96846954	AP35B.50.06.A1V	1 x 230	0.8	5.91	21	17.44	4.57	2.87	2 npt	9.21	8.27	20.7	25 feet / No Plug
96846957	AP35B.50.06.A1V	1 x 230	0.8	5.91	21	17.44	4.57	2.87	2 npt	9.21	8.27	21.7	10 feet / No Plug
96839950	AP35B.50.08.1V	1 x 230	1.1	5.91	21	18.43	4.57	2.87	2 npt	9.21	8.27	20.7	25 feet / No Plug
96839951	AP35B.50.08.1V	1 x 230	1.1	5.91	21	18.43	4.57	2.87	2 npt	9.21	8.27	21.7	10 feet / No Plug
96846962	AP35B.50.08.A1V	1 x 230	1.1	5.91	21	18.43	4.57	2.87	2 npt	9.21	8.27	20.7	25 feet / No Plug
96846963	AP35B.50.08.A1V	1 x 230	1.1	5.91	21	18.43	4.57	2.87	2 npt	9.21	8.27	21.7	10 feet / No Plug

With float switch

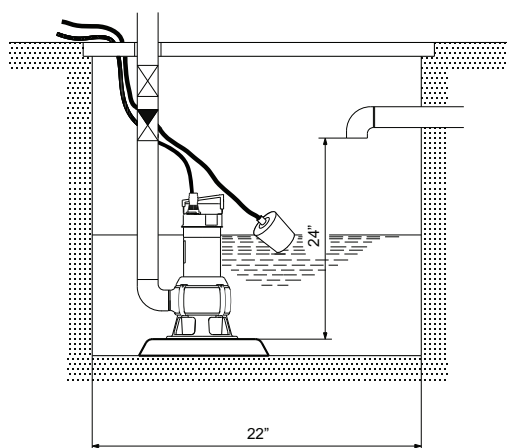

Well dimensions with float switch

Without float switch

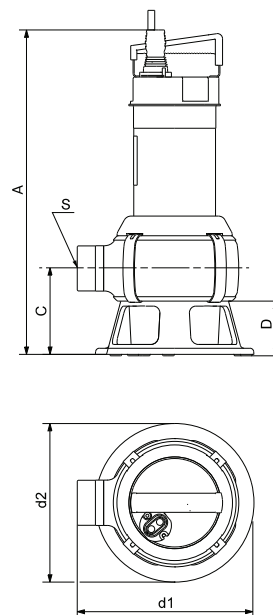

Pump dimensions

Fig. 21 Minimum well dimensions AP35B

If the pump is installed in a collecting well, the minimum dimensions of the well should be as shown above to ensure free movability of the float switch.

The space required corresponds to the physical dimensions of the pump.

Product description



GR117

Fig. 23 Unilift AP50

The Unilift AP50 pump is a single-stage submersible pump designed for pumping effluent and sewage. The pump is suitable for these applications:

- groundwater lowering
- pumping in drainage collecting tanks
- pumping in surface water collecting tanks with in-flow from roof gutters, shafts, tunnels, etc.
- emptying of ponds, tanks, etc.
- pumping of fibre-containing wastewater from laundries and industries
- pumping of domestic wastewater from septic tanks and sludge treating systems
- pumping of domestic wastewater with/without discharge from water closets.

Liquid temperature range: 32 °F to 131 °F.

Approvals



Operation

The pump can be used for automatic as well as manual operation and can be installed in a permanent installation or used as a portable pump.

To enable automatic operation the pump can be fitted with a float switch or it can be connected to an separate level switch and control box for automatic on/off operation.

Pump sleeve and housing

The stainless steel pump sleeve is made in one piece and equipped with an insulated carrying handle.

The suction strainer is clipped on to the pump housing and can easily be removed for maintenance. The strainer prevents the passage of large solids and ensures a slow flow into the pump.

The stainless steel pump housing is fitted with an internal riser pipe ensuring high efficiency. The riser pipe has a number of holes enabling efficient cooling of the motor during operation. The cable entry is of the socket and plug connection type, allowing for quick and easy dismantling.

Discharge port


All Unilift AP50 pumps have a threaded 2 " NPT vertical discharge port.

Shaft and bearings

The stainless steel shaft rotates in maintenance-free prelubricated ball bearings.

Impeller

The stainless steel impeller is a vortex impeller with L-shaped blades and a clearance of 1.97" in the pump housing. The blades are curved backwards to reduce any harmful effect from solid particles and to minimise power consumption. The impeller has a protective cap to prevent the deposit of long-fibred material.



TM00 5477 0895

Fig. 24 Impeller, Unilift AP50

Shaft seal

The shaft seal is a combination of a mechanical, bellows shaft seal and a lip seal with 2 fl.oz. oil between. Seal faces are made of silicone carbide.

Motor

The motor is a single- or three-phase asynchronous dry-rotor motor.

Enclosure class: IP68
Insulation class: F (311 °F)
Cable type: SJOW-A.

Single-phase motors have built-in thermal protection.

Adjustment of cable length for float switch

The difference in level between start and stop can be adjusted by changing the free cable length between the float switch and the pump handle.

- Increasing the free cable length will result in fewer starts/stops and a large difference in level.
- Reducing the free cable length will result in more frequent starts/stops and a small difference in level.

In order for the float switch to start and stop the pump, the free cable length must be min. 4". When adjusting the free cable end, make sure that the suction strainer is always covered by water.

Materials


Component	Material	DIN W.-Nr.	AISI
Pump housing	Stainless steel	1.4301	304
Riser pipe	Stainless steel	1.4301	304
Impeller	Stainless steel	1.4301	304
Pump sleeve	Stainless steel	1.4401	316
Pump shaft - wet end	Stainless steel	1.4301	304
Bearings	Heavy-duty prelubricated ball bearings		
O-rings	NBR rubber		
Screws	Stainless steel	1.4301	304
Cables	Neoprene		
Oil	Shell Ondina 15, non-toxic		

Selection

The flow velocity through the discharge pipe must be minimum 2.3 ft/s to ensure self-cleaning.

Example: Schedule 40 PVC discharge pipe with an inner diameter of 2.067" requires a minimum flow velocity of approximately 24 gpm.

The overview below shows the maximum lengths of combined vertical and horizontal Schedule 40 PVC discharge pipes.

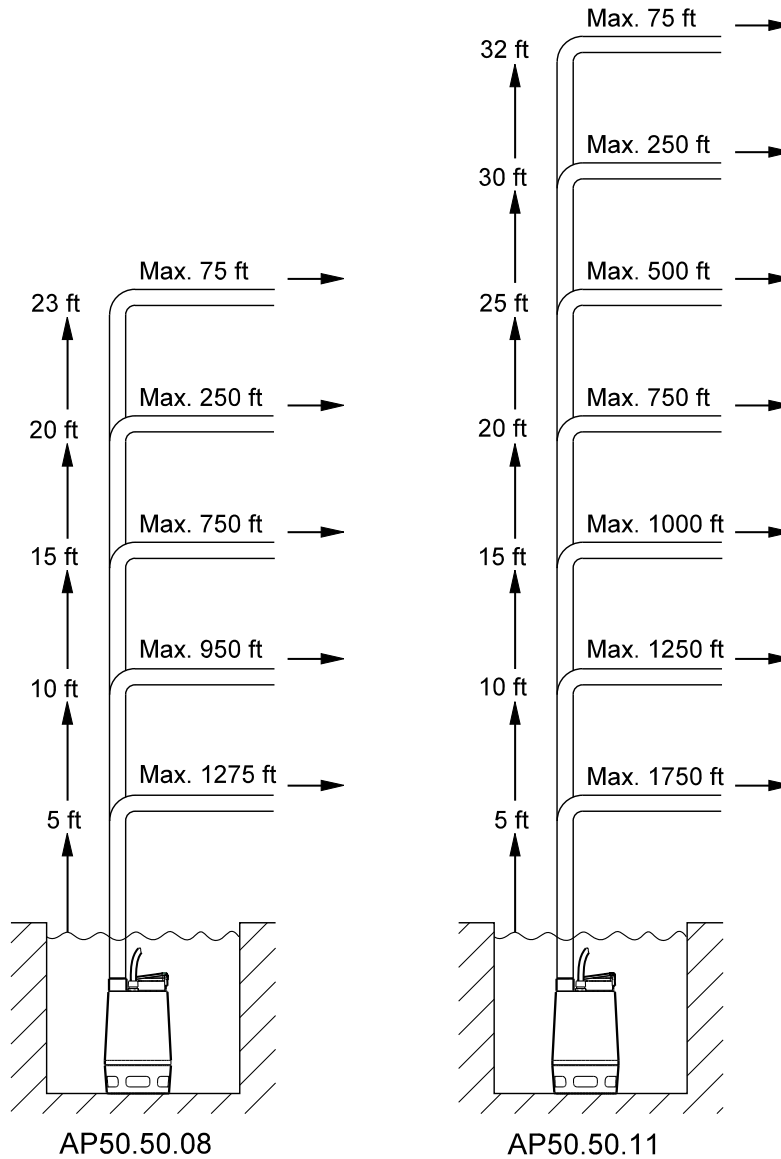

TM04 3037 3508


The overview is only intended as a guide. Grundfos is not liable for installations not complying with the overview.

Note: If a non-return valve is used, the pressure drop in the valve is approximately 0.6 ft head which must be

subtracted from the vertical pipe lengths.

The vertical height of the discharge pipe should be measured from the pump stop level.

Performance curve

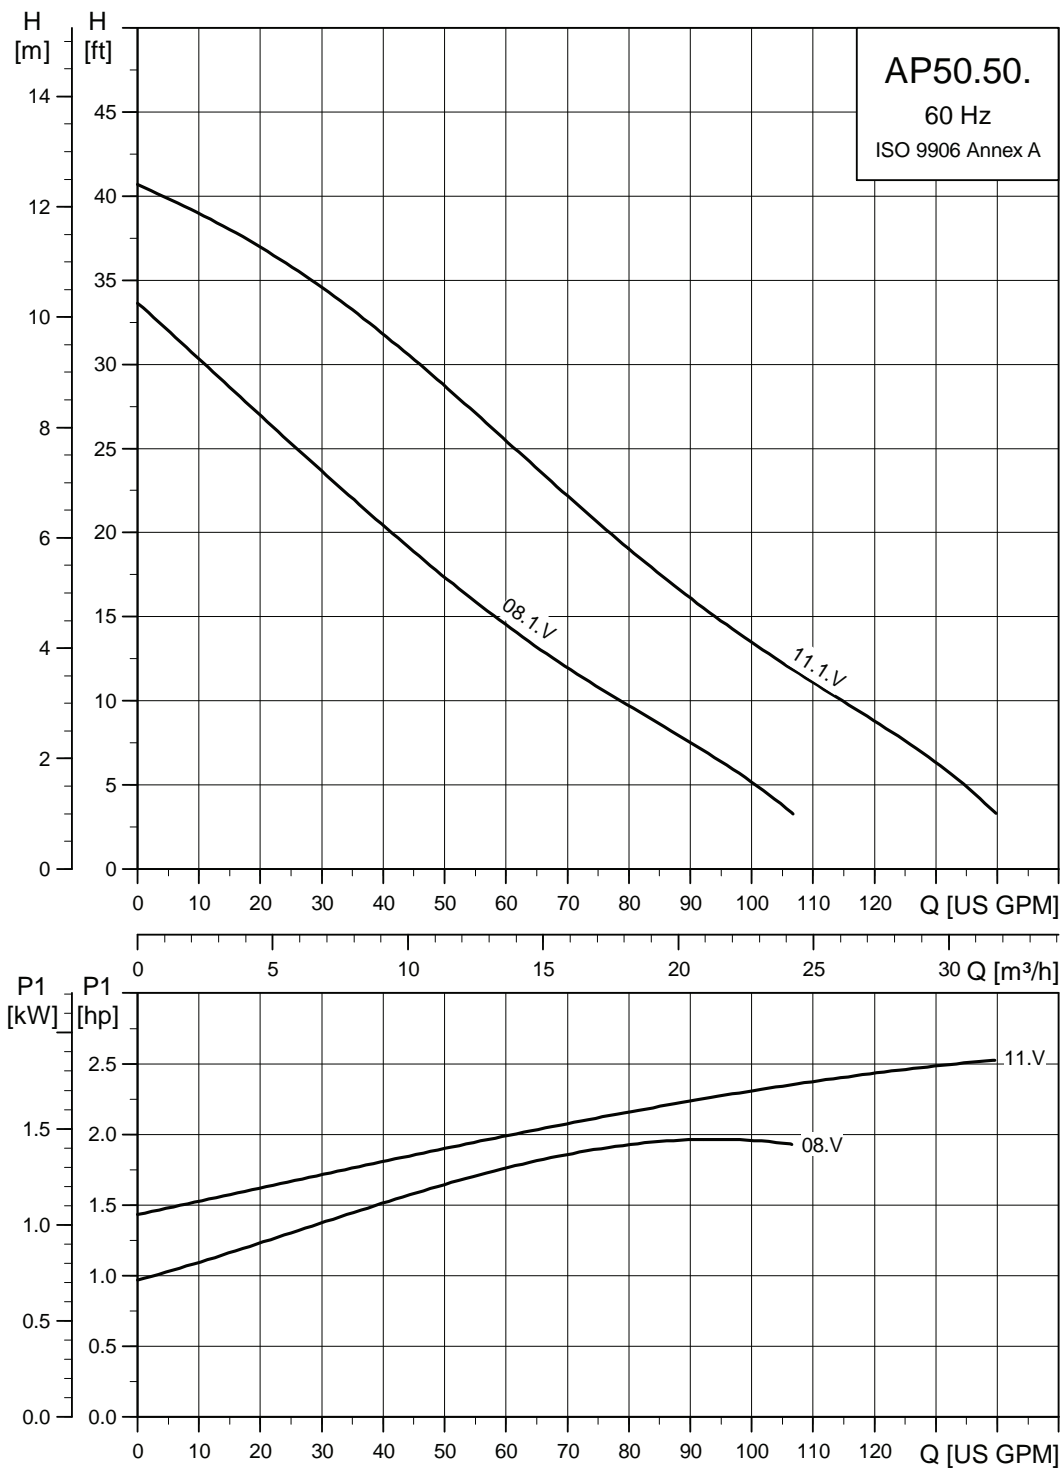

TM04 2997 3508

Technical data

Product no.	Pump type	Voltage [V]	P2 [hp]	I _n [A]	I _{Start} [A]	Dimensions [inches]			Weight [lbs]	Cable length and plug
						A	B	S		
96010686	AP50.50.08..1.V	1 x 230	1.1	6.3	29	17.17	9.49	2 NPT	35.3	10 feet / No Plug
96010689	AP50.50.08.1.V	1 x 230	1.1	6.3	29	17.17	9.49	2 NPT	35.3	25 feet / No Plug
96847180	AP50.50.08.A.1.V	1 x 230	1.1	6.3	29	17.17	9.49	2 NPT	35.3	10 feet / No Plug
96847181	AP50.50.08.A.1.V	1 x 230	1.1	6.3	29	17.17	9.49	2 NPT	37.3	25 feet / No Plug
96010692	AP50.50.11.1.V	1 x 230	1.5	8.4	35	17.17	9.49	2 NPT	35.3	10 feet / No Plug
96010695	AP50.50.11.1.V	1 x 230	1.5	8.4	35	17.17	9.49	2 NPT	35.3	25 feet / No Plug
96847182	AP50.50.11.A.1.V	1 x 230	1.5	8.4	35	17.17	9.49	2 NPT	37.0	10 feet / No Plug
96847183	AP50.50.11.A.1.V	1 x 230	1.5	8.4	35	17.17	9.49	2 NPT	37.3	25 feet / No Plug

With float switch

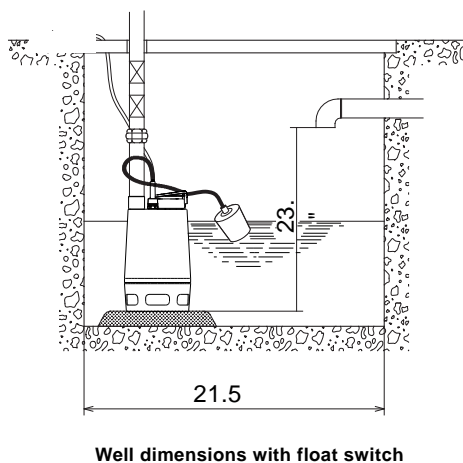


Fig. 25 Minimum well dimensions AP50

If the pump is installed in a collecting well, the minimum dimensions of the well should be as shown above to ensure free movability of the float switch.

The space required corresponds to the physical dimensions of the pump.

Without float switch

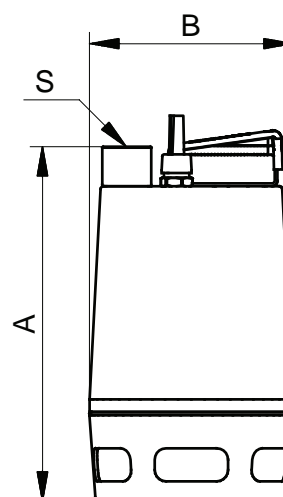


Fig. 26 Pump dimensions

Product description



TM03 8260 0907

Fig. 27 Unilift AP50B

The Unilift AP50B pump is a single-stage submersible pump designed for pumping effluent.

The pump is suitable for these applications:

- groundwater lowering
- pumping in drainage collecting tanks
- pumping in surface water collecting tanks with in-flow from roof gutters, shafts, tunnels, etc.
- emptying of ponds, tanks, etc.
- pumping of fibre-containing effluent from laundries and industries
- pumping of domestic effluent from septic tanks and sludge treating systems
- pumping of domestic effluent without discharge from water closets.

Liquid temperature range: 32 °C to 104 °F.

Approvals



Operation

The pump can be used for automatic as well as manual operation and can be installed in a permanent installation or used as a portable pump.

To enable automatic operation the pump can be fitted with a float switch or it can be connected to separate level switch and control box for automatic on/off operation.

Pump housing

Pump housing with an outstanding design for submersible wastewater pumps resulting in a high head.

The pump housing is made of a steel tube with a smooth surface and a hydraulically correct shape ensuring free passage of particles.

Base, pump inlet and pump housing are fastened to the motor by means of four springs enabling quick and easy dismantling.

Discharge port


All Unilift AP50B pumps have a threaded 2" NPT horizontal discharge port.

Shaft and bearings

The stainless steel shaft rotates in maintenance-free prelubricated ball bearings.

Impeller

The stainless steel impeller is a vortex impeller with L-shaped blades and a clearance of 1.97" in the pump housing. The blades are curved backwards to reduce any harmful effect from solid particles and to minimise power consumption. The impeller has a protective cap to prevent the deposit of long-fibred material.



TM00 5477 0895

Fig. 28 Impeller, Unilift AP50B

Shaft seal

The shaft seal is a combination of a mechanical, bellows shaft seal and a lip seal with 2.7 fl.oz. oil between. Seal faces are made of silicone carbide.

Motor

The motor is a single- or three-phase asynchronous dry-rotor motor.

Enclosure class: IP68
Insulation class: F (311 °F)
Cable type: SJOW-A.

Single-phase motors have built-in thermal protection.

Adjustment of cable length for float switch

The difference in level between start and stop can be adjusted by changing the free cable length between the float switch and the pump handle.

- Increasing the free cable length will result in fewer starts/stops and a large difference in level.
- Reducing the free cable length will result in more frequent starts/stops and a small difference in level.

In order for the float switch to start and stop the pump, the free cable length must be min. 4". When adjusting the free cable end, make sure that the pump housing is always covered by water.

Intermittent operation

Pumps with float switch are suitable for intermittent operation.

The pump is allowed to run for maximum 5 minutes per 30 minutes without the motor being submerged in the liquid.

Continuous operation

During continuous operation, the pump must always be completely covered by the pumped liquid.

Materials


Component	Materials	DIN W.-Nr.	AISI
Pump housing	Stainless steel	1.4301	304
Impeller	Stainless steel	1.4301	304
Washer	Stainless steel	1.4301	304
Protective cap	Novolen 2360 Kx		
Motor unit complete	Parts in contact with liquid: Stainless steel	1.4401	316
Pump shaft	Stainless steel	1.4301	304
Motor cable	Neoprene		
O-rings	NBR rubber		
Spring	Stainless steel	1.4310	
Pump inlet	Stainless steel	1.4301	304
Ring stand	Polycarbonate		
Oil	Shell Ondina 15, non-toxic		

Selection

The flow velocity through the discharge pipe must be minimum 2.3 ft/s to ensure self-cleaning.

Example: Schedule 40 PVC discharge pipe with an inner diameter of 2.067" requires a minimum flow velocity of approximately 24 gpm.

The overview below shows the maximum lengths of combined vertical and horizontal Schedule 40 PVC discharge pipes.

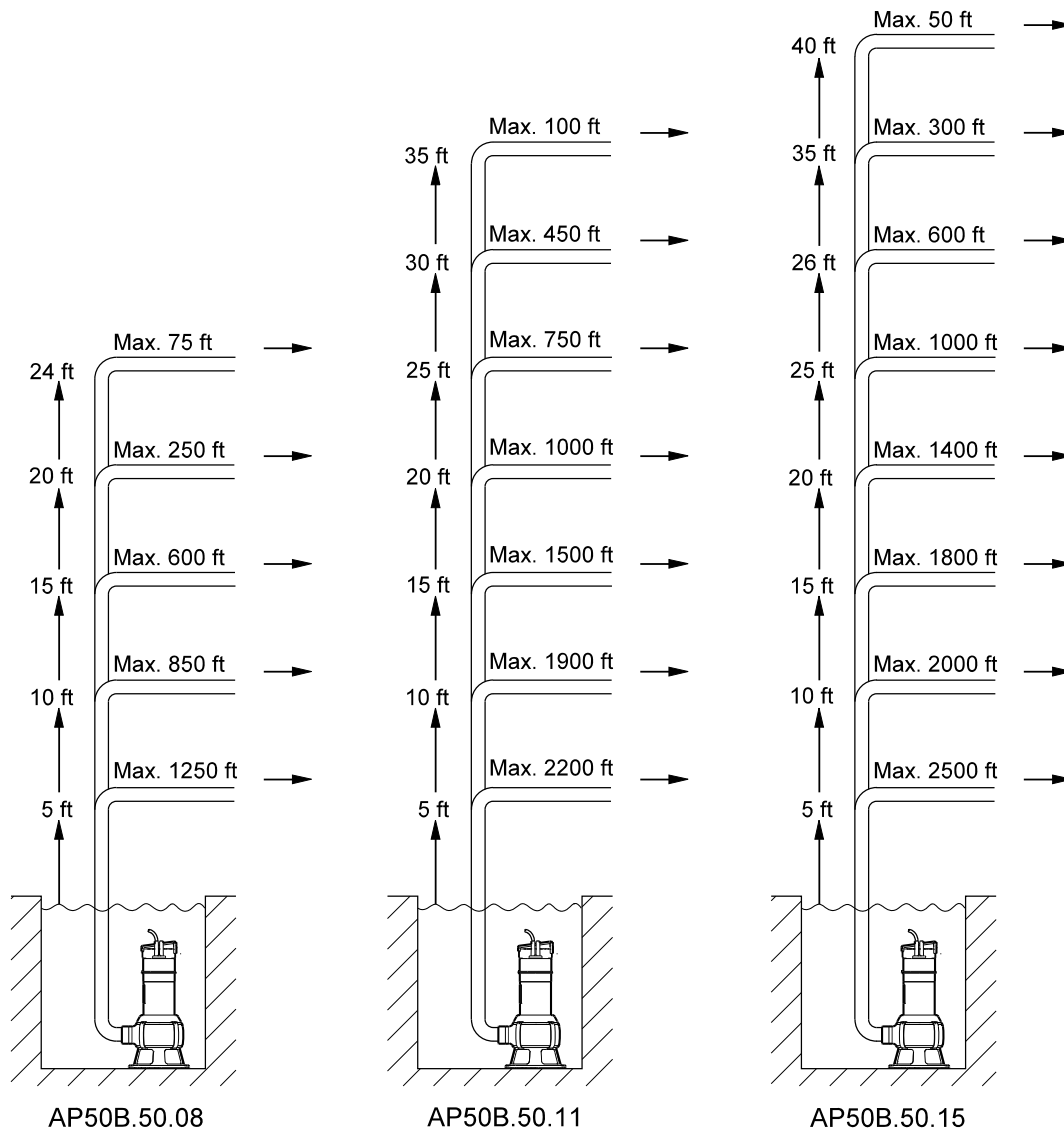


TM04 3039 3508

The overview is only intended as a guide. Grundfos is not liable for installations not complying with the overview.

Note: If a non-return valve is used, the pressure drop in the valve is approximately 0.6 ft head which must be subtracted from the vertical pipe lengths.

The vertical height of the discharge pipe should be measured from the pump stop level.

Performance curves

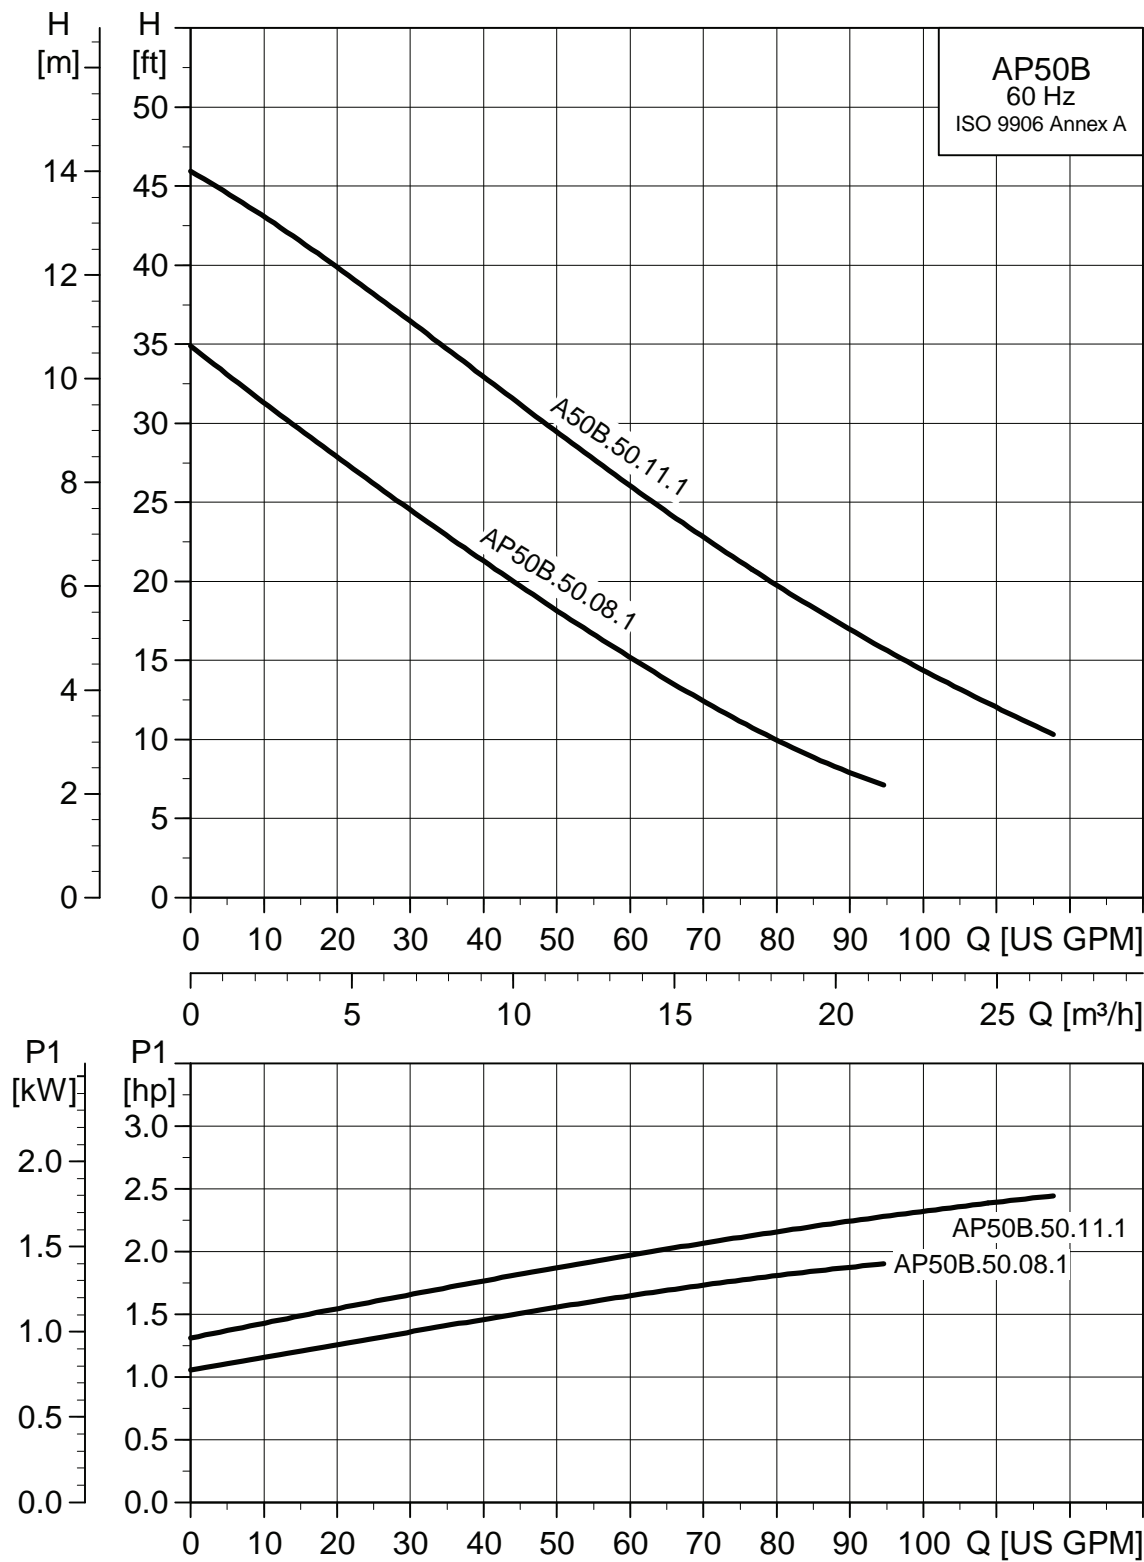

TM04 3690 4808

Technical data

Product no.	Pump type	Voltage [V]	P2 [hp]	I _n [A]	I _{Start} [A]	Dimensions [inches]						Weight [lbs]	Cable length and plug
						A	C	D	S	d1	d2		
96839975	AP50B.50.08.1V	1 x 230	1.1	6.4	29	18.43	4.57	2.87	2 NPT	9.21	8.27	24.2	25 feet / No Plug
96839978	AP50B.50.08.1V	1 x 230	1.1	6.4	29	18.43	4.57	2.87	2 NPT	9.21	8.27	25.2	10 feet / No Plug
96846966	AP50B.50.08.A1V	1 x 230	1.1	6.4	29	18.43	4.57	2.87	2 NPT	9.21	8.27	24.2	25 feet / No Plug
96846967	AP50B.50.08.A1V	1 x 230	1.1	6.4	29	18.43	4.57	2.87	2 NPT	9.21	8.27	25.2	10 feet / No Plug
96839985	AP50B.50.11.1V	1 x 230	1.5	8.42	35	18.43	4.57	2.87	2 NPT	9.21	8.27	24.2	25 feet / No Plug
96839987	AP50B.50.11.1V	1 x 230	1.5	8.42	35	18.43	4.57	2.87	2 NPT	9.21	8.27	25.2	10 feet / No Plug
96846971	AP50B.50.11.A1V	1 x 230	1.5	8.42	35	18.43	4.57	2.87	2 NPT	9.21	8.27	24.2	25 feet / No Plug
96846972	AP50B.50.11.A1V	1 x 230	1.5	8.42	35	18.43	4.57	2.87	2 NPT	9.21	8.27	25.2	10 feet / No Plug

With float switch

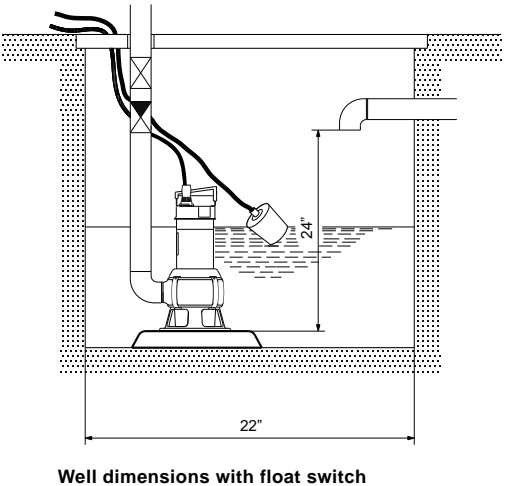


Fig. 29 Minimum well dimensions AP50B

If the pump is installed in a collecting well, the minimum dimensions of the well should be as shown above to ensure free movability of the float switch.

The space required corresponds to the physical dimensions of the pump.

Without float switch

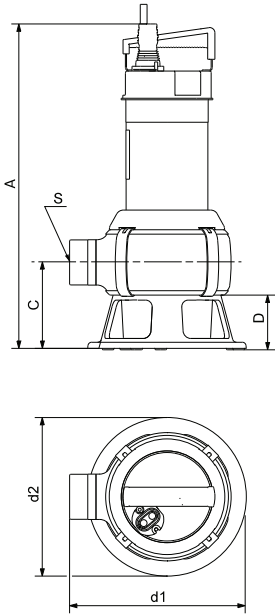


Fig. 30 Pump dimensions

TM04 3182 3909

TM04 3046 3508

Product description



Fig. 31 EF pump

Technical data

Performance range:

- Flow range: 1-120 GPM
- Head: 0-90 ft.

Solids handling:

- 0.75" spherical solids.

Motor:

- AC induction
- Permanent split capacitor
- Oil-filled with Durasyn® 166
- Insulation class: F.

Operation:

Semi-continuous operation

- If fully submerged: Max. 8 hours in a 24 hour period.

Intermittent operation

- Max. 20 starts per hour – evenly distributed once every 3 minutes.

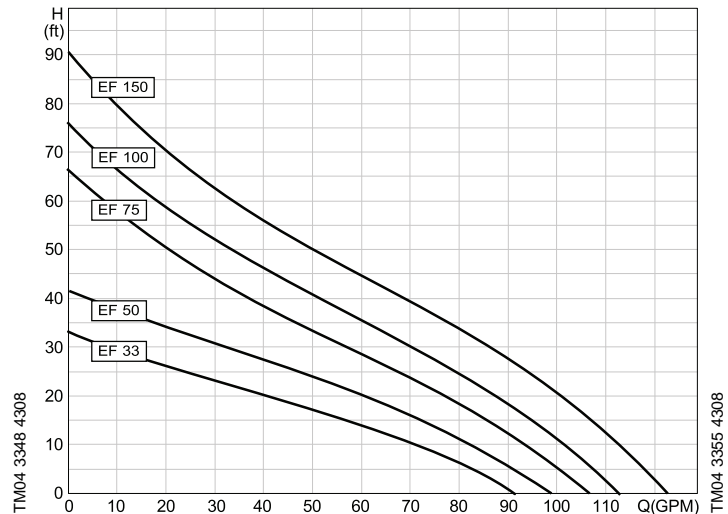


Fig. 32 Performance curves

Thermal protection

- Automatic reset
If motor is cut out by the thermal protection, it will cut in again after cooling off.

Liquid temperature limits when fully submerged:

- Semi-continuous operation: 32-104 °F (0-40 °C)
- Intermittent operation: 32-140 °F (0-60 °C).

Discharge port:

- 2" female NPT.

Impeller:

- Semi-open

Installation depth:

- Max. 30 ft below water level.

Approvals:

- cUL and UL.

Power Cable:

- 10 or 20 ft long.

Electrical data

Product number	Pump type	Cable length [ft]	Float switch	hp	Service factor	pH	Input voltage [V]	Max. power consumption [W]	Max. current [A]	Locked-rotor current [A]	Rated speed [rpm]
96001469	EF33	10	Yes	0.33	1.7	1	115	905	8.4	18	1650
96001470		20	Yes	0.33	1.7	1	230	830	3.9	9	1640
96001471		10	No	0.33	1.7	1	115	905	8.4	18	1650
96001472		20	No	0.33	1.7	1	230	830	3.9	9	1640
96001473		10	Yes	0.33	1.7	1	115	905	8.4	18	1650
96001474		20	Yes	0.33	1.7	1	230	830	3.9	9	1640
96001475		10	No	0.33	1.7	1	115	905	8.4	18	1650
96001476		20	No	0.33	1.7	1	230	830	3.9	9	1640
96001493	EF50	10	Yes	0.5	1.6	1	115	1190	11.5	24	1655
96001494		20	Yes	0.5	1.6	1	230	1115	5.4	12	1655
96001495		10	No	0.5	1.6	1	115	1190	11.5	24	1655
96001496		20	No	0.5	1.6	1	230	1115	5.4	12	1655
96001497		10	Yes	0.5	1.6	1	115	1190	11.5	24	1655
96001498		20	Yes	0.5	1.6	1	230	1115	5.4	12	1655
96001499		10	No	0.5	1.6	1	115	1190	11.5	24	1655
96001500		20	No	0.5	1.6	1	230	1115	5.4	12	1655
96001519	EF75	10	Yes	0.75	1.5	1	230	1690	7.6	23	3390
96001520		20	Yes	0.75	1.5	1	230	1690	7.6	23	3390
96001521		10	No	0.75	1.5	1	230	1690	7.6	23	3390
96001522		20	No	0.75	1.5	1	230	1690	7.6	23	3390
96001539	EF100	10	Yes	1	1.4	1	230	2240	10.1	23	3290
96001540		20	Yes	1	1.4	1	230	2240	10.1	23	3290
96001541		10	No	1	1.4	1	230	2240	10.1	23	3290
96001542		20	No	1	1.4	1	230	2240	10.1	23	3290
96001559	EF150	10	Yes	1.5	1.3	1	230	2880	13.1	30	3340
96001560		20	Yes	1.5	1.3	1	230	2880	13.1	30	3340
96001561		10	No	1.5	1.3	1	230	2880	13.1	30	3340
96001562		20	No	1.5	1.3	1	230	2880	13.1	30	3340

Dimensional drawing

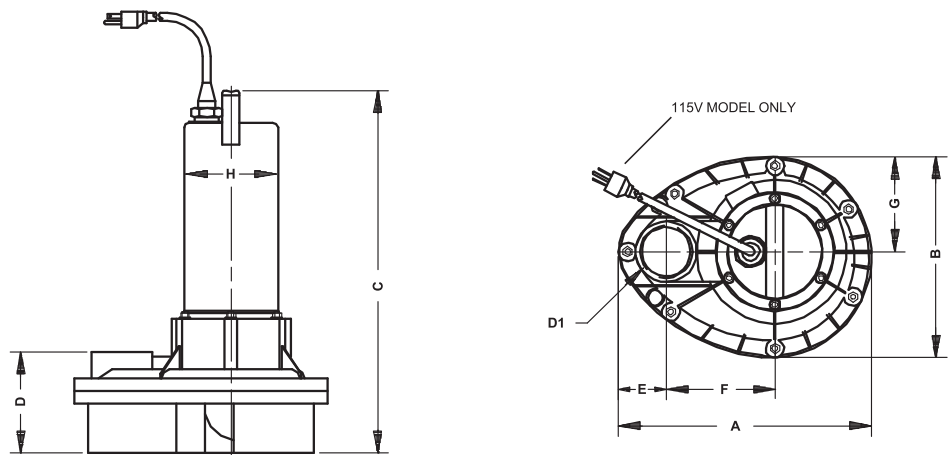


Fig. 33 Dimensional drawings EF pumps

Dimensions and weights

Pump type	D1 discharge port [inches]	Dimensions [inches]								Shipping weight [lbs]	Shipping volume [cu ft]
		A	B	C	D	E	F	G	H		
EF33	2 NPT	11.5	8.75	15	4.375	2.188	5	4.375	4.125	25.5	1.82
EF50	2 NPT	11.5	8.75	16.375	4.375	2.188	5	4.375	4.125	30	1.82
EF75	2 NPT	11.5	8.75	16.375	4.375	2.188	5	4.375	4.125	30	1.82
EF100	2 NPT	11.5	8.75	16.375	4.375	2.188	5	4.375	4.125	33	1.82
EF150	2 NPT	11.5	8.75	16.375	4.375	2.188	5	4.375	4.125	33	1.82

Materials

Description	Material
Motor housing	AISI 316 SS
Volute top	Polypropylene
Volute bottom	Polypropylene
Impeller	Ryton BR111
Shaft	AISI 304 SS
Motor/pump shaft	1045 mild steel/DIN W-Nr. 1.4301 SS
Mechanical shaft seal	NBR
Lip seal and O-rings	NBR
Power cable	SJOW-A-Neoprene (3-prong)
Motor liquid	Durasyn® 166 dielectric oil
Cable nut	Ryton
3-pin connector	Rynite 530FR
Screw (Philips)	AISI 304 SS
Screw (Hi-Lo Torx)	AISI 303 SS

®Registered trademark of Amococ Oil Company

TM04 3346 4308

Product description



Fig. 34 EF33E pump

Technical data

Performance Range:

- Flow range: 1-64 GPM
- Head: 0-27 ft.

Solids Handling:

- 0.75" spherical solids

Motor:

- AC induction
- Permanent split capacitor
- Oil-filled with Durasyn® 166
- Insulation class: F
- Thermally protected.

Operation:

Semi-continuous operation

- If fully submerged: Max. 8 hours in a 24 hour period.

Intermittent operation

- Max. 20 starts per hour – evenly distributed once every 3 minutes.

Thermal Protection

- Automatic reset
If motor is cut out by the thermal protection, it will cut in again after cooling off.

Liquid temperature limits when fully submerged:

- Semi-continuous operation: 32-104 °F (0-40 °C)
- Intermittent operation: 32-140 °F (0-60 °C).



Fig. 35 Performance curve

Discharge port:

- 1.5" female NPT

Impeller:

- Centrifugal

Motor bearings:

- Two bronze sleeve bearings

Installation depth:

- Max. 30 ft below water level.

Approvals:

- cUL and UL

Power Cable:

- 10 or 20 ft long.

Electrical data

Product number	Pump type	Cable length [ft]	Float switch	hp	Service factor	pH	Input voltage [V]	Max. power consumption [W]	Max. current [A]	Locked-rotor Current [A]	Rated speed [rpm]
96001451	EF33E	10	Yes	0.33	1.15	1	115	675	6	12	3140
96001452		20	Yes	0.33	1.15	1	115	675	6	12	3140
96001453		10	No	0.33	1.15	1	230	600	2.7	6	3145
96001454		20	No	0.33	1.15	1	230	600	2.7	6	3145
96001455		10	Yes	0.33	1.15	1	115	675	6	12	3140
96001456		20	Yes	0.33	1.15	1	115	675	6	12	3140
96001457		10	No	0.33	1.15	1	230	600	2.7	6	3145
96001458		20	No	0.33	1.15	1	230	600	2.7	6	3145

Dimensional drawing

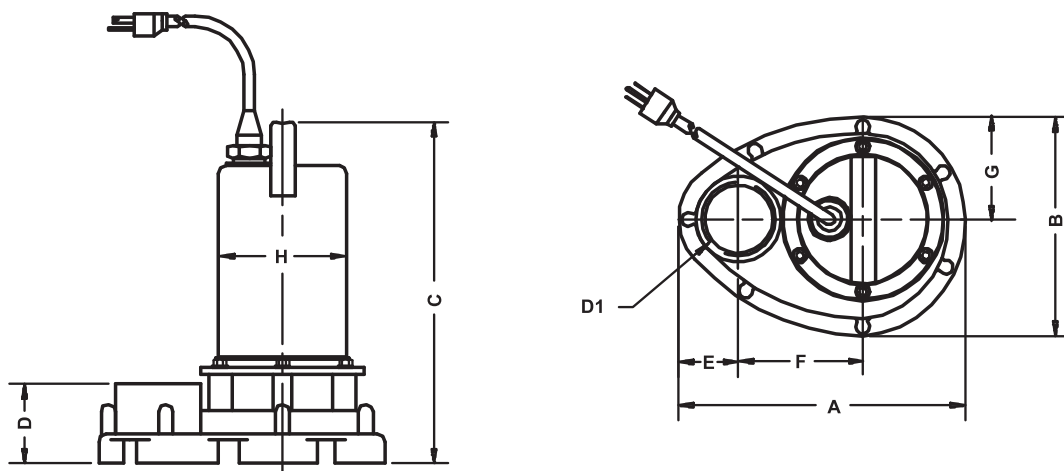


Fig. 36 Dimensional drawings EF33E pump

TM04 3347 4308

Dimensions and weight

Pump type	D1 discharge port [inches]	Dimensions [inches]								Shipping weight [lbs]	Shipping volume [cu ft]
		A	B	C	D	E	F	G	H		
EF33E	1.5 NPT	9.625	7.125	13.25	2.625	2	4.188	3.438	4.313	21	0.92

Materials

Description	Material
Motor housing	AISI 316 SS
Volute	Polypropylene
Impeller	Polypropylene
Mechanical shaft seal	Silicon carbide, NBR, AISI 316 SS
Motor/pump shaft	1045 mild steel/DIN W-Nr. 1.4301 SS
Motor housing O-ring, pin-connector O-ring	NBR
Sleeve bushings	Bronze, oil-impregnated
Base plate	Mild steel
Screw (Hi-Lo Torx)	AISI 303 SS
Screw (Phillips)	AISI 302 SS
Cable nut	AISI 304 SS
Power cable	Neoprene (3-prong)
Motor liquid	Durasyn® 166 dielectric oil

Product description



Fig. 37 SE pump

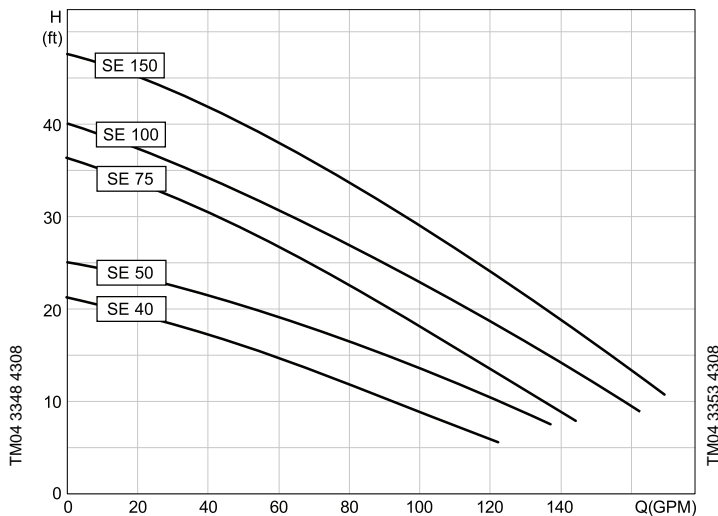


Fig. 38 Performance curve

Technical data

Performance range:

- Flow range: 2-170 GPM
- Head: 0-48 ft.

Solids handling:

- 2" spherical solids

Motor:

- AC induction
- Permanent split capacitor
- Oil-filled with Durasyn® 166
- Insulation class: F
- Thermally protected

Operation:

Semi-continuous operation

- If fully submerged: Max. 8 hours in a 24 hour period.

Intermittent operation

- Max. 20 starts per hour – evenly distributed once every 3 minutes.

Motor bearings:

- One ball/sleeve bearing

Liquid temperature limits when fully submerged:

- Semi-continuous operation: 32-104 °F (0-40 °C)
- Intermittent operation: 32-140 °F (0-60 °C).

Discharge port:

- 2" female NPT

Thermal protection

- Automatic reset
If motor is cut out by the thermal protection, it will cut in again after cooling off.

Impeller:

- Vortex

Installation depth:

- Max. 30 ft below water level.

Approvals:

- CSA-approved
- UL-listed

Power Cable:

- 10 or 20 ft long.

Electrical data

Product number	Pump type	Cable length [ft]	Float switch	hp	Service factor	pH	Input voltage [V]	Max. power consumption [W]	Max. current [A]	Locked-rotor current [A]	Rated speed [rpm]
96001461	SE40	10	Yes	0.4	1.4	1	115	935	8.2	18	1625
96001462		20	Yes	0.4	1.4	1	115	850	3.9	9	1615
96001463		10	No	0.4	1.4	1	115	935	8.2	18	1625
96001464		20	No	0.4	1.4	1	115	850	3.9	9	1615
96001465		10	Yes	0.4	1.4	1	230	935	8.2	18	1625
96001466		20	Yes	0.4	1.4	1	230	850	3.9	9	1615
96001467		10	No	0.4	1.4	1	230	935	8.2	18	1625
96001468		20	No	0.4	1.4	1	230	850	3.9	9	1615
96001481	SE50	10	Yes	0.5	1.6	1	115	1155	11.2	24	1635
96001482		20	Yes	0.5	1.6	1	115	1110	5.2	12	1630
96001483		10	No	0.5	1.6	1	115	1155	11.2	24	1635
96001484		20	No	0.5	1.6	1	115	1110	5.2	12	1630
96001485		10	Yes	0.5	1.6	1	230	1155	11.2	24	1635
96001486		20	Yes	0.5	1.6	1	230	1110	5.2	12	1630
96001487		10	No	0.5	1.6	1	230	1155	11.2	24	1635
96001488		20	No	0.5	1.6	1	230	1110	5.2	12	1630
96001511	SE75	10	Yes	0.75	1.5	1	230	2155	9.7	23	3335
96001512		20	Yes	0.75	1.5	1	230	2155	9.7	23	3335
96001513		10	No	0.75	1.5	1	230	2155	9.7	23	3335
96001514		20	No	0.75	1.5	1	230	2155	9.7	23	3335
96001531	SE100	10	Yes	1	1.4	1	230	2290	10.3	23	3315
96001532		20	Yes	1	1.4	1	230	2290	10.3	23	3315
96001533		10	No	1	1.4	1	230	2290	10.3	23	3315
96001534		20	No	1	1.4	1	230	2290	10.3	23	3315
96001551	SE150	10	Yes	1.5	1.3	1	230	2890	13.1	30	3350
96001552		20	Yes	1.5	1.3	1	230	2890	13.1	30	3350
96001553		10	No	1.5	1.3	1	230	2890	13.1	30	3350
96001554		20	No	1.5	1.3	1	230	2890	13.1	30	3350

Dimensional drawing

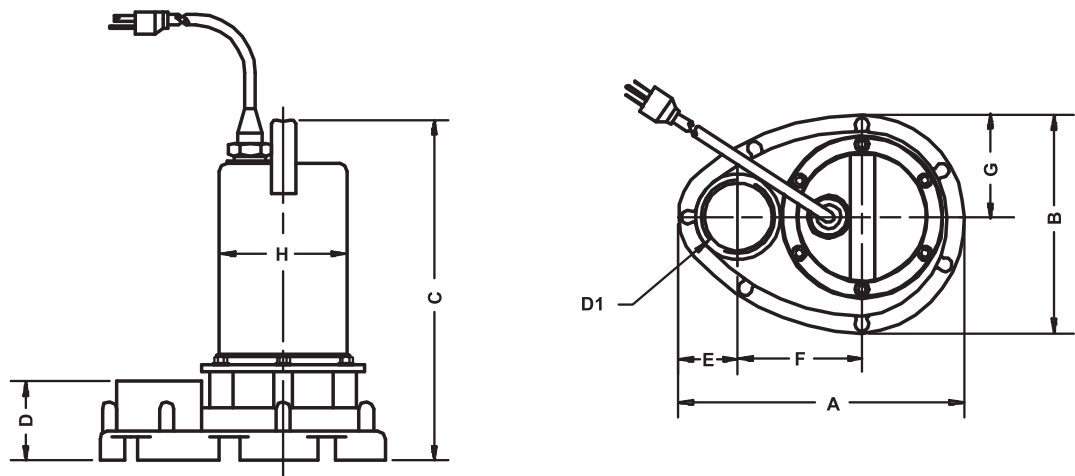


Fig. 39 Dimensional drawings

Dimensions and weights

Pump type	D1 discharge port [inches]	Dimensions [inches]								Shipping weight [lbs]	Shipping volume [cu ft]
		A	B	C	D	E	F	G	H		
SE40	2 NPT	11.5	8.5	17.625	6.625	2	5	4.375	4.125	27	1.94
SE50	2 NPT	11.5	8.5	19.25	6.625	2	5	4.375	4.125	31	1.94
SE75	2 NPT	11.5	8.5	19.25	6.625	2	5	4.375	4.125	31	1.94
SE100	2 NPT	11.5	8.5	19.25	6.625	2	5	4.375	4.125	31	1.94
SE150	2 NPT	11.5	8.5	19.25	6.625	2	5	4.375	4.125	33	1.94

Materials

Description	Material
Motor housing	AISI 316 SS
Volute, top	Polypropylene
Volute, bottom	Polypropylene
Impeller and upper volute gland	Ryton BR111
Motor/pump shaft	1045 mild steel/DIN W-Nr. 1.4301 SS
Mechanical shaft seal	Ceramic, carbon, NBR, AISI 316 SS
Lip seal, volute O-ring, motor housing O-ring and pin connector	NBR
O-ring, port plug O-ring, shaft seal O-ring	NBR
Port plug	Amodel 1125 HS®
3-pin connector	Rynite 530FR
Screw, Hi-Lo Torx, 1/4" washer	AISI 303 SS
Coated screw and nut, ball bearing, cable nut	AISI 304 SS
Spacer ring	ABS plastic
Sleeve bearing	Bronze
Power cable	SJOW-A-Neoprene (3-prong)
Motor liquid	Durasyn® 166 dielectric oil

®Registered trademark of Amococ Oil Company

TM04 3347 4308

Product description



Fig. 40 Sewage E-paQ

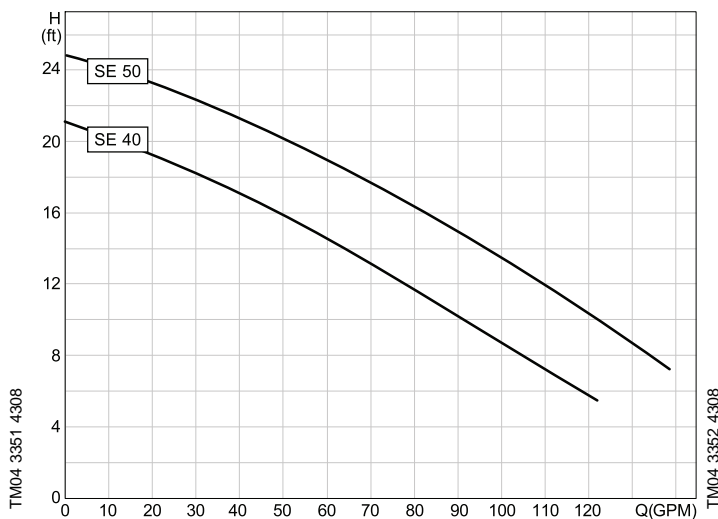


Fig. 41 Performance curves

Technical data

Performance range:

- Flow range: 2-170 GPM
- Head: 0-48 ft.

Solids handling:

- 2" spherical solids

Motor:

- AC induction
- Permanent split capacitor
- Oil filled
- Insulation class: F.

Operation:

Semi-continuous operation

- If fully submerged: Max. 8 hours in a 24 hour period.

Intermittent operation

- Max. 20 starts per hour – evenly distributed once every 3 minutes.

Thermal protection

- Automatic reset
If motor is cut out by the thermal protection, it will cut in again after cooling off.

Motor Bearing System:

- 1 Ball/1 Sleeve Bearing

Liquid temperature limits when fully submerged:

- Semi-continuous operation: 32-104 °F (0-40 °C)
- Intermittent operation: 32-140 °F (0-60 °C) (approx 3-4 minutes).

Discharge port:

- 2" female NPT

Impeller:

- Vortex

Installation depth:

- Max. 30 ft below water level.

Approvals:

- Pump: UL-listed
- Float switch: UL-recognized.

Electrical data

Product number	Pump type	hp	pH	Input voltage [V]	Basin size [inches]	Discharge vent [inches]	Vent size [inches]	Cable length [ft]	Service factor	Max. power consumption [W]	Max. current [A]	Locked-rotor current [A]	Rated speed [rpm]
96001022	SE40EPAQ10-2	0.4	1	115	18x30	2	2	10	1.4	935	8.7	18	1625
96001023	SE40EPAQ20-2	0.4	1	115	18x30	2	2	20	1.4	935	8.7	18	1625
96001089	SE40EPAQ10-3	0.4	1	115	18x30	2	3	10	1.4	935	8.7	18	1625
96001092	SE40EPAQ20-3	0.4	1	115	18x30	2	3	20	1.4	935	8.7	18	1625
96001026	SE50EPAQ10-2	0.5	1	115	18x30	2	2	10	1.6	1155	11.2	24	1635
96001027	SE50EPAQ20-2	0.5	1	115	18x30	2	2	20	1.6	1155	11.2	24	1635
96001093	SE50EPAQ10-3	0.5	1	115	18x30	2	3	10	1.6	1155	11.2	24	1635
96001094	SE50EPAQ20-3	0.5	1	115	18x30	2	3	20	1.6	1155	11.2	24	1635

Dimensional drawing

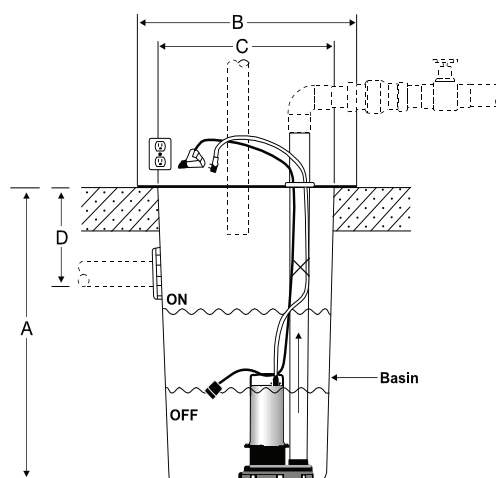


Fig. 42 Dimensional drawing

Dimensions and weights

Pump type	Discharge port [inches]	Dimensions [inches]				Shipping weight [lbs]	Shipping volume [cu ft]
		A	B	C	D		
SE40EPAQ10-2	2	30	22	18.375	10.5	47	8.4
SE40EPAQ10-3	2	30	22	18.375	10.5	47	8.4
SE50EPAQ10-2	2	30	22	18.375	10.5	51	8.4
SE50EPAQ10-3	2	30	22	18.375	10.5	51	8.4

Materials

Description	Material
Motor housing	AISI 316 SS
Volute, top	Amodel 1125 HS®/Polypropylene
Volute, bottom	Polypropylene
Basin	Polypropylene
Cover	S2410 Steel
Bolts and washers	Cadmium-plated steel
Fittings and discharge pipe	PVC

E-paQ assembly components

Description	Quantity
Poly basin and cover	1
Pump	1
Wide angle float switch	1
Discharge drop riser pipe assembly (28")	1
Hardware packet	1
Installation and operating instructions	1

TM04 3345 4308

Product description



Fig. 43 EF25 pump

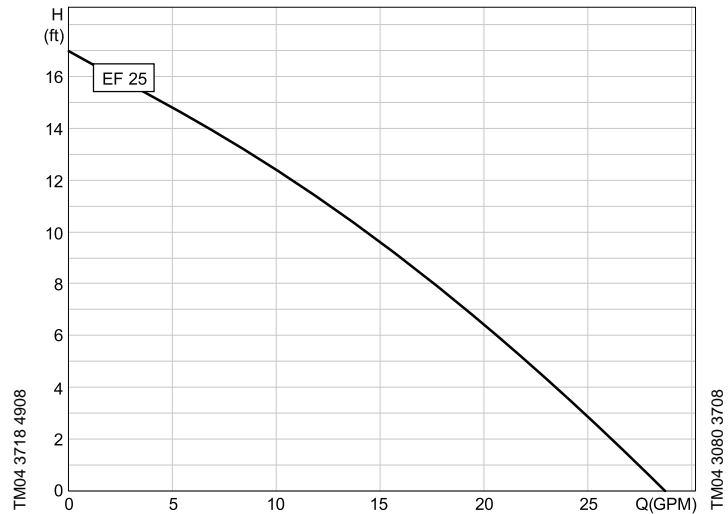


Fig. 44 Performance curve

Technical data

Performance Range:

- Flow range: 1-28 GPM
- Head: 0-17 ft.

Solids Handling:

- 0.5" spherical solids.

Motor:

- AC induction
- Oil filled
- Insulation class: C
- Automatic thermal reset
If motor is cut out by the thermal protection, it will cut in again after cooling off.

Operation:

Semi-continuous operation

- If fully submerged: Max. 8 hours in a 24 hour period.

Intermittent operation

- Max. 20 starts per hour – evenly distributed once every 3 minutes.

Liquid temperature limits when fully submerged:

- 40 °F (4.4 °C)
- 120 °F (48.9 °C).

Discharge port:

- 1.25" female NPT and 0.75" adjustable hose fitting (included)

Impeller:

- Vortex

Installation depth:

- Max. 30 ft below water level.

Approvals:

- CSA-approved
- UL-listed

Power Cable:

- 8 ft.

Electrical data

Product number	Pump type	Cable length [ft]	Float switch	hp	Service factor	pH	Input voltage [V]	Max. power consumption [W]	Max. current [A]	Locked-rotor current [A]	Rated speed [rpm]
96001478	EF25	8	No	0.25	1.0	1	115	530	6.2	6.84	3000

Dimensional drawing

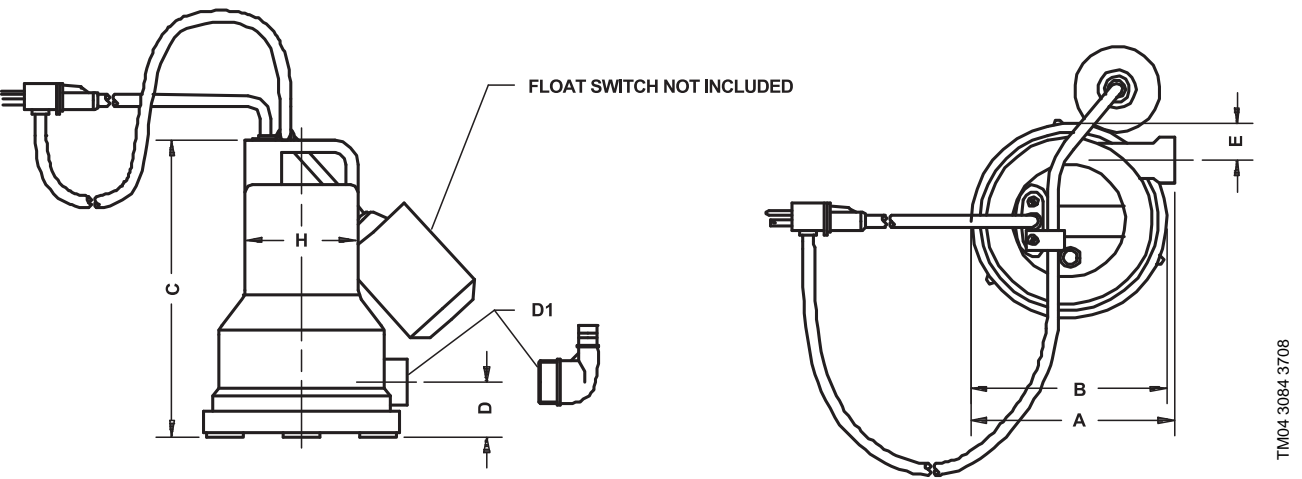


Fig. 45 Dimensional drawings

Dimensions and weight

Pump type	D1 discharge port [inches]	Dimensions [inches]						Shipping weight [lbs]	Shipping volume [cu ft]
		A	B	C	D	E	H		
EF25	1.25 NPT	6.5	6.25	9.5	1.75	1.75	3.625	7	0.26

Materials

Description	Material
Motor housing	Glass-reinforced thermoplastics
Volute	Glass-reinforced thermoplastics
Impeller	Glass-reinforced thermoplastics
Shaft	AISI 416 SS
Lip seal and O-rings	Buna N
Power cable	Neoprene (3-prong)
Interior of motor	Oil filled - Polyalphaolefin

Product description



Fig. 46 SU25 pump

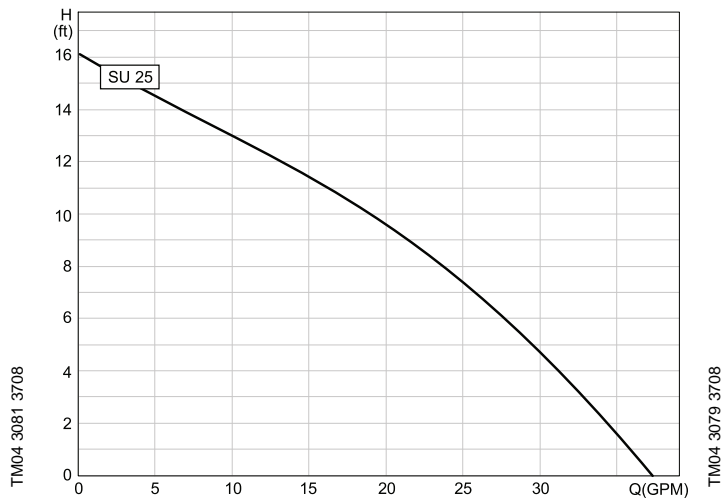


Fig. 47 Performance curve

Technical data

Performance Range:

- Flow range: 1-36 GPM
- Head: 0-16 ft.

Solids handling:

- 0.188" spherical solids

Motor:

- AC induction
- Oil filled
- insulation Class: C.

Operation:

Semi-continuous operation

- If fully submerged: Max. 8 hours in a 24 hour period.

Intermittent operation

- Max. 20 starts per hour – evenly distributed once every 3 minutes.

Thermal protection

- Automatic reset
If motor is cut out by the thermal protection, it will cut in again after cooling off.

Liquid temperature limits when fully submerged:

- Minimum: 40 °F (4.4 °C)
- Maximum: 120 °F (48.9 °C).

Discharge port:

- 1.5" female NPT.

Impeller:

- Semi-Open.

Installation depth:

- Max. 30 ft below water level.

Approvals:

- CSA-approved
- UL-listed.

Start level:

- 14".

Stop level:

- 7".

Minimum internal diameter of basin:

- 13".

Electrical data

Product number	Pump type	Cable length [ft]	Float switch	hp	Service factor	pH	Input voltage [V]	Max. power consumption [W]	Max. current [A]	Locked-rotor current [A]	Rated speed [rpm]
96001566	SU25	8	Yes	0.25	1.0	1	115	460	5.6	6.84	3000

Dimensional drawing

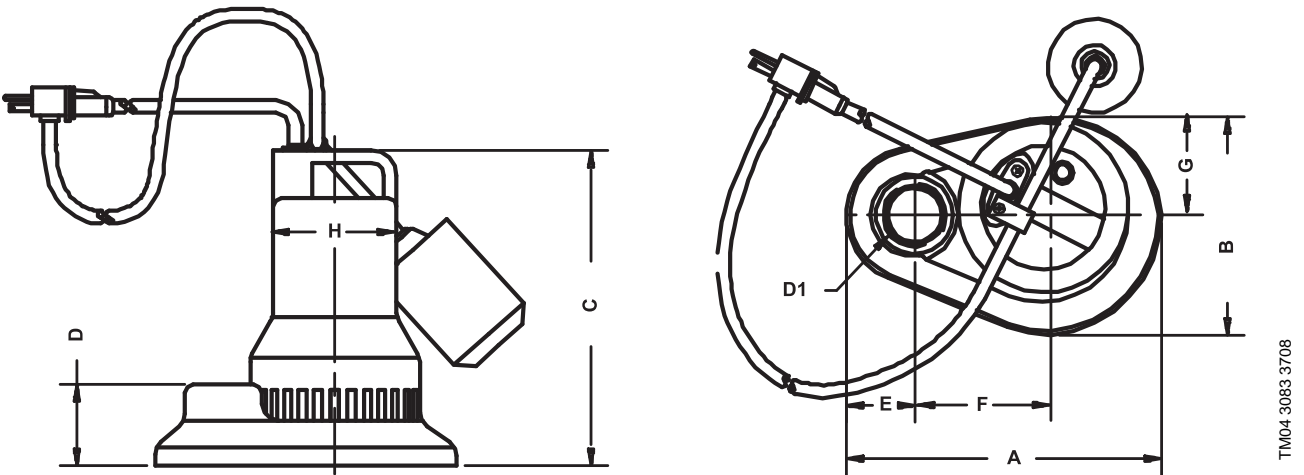


Fig. 48 Dimensional drawing

Dimensions and weight

Pump type	Motor data				D1 discharge port [inches]	Dimensions [inches]								Shipping weight [lbs]	Shipping volume [cu ft]
	hp	SF	pH	Volt		A	B	C	D	E	F	G	H		
SU25	0.25	1.0	1	115	1.5 NPT	9.25	6.375	9.25	2.375	2	4	2.875	3.625	7.1	0.52

Materials

Description	Material
Motor housing	Glass-reinforced thermoplastics
Volute	Glass-reinforced thermoplastics
Impeller	Glass-reinforced thermoplastics
Shaft	AISI 416 SS
Lip seal and O-rings	Buna N
Power cable	Neoprene, 3-prong, 8 ft
Interior of motor	Oil filled - Polyalphaolefin

Model 112, simplex

Demand Dose



Fig. 49 Model 112, simplex, control box

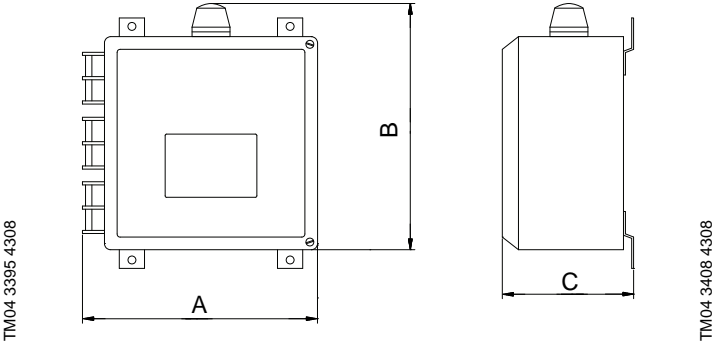


Fig. 50 Dimensional drawings

Technical data

Product number	Model	Full-load current [A]	Number of phases	Voltage [V]	Dimensions [inches]			Shipping weight [lbs]	Shipping volume [cu ft]
					A	B	C		
96900631	112	7 - 15	1	120/208/240	9.29	9.73	5.19	16	1.06

Description

Single-phase, simplex motor contactor and control panel.

The Model 112 control panel provides a reliable means of controlling one 120, 208, or 240 VAC single-phase pump in tanks, pump basins, irrigation systems and lifting stations.

Function

Two float switches activate a magnetic motor contactor to turn the pump on and off.

If an alarm condition occurs, an additional alarm float switch will activate the audio/visual alarm system.

Features

- The entire control system (panel and switches) is UL-listed to meet and/or exceed industry safety standards
- Dual safety certification for the United States and Canada
- Standard package includes three Sensor Float® float switches with 20 ft cables.
- Complete with step-by-step installation instructions
- Three-year limited warranty.

Model 122, duplex

Demand Dose



Fig. 51 Model 122, duplex, control box

TM04 3396 4308

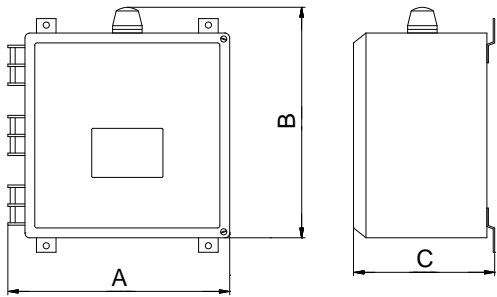


Fig. 52 Dimensional drawings

TM04 3402 4308

Technical data

Product number	Model	Full-load current [A]	Number of phases	Voltage [V]	Dimensions [inches]			Shipping weight [lbs]	Shipping volume [cu ft]
					A	B	C		
96900632	122	7 - 15	1	120/208/240	11 29	11.73	7.19	20	2.16

Description

Single-phase, duplex, alternating pump control panel with override.

The Model 122 control panel is designed to alternately control two 120, 208, or 240 VAC single-phase pumps in water and sewage installations.

Common applications include tanks, pump basins, irrigation systems and lifting stations.

Function

The alternating action equalizes pump wear. In addition to the alternating pump control, this system provides override control, should either pump fail).

If an alarm condition occurs, an alarm switch will activate the audio/visual alarm system.

Features

- The entire control system (panel and switches) is UL-listed to meet and/or exceed industry safety standards
- Dual safety certification for the United States and Canada
- Standard package includes three Sensor Float[®] float switches with 20 ft cables.
- Complete with step-by-step installation instructions
- Three-year limited warranty.

IFS 1, simplex

Timed dose



Fig. 53 IFS 1, simplex, control box

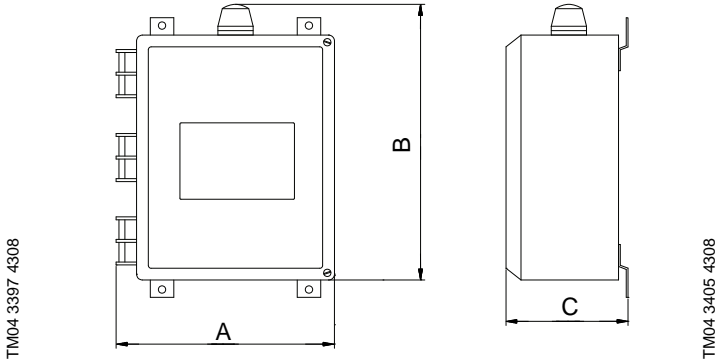


Fig. 54 Dimensional drawings

Technical data

Product number	Model	Full-load current [A]	Number of phases	Voltage [V]	Dimensions [inches]			Shipping weight [lbs]	Shipping volume [cu ft]
					A	B	C		
96900636	IFS1	7 - 15	1	120/208/240	9.29	11.73	5.19	20	2.16

Description

The Installer Friendly Series®, single-phase, simplex is a demand dose or timed dose, float controlled system.

The IFS simplex control panel is designed to control one 120, 208, 240 VAC single-phase pump in water and sewage installations.

Common applications include tanks, pump basins, irrigation systems and lifting stations.

The IFS control panel has an easy-to-use touch pad with display on the inner door for programming and system monitoring.

The panel configuration can be easily converted in the field to either a timed dose or demand dose control system.

Features

- The entire control system (panel and switches) is UL-listed to meet and/or exceed industry safety standards
- Dual safety certification for the United States and Canada
- Standard package includes:
Demand Dose three Sensor Float® float switches with 20 ft cables.
Timed Dose two Sensor Float® float switches with 20 ft cables.
- Complete with step-by-step installation instructions
- Three-year limited warranty.

IFS 1, duplex

Timed dose



Fig. 55 IFS 1, duplex, control box

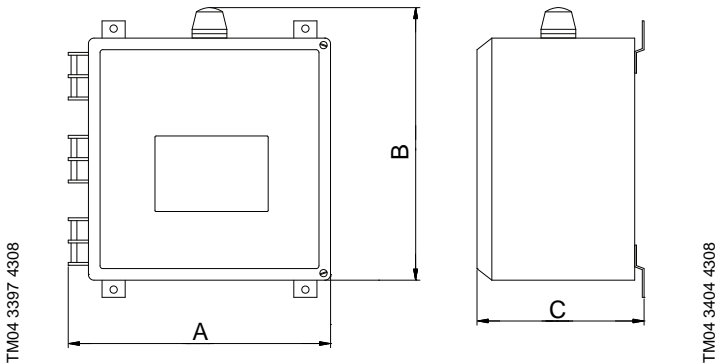


Fig. 56 Dimensional drawings

Technical data

Product number	Model	Full-load current [A]	Number of phases	Voltage [V]	Dimensions [inches]			Shipping weight [lbs]	Shipping volume [cu ft]
					A	B	C		
96900637	IFS1	7 - 15	1	120/208/240	11.29	11.73	7.19	20	2.16

Description

The Installer Friendly Series®, single-phase, duplex is a demand dose or timed dose, float controlled system.

The IFS duplex control panel is designed to control two (alternating) 120, 208, 240 VAC single-phase pumps in water and sewage installations.

Common applications include tanks, pump basins, irrigation systems and lifting stations.

The IFS control panel has an easy-to-use touch pad with display on the inner door for programming and system monitoring.

The panel configuration can be easily converted in the field to either a timed dose or demand dose control system.

Features

- The entire control system (panel and switches) is UL-listed to meet and/or exceed industry safety standards
- Dual safety certification for the United States and Canada
- Standard package includes:
Demand Dose three Sensor Float® float switches with 20 ft cables.
Timed Dose thwo Sensor Float® float switches with 20 ft cables.
- Complete with step-by-step installation instructions
- Three-year limited warranty.

Tank Alert® I



Fig. 57 Tank Alert® I control box

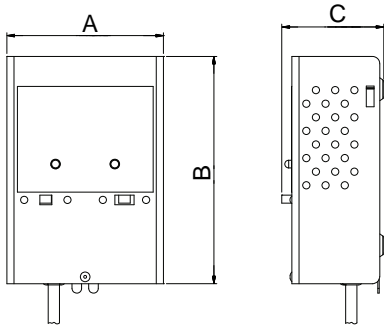


Fig. 58 Dimensional drawings

Technical data

Product number	Model	Full-load current [A]	Number of phases	Voltage [V]	Dimensions [inches]			Shipping weight [lbs]	Shipping volume [cu ft]
					A	B	C		
96001042	TA1	5.0	1	120	4.07	6.16	2.66	4	0.15

Description

Tank Alert® I is an asy-to-install, liquid level alarm system for indoor use.

This alarm system monitors liquid levels in lifting stations, pump basins, sewage tanks, agricultural storage tanks, and other non-potable water applications.

Function

The Tank Alert® I alarm system can serve as a high- or low-level alarm depending on the float switch model used.

The alarm horn will sound when a critically high liquid level occurs. The horn can be turned off, but the warning light will remain on until the condition has been remedied.

A green "power on" light indicates power to the alarm panel.

Features

- NEMA 1 enclosure, designed for easy installation, rated for indoor use.
- Red "WARNING LIGHT", green "POWER ON" light, alarm "TEST" switch, and "HORN SILENCE" switch.
- Alarm horn will sound at 86 dB at 10 ft (3 m) distance.
- Can be used with any UL-listed/-recognized switching mechanism rated to include 1 Amp, 12 VAC load.
- Alarm system (when installed on a separate circuit) operating even if the power to the pump fails.
- Complete package includes standard Sensor Float® float switch with 15 ft (4.57 m) cable and mounting clamp. Other cable lengths are available.
- Switching mechanism operates on low voltage and is isolated from the power line to reduce the risk of shock.
- UL-listed.
- CSA-certified.
- Three-year limited warranty.

Tank Alert® 4X



Fig. 59 Tank Alert® 4X, control box

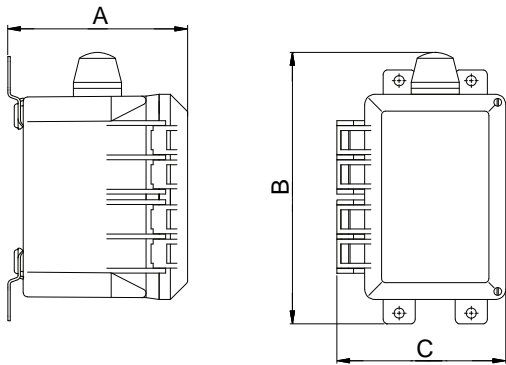


Fig. 60 Dimensional drawings

Technical data

Product number	Model	Full-load current [A]	Number of phases	Voltage [V]	Dimensions [inches]			Shipping weight [lbs]	Shipping volume [cu ft]
					A	B	C		
96001043	TA4X	5.0	1	120	5.61	8.47	5.27	4	0.15

Description

Tank Alert® 4X is an asy-to-install liquid level alarm system which has a NEMA 4X enclosure for indoor or outdoor use.

This alarm system monitors liquid levels in lifting stations, pump basins, sewage tanks, agricultural storage tanks, and other non-potable water applications.

Function

The Tank Alert® 4X alarm system can serve as a high- or low-level alarm depending on the float switch model used.

The stainless steel alarm horn will sound and the red beacon will illuminate when a critically high liquid level occurs.

Features

- NEMA 4X enclosure rated for indoor or outdoor use.
- Automatic alarm reset and alarm test/normal/silence switch.
- Alarm system (when installed on separate circuit) operating even if the power to the pump fails.
- Complete package includes standard Sensor Float® float switch with 15 ft (4.57 m) cable and mounting clamp. Other cable lengths are available.
- UL/CUL-listed.
- Three-year limited warranty.

Tank Alert® AB



Fig. 61 Tank Alert® AB, control box

TM04 3398 4308

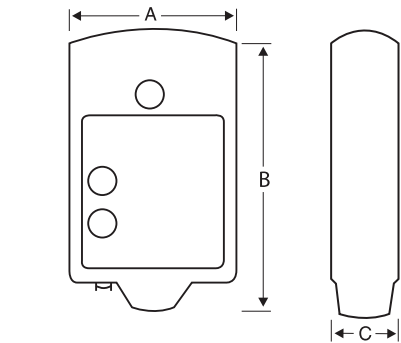


Fig. 62 Dimensional drawings

TM04 3406 4308

Technical data

Product number	Model	Full-load current [A]	Number of phases	Voltage [V]	Dimensions [inches]			Shipping weight [lbs]	Shipping volume [cu ft]
					A	B	C		
96901182	TAAB	2.4	1	120	4.05	6.86	2.37	4	0.15

Description

Tank Alert® AB is an asy-to-install liquid level alarm system with auto-reset and battery backup features for indoor use.

This alarm system monitors liquid levels in lifting stations, pump basins, sewage tanks, agricultural storage tanks???, and other non-potable water applications.

Function

The Tank Alert® AB alarm system can serve as a high- or low-level alarm depending on the float switch model used.

The alarm horn will sound when a critically high liquid level occurs. The horn can be turned off, but the alarm light will remain on until the condition has been remedied. Once the condition is cleared, the alarm will automatically reset.

A green "POWER ON" light indicates 120 VAC primary power to the alarm. Low-battery chirp function will indicate when battery should be replaced.

Features

- NEMA 1 enclosure, designed for easy installation, rated for indoor use.
- Automatic alarm reset.
- Red "ALARM" light and green "POWER ON" light, alarm "TEST" switch, and horn "SILENCE" switch.
- Alarm horn will sound at 87 dB at 10 ft (3 m) distance.
- Can be used with any UL-listed/-recognized switching mechanism rated to include 1 Amp, 9 VDC load.
- If primary power fails, the alarm system will continue functioning due to battery backup feature. (Battery not included.)
- Complete package includes standard SJE Signal-Master® float switch with 15 ft (4.57 m) cable and mounting clamp. Other cable lengths are available.
- Switching mechanism operates on low voltage and is isolated from the power to the pump to reduce the risk of shock.
- Low battery chirp.
- Easy access battery compartment.
- External terminal block for easy float switch installation.
- CSA-certified.
- UL-listed.
- Three-year limited warranty.

Mechanical float switches

For Unilift Series

Description	Horsepower	Voltage [V]	Cable length [ft]	Fits pump model	Product number
Wide angle, piggyback connection	0.25-0.5	115	10	KP, AP and AP-B	96001059
Wide angle, piggyback connection	0.25-0.5	115	25	KP, AP and AP-B	96901187
Wide angle, without plug	0.8-1.5	230	10	AP and AP-B	96001062
Wide angle, without plug	0.8-1.5	230	25	AP and AP-B	96901188

For EF, SE Series

Description	Horsepower	Voltage [V]	Cable length [ft]	Fits pump model	Product number
Wide angle, piggyback connection	0.25-0.5	115	10	SE 40, 50, 75, 100, 150 EF 33, 50, 75, 100, 150 EF33E	96001621
Wide angle, piggyback connection	0.25-0.5	115	20		96001624
Wide angle, without plug	0.25-1.0	230	10		96001622
Wide angle, without plug	0.25-1.0	230	20		96001625
Wide angle, without plug	1.5	230	10		96001623
Wide angle, without plug	1.5	230	20		96001626

For Series 25

Description	Horsepower	Voltage [V]	Cable length [ft]	Fits pump model	Product number
Wide angle, piggyback connection	0.25	115	10	SU 25 and EF 25	96001643

Basins

Ejector basins

Size DxH [inches]	Material	Product number
18 x 30	Polypropylene	96742101
24 x 36	Polyethylene	96001005
30 x 36	Fiberglass	96001006
36 x 36	Fiberglass	96001007

Basin hubs and fittings

Material	Product number
3-inch, cast iron, caulking inlet hub with four 0.313" mounting holes	96001507
4-inch, cast iron, caulking inlet hub with four 0.313" mounting holes	96001508
6-inch, cast iron, caulking inlet hub with four 0.313" mounting holes	96001509
4-inch, cast iron, flat inlet hub with four 0.313" mounting holes	96001510
3-inch, pipe gasket for tank sidewall mounting	96001504
4-inch, pipe gasket for tank sidewall mounting	96001505
6-inch, pipe gasket for tank sidewall mounting	96001506

Basin covers

Size, diameter [inches]	Discharge x vent [inches]	Type	Material	Product number
18	2 x 2	Simplex	Steel	96001008
18	2 x 3	Simplex	Steel	96001009
18	2 x 2	Simplex	Steel/split	91122139
18	2 x 3	Simplex	Steel/split	91122140
24	2 x 2	Simplex	Steel	96001012
24	2 x 3	Simplex	Steel	96001013
30	2 x 2	Simplex	Steel	96001016
30	2 x 3	Simplex	Steel	96001017
30	2 x 2	Duplex	Steel	96001020
30	2 x 3	Duplex	Steel	96001021
36	2 x 2	Simplex	Steel	96001024
36	2 x 3	Simplex	Steel	96001025
36	2 x 2	Duplex	Steel	96001028
36	2 x 3	Duplex	Steel	96001029

Screw and gasket kits for basin covers

Contents of kits		Remarks	Product number	To be used with basin cover, product number
<ul style="list-style-type: none">• (2) 2" Adaptaflex fittings• (1) rubber plug (electric)• (8) 0.25" x 1.25" lag screws	<ul style="list-style-type: none">• (8) 0.25" flat washers• (1) roll of gasket material• (1) 4" Adaptaflex/inlet	New eight-screw design	96742102	96001008
<ul style="list-style-type: none">• (1) 2" Adaptaflex fitting• (1) 3" Adaptaflex fitting• (1) rubber plug (electric)• (8) 0.25" x 1.25" lag screws	<ul style="list-style-type: none">• (8) 0.25" flat washers• (1) roll of gasket material• (1) 4" Adaptaflex/inlet	New eight-screw design	96742103	96001009
<ul style="list-style-type: none">• (1) rubber electric plug• (1) 2.5" O-ring seal• (6) 0.375" x 1.5" screws	<ul style="list-style-type: none">• (6) flat washers• (1) 0.125" x 0.5" gasket tape• (1) 0.125" x 1" gasket tape		96001014	96001012, 96001013, 96001016, 96001017, 96001024, 96001025
<ul style="list-style-type: none">• (2) rubber electric plugs• (2) 2.5" O-ring seals• (6) 0.375" x 1.5" screws	<ul style="list-style-type: none">• (6) flat washers• (2) 0.125" x 0.5" gasket tape• (1) 0.125" x 1" gasket tape		96001015	96001020, 96001021, 96001028, 96001029

Swing check valves

Description	Product number
PVC 1.5", w/compression fittings, 7.5" body length	96001644
PVC 2", w/compression fittings, 9.75" body length	96001645
PVC 2", w/compression fittings, 9.75" body length	96001049
PVC 3", w/compression fittings, 14" body length	96001050
PVC 1.5", w/solvent fittings, 5.75" body length	96001046
PVC 2", w/solvent fittings, 6" body length	96001047

Junction box

Description	Product number
NEMA 4X	96001051

Pump and system sizing instructions

The information needed and steps required to properly size a wastewater pump and pumping system are listed below:

1. System capacity (GPM required)
2. Total dynamic head
3. Size of solids
4. Pump selection
5. Basin size
6. Simplex or duplex system

The following pages explain how this information is obtained and used to properly size the pump and pumping system.

1. System capacity

System capacity is calculated in US gallons per minute (GPM).

The best method to determine this figure is through the "Fixture unit" method. Proceed in this way:


A. Count the water fixtures (faucets, showers, water closets and other draw-off points) in the building and their unit values as shown in the chart on page 5.

B. Refer to the graph below to determine GPM.

Note: It must also be determined if there is a liquid velocity of at least 2 ft per second through the pipe to carry the solids without clogging. This is ensured if the flow rate is at least:

9	GPM	through a	1.25" pipe
13	GPM	through a	1.5" pipe
21	GPM	through a	2" pipe
30	GPM	through a	2.5" pipe
46	GPM	through a	3" pipe
MINIMUM FLOW RATE REQUIRED			

System capacity based on total value of fixture units

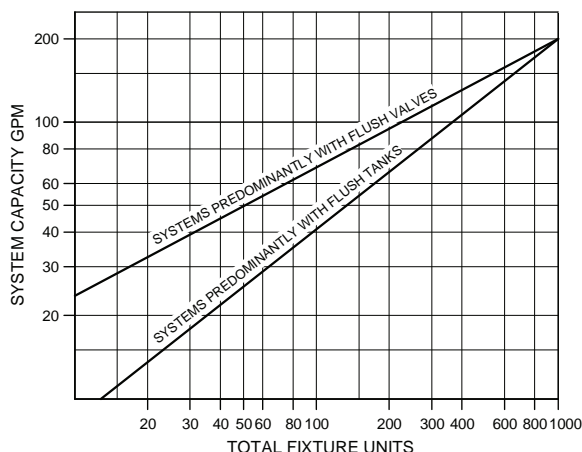

TM04 2425 2508

Pump and system sizing instructions

Unilift CC, KP, AP

Fixture unit values

Fixture unit	Qty.	Total	
Bathroom group: Wash basin, bathtub or shower and (direct flush) water closet	8		
Bathroom group: Wash basin, bathtub or shower and (flush tank) water closet	6		
Bathtub with 1.5" trap	2		
Bathtub with 2" trap	3		
Bidet with 1.5" trap	3		
Dental unit or cuspidor	1		
Drinking fountain	1/2		
Dishwasher (non-commercial)	2		
Kitchen sink, domestic	2		
Kitchen sink, domestic with garbage disposal	3		
Wash basin with 1.5" plug	1		
Wash basin (barber or beauty shop)	2		
Laundry tray, two-compartment	2		
Shower stall	2		
Shower (group) per head	3		
Sink (direct flush valve)	8		
Sink (service type with floor drain)	3		
Sink (scullery)	4		
Sink, surgery	3		
Urinal (with flush valve)	8		
Urinal (with flush tank)	4		
Water closet (with flush valve)	8		
Water closet (with flush tank)	4		
Swimming pool (per 1000 gal capacity)	1		
Water softener (domestic)	1		
Washing machine	2		
Unlisted fixture with 1.25" trap size	3		
Unlisted fixture with 1.5" trap size	4		
Unlisted fixture with 2" trap size	5		
Unlisted fixture with 2.5" trap size	6		
Unlisted fixture with 3" trap size	4		
Unlisted fixture with 4" trap size	2		
		Total fixture units =	


2. Total dynamic head

Dynamic head is expressed in feet of head (ft H₂O).

Total dynamic head is a combination of static head and friction loss:

A. Static head

The actual vertical distance of "lift" in feet from the minimum water level in the basin to the highest point in the discharge piping.

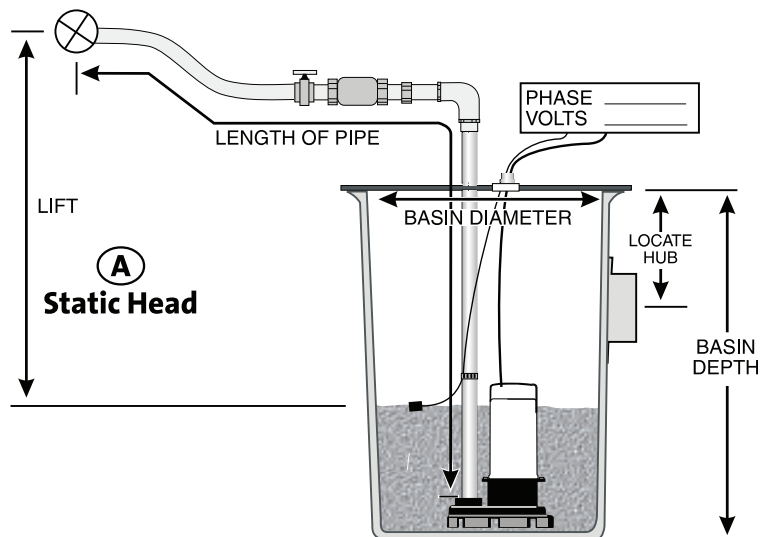

Tm 043425 4408

Fig. 63 Illustration of static head for an ejector basin with pump and piping

B. Friction loss

Friction losses are caused by pumping the solids/liquids through the various piping and fittings.

Every foot of pipe and every valve or fitting is rated for various friction losses at a given rate of capacity (GPM).

Use the figure above and the friction loss tables below to determine the friction loss.

Table A

Friction losses for fittings (equivalent feet of piping):

Nominal pipe diameter	90° elbow	45° elbow	Tee (through-flow)	Tee (branch-flow)	Swing check valve	Gate valve (open)
1.25"	3.5	1.8	2.3	6.9	11.5	0.9
1.5"	4.0	2.2	2.7	8.1	13.4	1.1
2"	5.2	2.8	3.5	10.3	17.2	1.4
2.5"	6.2	3.3	4.1	12.3	20.6	1.7
3"	7.7	4.1	5.1	15.3	25.5	2.0

Pump and system sizing instructions

Unilift CC, KP, AP

Table B

Friction losses for pipes (per 100 feet of piping):

GPM	1.25" diameter		1.5" diameter		2" diameter		2.5" diameter		3" diameter	
	Plastic	Steel*	Plastic	Steel*	Plastic	Steel*	Plastic	Steel*	Plastic	Steel*
4	0.34	0.35								
6	0.71	0.72	0.33							
8	1.19	1.2	.056	0.57						
10	1.78	1.74	0.83	0.85						
12	2.48	2.45	1.16	1.18	0.34	0.35				
14	3.29	3.24	1.54	1.51	0.45	0.46				
16	4.21	4.15	1.97	1.93	0.58	0.59				
18	5.25	5.17	2.41	2.40	0.72	0.73				
20	6.42	6.31	2.96	2.92	0.88	0.88				
25	10.39	9.61	4.80	4.80	1.38	1.39				
30	13.60	13.00	6.27	6.23	1.81	1.82	0.75	0.77		
35	19.20	18.20	8.82	8.82	2.40	2.40	1.01	0.99		
40			10.70	10.80	3.12	3.10	1.28	1.30		
45			14.00	14.00	3.80	3.80	1.50	1.60	0.55	0.56
50			16.50	16.50	4.70	4.70	1.90	1.90	0.66	0.68
60					6.50	6.60	2.70	2.70	0.94	0.91
70					8.60	8.80	3.70	3.60	1.20	1.20
80					11.10	11.40	4.70	4.60	1.60	1.60
90					13.80	14.30	5.80	5.80	2.00	2.00
100					16.80	17.50	7.10	7.10	2.40	2.40
125							10.90	10.90	3.70	3.60
150							15.90	15.90	5.20	5.10
175									6.90	6.90

* Steel piping based on Schedule 40 pipe.

Friction loss worksheet

Fittings		
Diameter of fittings _____	From table "A"	Equals this pipe length
# of 90° elbows _____	x Each _____	= _____ ft
# of 45° elbows _____	x Each _____	= _____ ft
# of through-flow tees _____	x Each _____	= _____ ft
# of branch-flow tees _____	x Each _____	= _____ ft
# of swing check valves _____	x Each _____	= _____ ft
# of gate valves _____	x Each _____	= _____ ft
	Feet of pipe equivalent	_____ ft
Piping:		+
Diameter of pipe _____	Feet of pipe actual	_____ ft
	Total feet of pipe	= _____ ft
	Friction loss (from table "B")	<input type="text"/>

Static head	_____	feet
Friction loss	_____ + _____	feet
Total dynamic head calculated =	_____	feet

3. Size of solids

If the building has a water closet of any kind, it will pass 2" solids and require a sewage pump. If it does not have a water closet, it will only need to pass at least 0.75" or smaller solids, and will require an effluent pump.

4. Pump selection

Proceed as follows:

- Go back to steps 1, 2 and 3 and find this information:
 - capacity (GPM)
 - total dynamic head required
 - solids handling requirements.
- refer to the pump performance curves
- find the best pump for the application
- select the smallest pump that meets the capacity and head requirements and can pass the required solids size. (See performance curves in this product guide).

5. Basin size

To determine the proper basin size, refer to the required capacity of the system. Convert this to the volume the pump must be able to pump out of the basin during each cycle ("pumpable volume", see figure below) using this formula:

GPM x run time = volume

The run time must be at least two minutes to ensure against short cycling (which would greatly reduce the service life of the pump). Therefore, if the flow rate is 50 GPM, the pumpable volume required in the basin must be 100 gallons.

GPM	x	run time [mins.]	=	volume [gals]
50	x	2	=	100

Referring to the figure below and the table on the following page, select a basin diameter and float switch free cable length that will guarantee a sufficient pumpable volume. Make sure that these requirements are fulfilled:

- The basin must be deep and wide enough to allow space for the ON/OFF range of the float switch to move freely.
- The bottom of the basin inlet must be at least 24" above the bottom of the basin.
- See descriptions of the individual pumps for water level required above the pump (submergence).

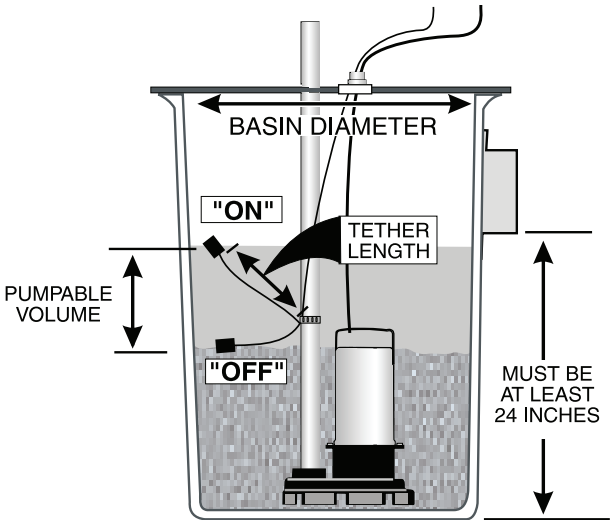


Fig. 64 Schematic drawing of ejector basin with pump, piping and float switch

TM 043426 4408

Pump and system sizing instructions

Unilift CC, KP, AP

Approximate pumpable volume (in gallons) for various combinations of basin diameter and float switch free cable lengths.

Free cable length of float switch [inches]											
OFF	3.5	6	8	10	12	14	16	18	20	22	24
ON	5.5	10	12	16	18	22	25	28	30	32	36
Basin diameter	Approximate pumpable volume [gallons]										
18"	6	11	13	17	20						
24"	11	20	23	29	35	41	47				
30"	17	31	37	46	55	64	73				
36"	24	44	53	66	79	93	106	123	132	145	159
48"	43	78	94	117	141	164	188	219	235	258	282
60"	67	122	147	184	220	257	294	343	367	404	440
72"	97	176	211	264	317	370	423	493	529	581	634

The values are approximate only. Volume may differ slightly due to basin construction.

6. Simplex or duplex System

Local plumbing codes will often determine whether a wastewater pumping system must be duplex (two pumps), or whether a simplex system (one pump) is sufficient. Most commercial applications are of the duplex type, however - not necessarily for the increased capacity offered by two pumps, but more for the standby safety factor that many municipalities require (public health concerns). In most residential installations, a simplex system is adequate - but be sure to check the local plumbing codes.

Additional information on pipe volume and flow velocity:

Storage of water in pipes of various sizes

Pipe size [inches]	Volume [gallons per foot]	Pipe size [inches]	Volume [gallons per foot]
1.25	0.06	6	1.4
1.25	0.09	8	2.6
2	0.16	10	4.07
3	0.36	12	5.87
4	0.652		

Minimum flow rate to maintain 2ft/sec* flow velocity in various pipes

Pipe size [inches]	Minimum flow rate [GPM]	Pipe size [inches]	Minimum flow rate [GPM]
1.25	9	6	180
1.25	13	8	325
2	21	10	500
3	46	12	700
4	80		

* Failure to maintain or exceed this flow velocity will result in clogged pipes. Information is based on Schedule 40 nominal pipe.

WebCAPS




WebCAPS is a **Web-based Computer Aided Product Selection** program available on www.grundfos.com.

WebCAPS contains detailed information on more than 185,000 Grundfos products in more than 20 languages.

In WebCAPS, all information is divided into 6 sections:

- Catalogue
- Literature
- Service
- Sizing
- Replacement
- CAD drawings.

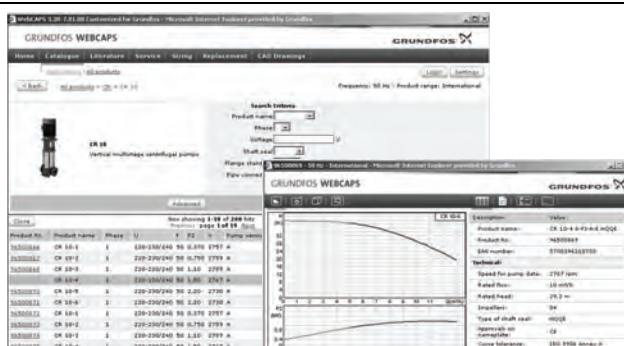

Catalogue

This section is based on fields of application and pump types, and contains

- technical data
- curves (QH, Eta, P1, P2, etc) which can be adapted to the density and viscosity of the pumped liquid and show the number of pumps in operation
- product photos
- dimensional drawings
- wiring diagrams
- quotation texts, etc.



Literature

In this section you can access all the latest documents of a given pump, such as

- data booklets
- installation and operating instructions
- service documentation, such as Service kit catalogue and Service kit instructions
- quick guides
- product brochures, etc.



Service

This section contains an easy-to-use interactive service catalogue. Here you can find and identify service parts of both existing and discontinued Grundfos pumps. Furthermore, this section contains service videos showing you how to replace service parts.



Sizing

This section is based on different fields of application and installation examples, and gives easy step-by-step instructions in how to

- select the most suitable and efficient pump for your installation
- carry out advanced calculations based on energy consumption, payback periods, load profiles, life cycle costs, etc.
- analyse your selected pump via the built-in life cycle cost tool
- determine the flow velocity in wastewater applications, etc.



Replacement

In this section you find a guide to selecting and comparing replacement data of an installed pump in order to replace the pump with a more efficient Grundfos pump. The section contains replacement data of a wide range of pumps produced by other manufacturers than Grundfos.

Based on an easy step-by-step guide, you can compare Grundfos pumps with the one you have installed on your site. When you have specified the installed pump, the guide will suggest a number of Grundfos pumps which can improve both comfort and efficiency.



CAD drawings

In this section it is possible to download 2-dimensional (2D) and 3-dimensional (3D) CAD drawings of most Grundfos pumps.

These formats are available in WebCAPS:

2-dimensional drawings:

- .dxf, wireframe drawings
- .dwg, wireframe drawings.

3-dimensional drawings:

- .dwg, wireframe drawings (without surfaces)
- .stp, solid drawings (with surfaces)
- .eprt, E-drawings.

WinCAPS



Fig. 65 WinCAPS CD-ROM

WinCAPS is a **Windows-based Computer Aided Product Selection** program containing detailed information on more than 185,000 Grundfos products in more than 20 languages.

The program contains the same features and functions as WebCAPS, but is an ideal solution if no Internet connection is available.

WinCAPS is available on CD-ROM and updated once a year.

L-UNI-PG-01 0309	US
New 0309	
96900036 0109	

Subject to alterations.

GRUNDFOS Pumps Corporation
17100 West 118th Terrace
Olathe, Kansas 66061
Phone: +1-913-227-3400
Telefax: +1-913-227-3500

www.grundfos.com

GRUNDFOS Canada Inc.
2941 Brighton Road
Oakville, Ontario L6H 6C9 Canada
Phone: +1-905 829 9533
Telefax: +1-905 829 9512

Bombas GRUNDFOS de Mexico S.A. de C.V.
Boulevard TLC No. 15
Parque Industrial Stiva Aeropuerto
Apodaca, N.L. Mexico 66600
Phone: +52-81-8144 4000
Telefax: +52-81-8144 4010

GRUNDFOS 