

SPECIFICATION SHEET



LEAD FREE*

Series LF860

Lead Free* Reduced Pressure Zone Assemblies

Size: 1/2" - 2" (15mm - 50mm)

The FEBCO Series LF860 Reduced Pressure Zone Assemblies are designed for use in health-hazard applications. The LF860S features Lead Free* construction to comply with low lead installation requirements. End Connections – NPT ANSI / ASME B1.20.1 The Lead Free* Reduced Pressure Zone Assemblies shall comply with state codes and standards, where applicable, requiring reduced lead content.

Pressure – Temperature

Max. Working Pressure: 175psi (12.1 bar)
Hydrostatic Test Pressure: 350psi (24.1 bar)
Temperature Range: 32°F to 140°F (0°C to 60°C)

Materials

Valve Body: Lead Free* Bronze
Elastomers: Silicone
Springs: Stainless Steel

Models

- LF860 - Standard Assembly with Ball Valves
- LF860U - Standard Assembly with Union Ball Valves


Approvals – Standards

- ANSI/AWWA Conformance (C511)
- Approved by the Foundation for Cross-Connection Control and Hydraulic Research at the University of Southern California.




Typical Installation

Series LF860 1/2" - 2" (15 - 50mm) Outdoor Installation






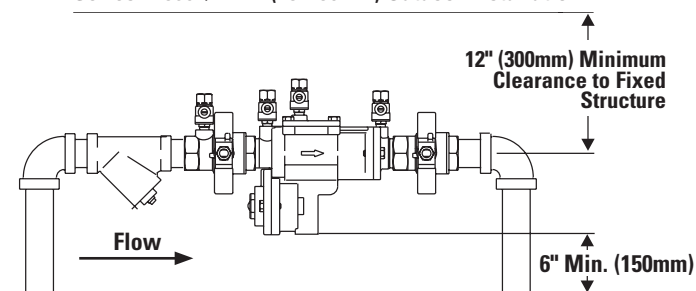


IMPORTANT: INQUIRE WITH GOVERNING AUTHORITIES FOR LOCAL INSTALLATION REQUIREMENTS

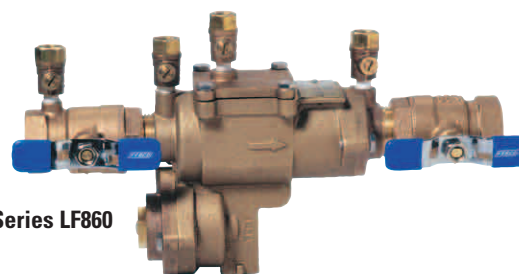

Series LF860

Capacity

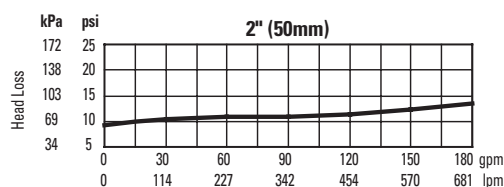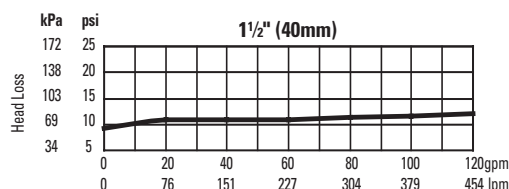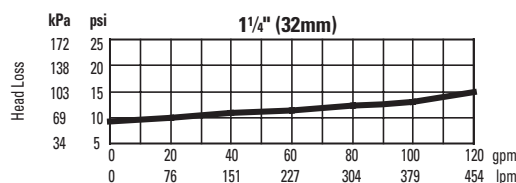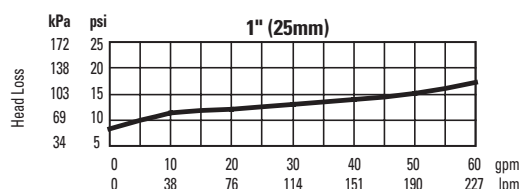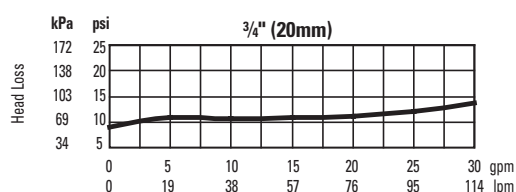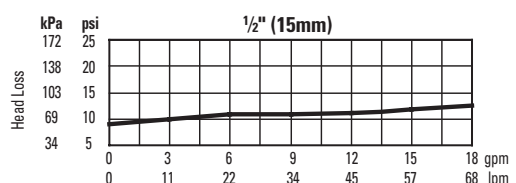

Job Name _____

Job Location _____

Engineer _____

Approval _____

Contractor _____


Approval _____

Contractor's P.O. No. _____


Representative _____

FEBCO product specifications in U.S. customary units and metric are approximate and are provided for reference only. For precise measurements, please contact FEBCO. FEBCO reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on FEBCO products previously or subsequently sold.


Series LF860 / Size: ½" - 2" (15mm - 50mm)

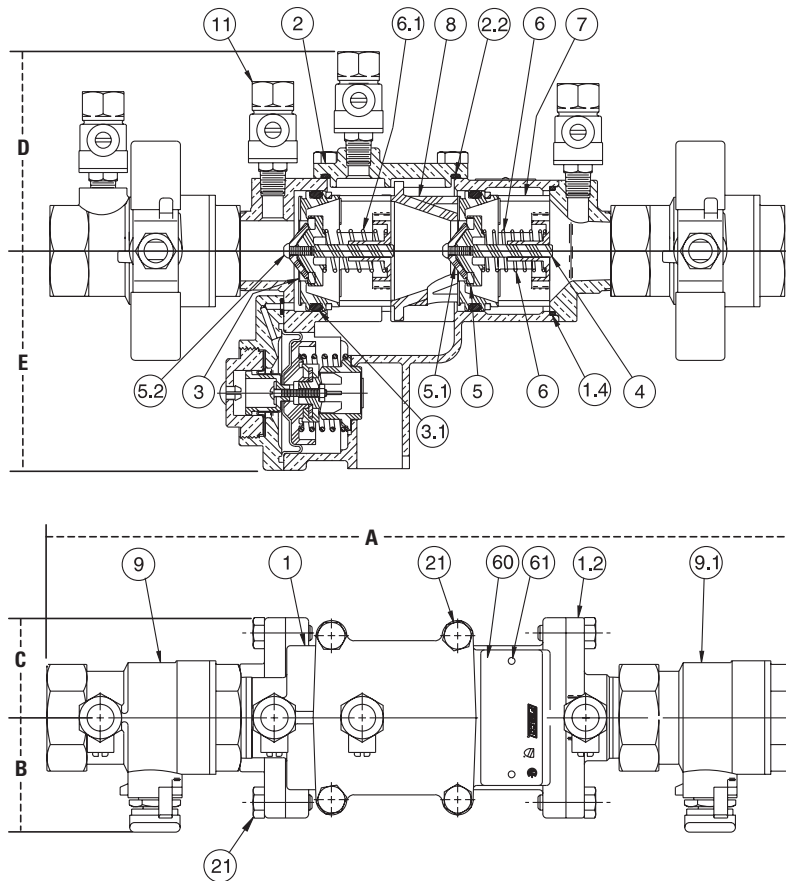

Relief Valve Assembly

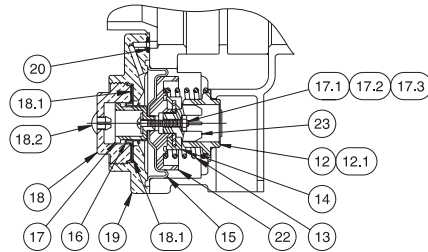

Check Assembly



ITEM	DESCRIPTION	MATERIALS
1	Body	Lead Free* Bronze
1.2	Tailpiece	Bronze
1.4	O-Ring	Silicone
2	Cover	Bronze
2.2	O-Ring	Silicone
3	Seat	Noryl®
3.1	O-Ring	Silicone
4	Poppet	Noryl®
5	Seat Disc	Silicone Rubber
5.1	Disc Retainer	Noryl®
5.2	Rnd HD Screw	Phillips, 18-8 SS
6	Spring	SS
6.1	Spring	SS
7	Guide	Noryl®
8	Retainer Spacer	Noryl®
9	Ball Valve (w/tap)	Lead Free* Bronze
9.1	Ball Valve	Lead Free* Bronze
11	Test Cock	Lead Free* Bronze
12	Seat Ring-RV	Noryl®
12.1	Gasket Ring-RV	Silicone Rubber
13	Spring-RV	SS
14	Seat Disc-RV	Silicone Rubber/SS
15	Diaphragm-RV	Rubber/Fabric
16	Outer Diaphragm-RV	Rubber/Fabric
17	Small Piston-RV	Noryl®
17.1	Rnd HD Screw	Phillips, 18-8 SS
17.2	Washer	18-8 SS
17.3	Hex Nut	18-8 SS
18	Cylinder-RV	Lead Free* Brass
18.1	Slip Ring-Cylinder	Acetal
18.2	Slide (Plug)	Nylon
19	Cover-RV	Lead Free* Bronze
20	O-Ring	Silicone
21	Hex HD Capscrew	18-8 SS
22	Large Piston-RV	Noryl®
23	Guide-RV	Noryl®
60	Identification Plate	Brass
61	Drive Screw Stick	SS

Note: The gap drain is not designed to catch the maximum discharge possible from the relief valve. The installation of FEBCO air gap with the drain line terminating above a floor drain will handle any normal discharge or nuisance spitting through the relief valve. However, floor drain size may need to be designed to prevent water damage caused by a catastrophic failure condition. Do not reduce the size of the drain line from the air gap fitting.

Dimensions – Weights

Size: ½" - 2" (15 - 50mm)

SIZE (DN)		DIMENSIONS										WEIGHT	
		A		B		C		D		E			
in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	lbs.	kgs.
½	15	10	254	1½	38	1½	38	3⅞	79	3½	89	5.6	2.5
¾	20	10¾	273	1½	38	1½	38	3⅞	79	3½	89	5.8	2.6
1	25	12½	318	1⅞	48	1⅞	41	3⅞	86	3⅞	92	9.2	4.2
1¼	32	15⅞	403	3	76	2½	64	4¼	108	5⅞	143	20.2	9.2
1½	40	16⅞	416	3	76	2½	64	4¼	108	5⅞	143	20.6	9.4
2	50	17⅞	450	3½	89	2½	64	4¼	108	5⅞	143	24.8	11.3

Note: Dimensions are nominal. Allowances must be made for normal manufacturing tolerances.



A Watts Water Technologies Company



**ISO 9001-2008
CERTIFIED**

USA: Fresno, CA • Tel: (559) 441-5300 • Fax: (559) 441-5301 • www.FEBCOonline.com
Canada: Burlington, ON • Tel: (905) 332-4090 • Fax: (905) 332-7068 • www.FEBCOonline.ca