



WEIL-McLAIN

Item# WMB-155C
AquaBalance
Gas Combination boiler




STANDARD EQUIPMENT:

- Stainless steel primary heat exchanger
- Mounting bracket and hardware
- Spark Ignition
- Outdoor sensor
- Honeywell control
- T&P gauge
- 3-prong power cord
- Water treatment inhibitor and test kit
- Condensate drain
- Relief valve
- 3-in-1 vent adaptor Low NOx SCAQMD compliant
- DHW flat plate heat exchanger
- 3-speed circulator
- Vent Material - PVC, CPVC, PP, SS

MODEL	Input MBH		AHRI Certified Ratings			Vent Diam. (inches)	Boiler water content gallons
	Max.	Min.	DOE Heating Capacity MBH	Seasonal Efficiency AFUE %	Net Water rating MBH		
WMB-155C	155	15.5	143	94.4	124	3	.75

NOW STOCKED IN THE CDC

Engineering the ideal AquaBalance of comfort

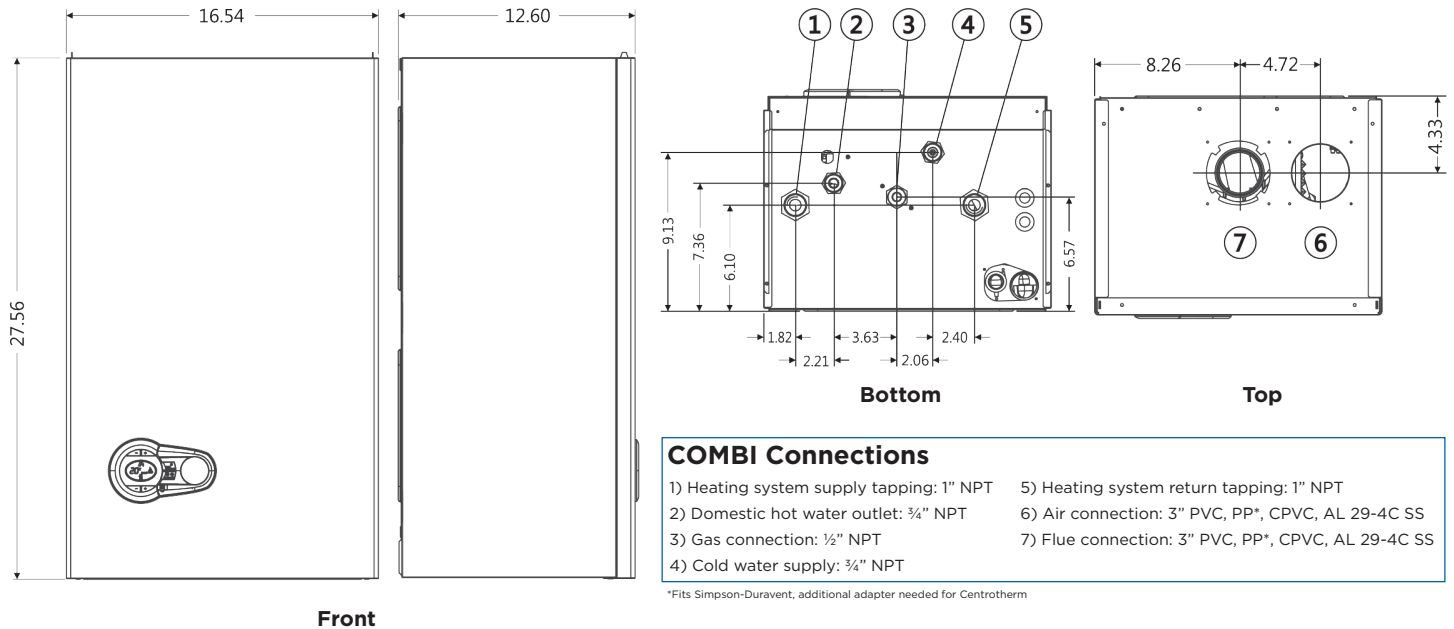

Model ¹	Input MBH		AHRI Certified Ratings				Vent outlet diameter (Inches) ⁴	Vent material	Boiler water content (Gallons)	Approx. shipping weight (Lbs.)
	Max.	Min.	DOE heating capacity MBH ²	Seasonal efficiency AFUE %	Net water rating MBH ³					
WMB-155C	155	15.5	143	94.4	124	3	PVC, CPVC, PP, SS	.75	87	

¹Natural gas field convertible to LP with optional kit.

²Based on standard test procedures prescribed by the United States Department of Energy. MBH refers to thousands of Btu per hour.

³Net AHRI ratings are based on net installed radiation of sufficient quantity for the requirement of the building and nothing needs to be added for normal piping and pick-

up. Ratings are based on piping and pick-up allowance of 1.15. An additional allowance should be made for unusual piping and pick-up loads.

⁴Boilers must be vented directly to the outdoors. See boiler manuals for details.

In the interest of continual improvement in product and performance, Weil-McLain reserves the right to change specifications without notice.

STANDARD EQUIPMENT:

- Factory tested
- Stainless Steel primary heat exchanger
- Mounting bracket and hardware
- Spark ignition
- Outdoor sensor
- Honeywell control
- T & P gauge
- 3-prong power cord
- Water treatment inhibitor and test kit
- Condensate drain
- Relief valve
- 3-in-1 Vent adapter
- Low NOx SCAQMD compliant
- DHW flat plate heat exchanger
- 3-speed circulator

OPTIONAL EQUIPMENT:

- Propane conversion kit
- Concentric vent kit
- Condensate neutralizer

