

***PEX Stapler is faster than any other layout method\****



# For Wood and Foamboard

*\*Compare to Mangone and Watts Radiant brands. Model PWS1 Stapler easily secures 3/8, 1/2 or 5/8-in (9.5, 12.7 or 15.9 mm) PEX (polyethylene cross-linked tubing) to a wooden sub-floor or foamboard base used with in-floor radiant heating installations:*

## **PORTABLE, MANUAL STAPLER WITH CONTINUOUS-FEED MAGAZINE**

- Operates From A Standing Position . An exclusive Malco feature for PEX-TO-WOOD applications.
- Easy-Loading, Easy Feeding Strips of 25 Staples
- Lightweight, One-Piece Polymer Slide Cleanly Delivers Staples to Plunger Assembly and Balances Tool by Directing Weight Over Stapler Head

## **SECURES A LAYOUT OF PEX TO A WOODEN SUB-FLOOR, OR FOAMBOARD BASE, FASTER THAN ANY OTHER LAYOUT METHOD**

- Fast One-Handed Stapling in a Single Stroke . Other manual and air staplers for PEX-TO-WOOD applications require a minimum 3-hit cycle to seat staples.
- Stapler Head Holds PEX in Place as Staples are Installed
- Smooth Plunger Action Eliminates Risk of Deforming Connection or Jamming Stapler
- Exclusive Staple Designs Offer Superior Pull Strength

## **Exclusive Malco Plastic Staple Designs: PEX TO WOOD STAPLES**

- PEX to Wood staples feature two .083 x 3/4-in. ring-shank stainless steel nails for superior pull strength in a wooden sub-floor. Other staples for PEX-TO-WOOD applications have a taller profile that requires more thin-set concrete to cover PEX layout.

## **FOAMBOARD STAPLES**

- The No. PWS1 Stapler also accepts staples for securing PEX to a 1 or 2-inch (25.4 or 50.8 mm) foamboard base.
- Foamboard Staples feature dual barbs for increased bite and superior holding power. Additional barbs on 2-1/2-in (63.5 mm) staple "double hold in 2-in (50.8 mm) foamboard.


## **No. PWSK1 Conversion Kit Available for FBS and FBSN Staplers**

Modify your Malco No. FBSN or FBS Foamboard Stapler to also secure PEX to a wooden sub-floor. Kit includes weight cylinder and easy instructions.


**NOTE: FBSN Foamboard-Only Staplers are still available.**



No. PWS2  
1-1/16-in (27.0 mm)  
PEX TO WOOD STAPLE



No. FBSN2  
2 1/2-in (63.5mm)  
2-N FOAMBOARD STAPLE

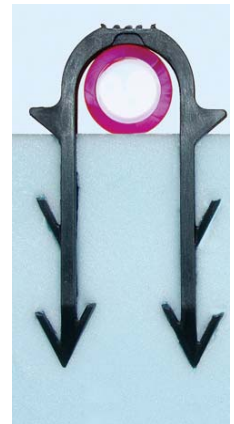

No. FBSN1  
1-1/2-in (38.1 mm)  
1-IN FOAMBOARD STAPLE

Catalog Number	Barcode	Description	Staple Usage / Material Capacity			Dimensions Inches (mm)	Net Wt lb (kg)	Pkg Qty
			Wood Sub-Floor	Foamboard 1-in (25.4 mm)	Foamboard 2-in (50.8 mm)			
PWS1	53936	Stapler, Wood & Foamboard	PWS2	FBSN1	FBSN2	37x11-1/4x2-1/2 (940x286x64)	4.4 (2.01)5	1
PWS2	53937	Staple, PEX to Wood	yes	n/a	n/a	1-1/8 (28.6)	n/a	200
PWSK1	53938	PEX to wood Conversion Kit for FBS & FBSN	n/a	n/a	n/a	1/2 (63.5 mm)	n/a	200
FBSN	53273	Stapler, Foamboard (still available)	n/a	FBSN1	FBSN2	37x11-1/4x2-1/2 (940x286x64)	2.9 (1.33)	1
FBSN1	53274	Staple, Foamboard	n/a	yes	n/a	1-1/2 (38.1 mm)	n/a	200
FBSN2	53275	Staple, Foamboard	n/a	n/a	yes	2-1/2 (63.5 mm)	n/a	200